

PRODUCT CATALOGUE



COMPANY PROFILE

With a legacy spanning over 100 years, CEAT has been a pioneer in global tyre manufacturing since its founding in 1924 in Turin, Italy. The brand entered India in 1958 and became part of the RPG Group-one of India's most respected business conglomerates with a diversified global footprint across 135+ countries and an annual turnover of US\$ 5.2 billion.

Today, CEAT is one of India's leading tyre manufacturers, delivering high-performance solutions to Original Equipment Manufacturers (OEMs) and aftermarket customers worldwide. With an annual revenue of ₹ 11,315 crore, CEAT continues to drive innovation, safety, and reliability across its product portfolio.

CEAT's commitment to quality is reflected in its receipt of the Deming Grand Prize, making it the first tyre company outside Japan to earn this prestigious recognition for excellence in Total Quality Management (TQM). CEAT is also the world's first tyre brand to receive the Lighthouse Certification from the World Economic Forum, underscoring its leadership in digital transformation and smart manufacturing.



CEAT Specialty: Off-Highway Excellence

CEAT Specialty, a dedicated division of CEAT Ltd., focuses on off-highway tyres for agriculture, mining, construction, and industrial applications. With a state-of-the-art facility for Agri-radials and a global footprint in over 120 countries, CEAT Specialty delivers radial tyres engineered for durability, traction, and performance in the most demanding environments.

As the exclusive tyre brand to achieve the Deming Grand 2023 certification, CEAT Specialty exemplifies a culture of continuous improvement and operational excellence. Its commitment to innovation and product integrity has been recognized through:

Manufacturing Facilities & Global Reach

CEAT directly employs over 5,000 people across seven state-of-the-art manufacturing plants in India and Sri Lanka. The company offers a comprehensive range of tyres designed for diverse vehicle categories—including Scooter, Bike, 3-Wheeler, Car, Bus, Light Commercial Vehicle (LCV), Truck, and Tractor—catering to both commercial and personal mobility needs.

With a presence in over 110 countries, CEAT's business operations span continents through nine strategic geographical clusters. Its global footprint is supported by seven regional offices located in Brazil, Dubai, Germany, India, Indonesia, Nepal, and the Philippines—ensuring seamless service and market responsiveness across key international territories.

Technology & Innovation

CEAT's unwavering commitment to research and development keeps it at the forefront of global tyre innovation. Backed by decades of engineering expertise, CEAT leverages advanced design capabilities, cutting-edge testing infrastructure, and state-of-the-art R&D facilities to deliver tyres that meet the evolving demands of modern mobility.

From material science to tread optimization, every product is engineered for precision, durability, and performance. This ensures CEAT tyres excel across diverse terrains and applications. This technology-first approach empowers CEAT to address complex customer needs worldwide, while continuously pushing the boundaries of safety, efficiency and sustainability.

Market Presence & OEM Partnerships

CEAT has been exporting tyres since 1964, steadily building a strong global footprint. Today, CEAT tyres are trusted in over 115 countries, supported by robust distribution networks and region-specific product strategies.

In India, CEAT holds a significant market share and is one of the largest suppliers to OEMs across all major vehicle categories. The company works closely with 27+ key OEM partners, delivering high-performance, customized tyre solutions for a wide range of applications—including trucks, light commercial vehicles (LCVs), passenger cars (PCs), utility vehicles (UVs), tractors, trailers, and two-wheelers.



INDEX

CATEGORY INDEX

Segment	Pattern Name	Page
HIGH POWER TRACTORS	TORQUEMAX VF/IF	34
	FARMAX HPT	51
SPRAYERS	SPRAYMAX	59
MID & LOW HP TRACTORS	FARMAX R65	69
	FARMAX R65 X3	80
	FARMAX R70/R75	83
	FARMAX R80	99
	FARMAX R85	103
	FARMAX R90	116
	FARMAX R85/90 R2	117
MULTIPURPOSE TRACTOR	MULTILOADMAX	120
HARVESTER	YIELDMAX	133
	YIELDMAX VFLEX	137
ROW CROP	FARMAX RC	139
RADIAL FLOTATION	FLOATMAX FT	156
	FLOATMAX RT	171
	FLOATMAX CARGO XL	179
	FLOATMAX VF X3	182
RADIAL IMPLEMENT	FARM IMPLEMENT 800R	186
	HI-FLEX IMPLEMENT	190
AGRO INDUSTRIAL	LOAD PRO HARD SURFACE	194
	LOAD PRO	198
	LIFT PRO	105
TURF AND UTILITY	LAWNMAX	207
Agriculture (EV Tractor)	ENERGYMAX	217

INDEX

CATEGORY INDEX

Segment	Pattern Name	Page
BIAS TRACTOR	FARMAX R1	220
	FARMAX R2	232
	FARMAX F2	238
	FARMAX X3 TF	241
	FARMAX F2M	244
BIAS HARVESTER	FARMAX R1 HD	247
	YIELDMAX 23°	249
BIAS IMPLEMENT	FARMAX AS	252
	FARM IMPLEMENT AWI 305	253
	FARM IMPLEMENT 404	257
	FARM IMPLEMENT- 1	260
	FARM IMPLEMENT LP	262
	HIGHWAY IMPLEMENT T422	263
BIAS FLOTATION	FLOTATION PLUS	266
	FLOTATION T422	268
	T422 VALUE-PRO	273
	FLOTATION TX440	275
	TR 800	278
IRRIGATION	IRROGATOR	280
TURF	TURF XL	282
FORESTRY	LOGGER XL	287
	FOREST XL	289
CONSTRUCTION & INDUSTRIAL	GM LOADER HD	291
	GRIP X HD	293
	GRIP XL 5	295
	LOADER PRO HD	297
	MPT 503	298
	MPT 602	299
	MPT 800	302
	MPT 808	303
	TYROCK	306
	TYROCK SUPER	307
	TYROCK SUPER X3	308
	GRIPMASTER EX	312
	GRADER XL	314
	GRADER XL PLUS	316
	GMND GRADER G3	318
	GRIP MASTER - ND	319
	LOADER XL	322
	TRAC XL	324
	C 305	326
	LOAD PRO	328
AGRO INDUSTRIAL	LIFT PRO	329
MINING	ROCK XL	331
	GM XL	333
PORT & MATERIAL HANDLING	PORT PRO RX	335
	PORT PRO TX	336
	PORT XL PLUS	337
	PORT PRO SL	338
	SLICK 404	339
	SLICK 431	341
	ELEVETA X3	342
	ELEVETA PLUS	345
	FARMAX +R1	346

INDEX

CATEGORY INDEX

TYRE CARE & USAGE MANUAL	Page
WARRANTY POLICY	347
GENERAL INFORMATION	349
TYRE DESCRIPTION & NOMENCLATURE	350
TYRE SIDEWALL MARKING	352
LOAD INDEX & SPEED SYMBOL	353
RMA CODE	354
CONVERSION TABLE	355
TYRE CARE & MAINTENANCE GUIDELINES	356

Disclaimer: ■ All tyres conform to TRA & ETRTO standards. ■ Images are for representative purposes only.
■ Technical specifications are subject to change without prior notice. Claim available on CEAT Assist app.

SKU CODE INDEX

RADIAL						
SL No.	RIM SIZE	SKU CODE	SIZE	PATTERN	LI/SS	
1	DW18L	106410	IF520/85R38 TORQUEMAX 167D TL	TORQUEMAX	167D	
2	DW21B	106453	IF600/70R30 TORQUEMAX 165D TL	TORQUEMAX	165D	
3	DW21B	106455	IF600/70R34 TORQUEMAX 160D TL	TORQUEMAX	160D	
4	DW21B	106456	IF600/70R34 TORQUEMAX 167D TL	TORQUEMAX	167D	
5	DW23B	106454	IF650/60R34 TORQUEMAX 159D TL	TORQUEMAX	159D	
6	DW25B	106411	IF710/70R38 CFO TORQUEMAX 178D TL	TORQUEMAX	178D	
7	DW25B	113107	IF710/70R38 CFO TORQUEMAX 181A8/178B TL	TORQUEMAX	181A8/178B	
8	DW25B	107822	IF710/70R42 TORQUEMAX 179D TL	TORQUEMAX	179D	
9	DW25B	114963	IF710/75R42 CFO TORQUEMAX 176D TL	TORQUEMAX	176D	
10	DW27B	113911	IF800/70R38 CFO TORQUEMAX 190D TL	TORQUEMAX	190D	
11	DW30B	114467	IF850/75R42 CFO TORQUEMAX 186D TL	TORQUEMAX	186D	
12	DW30B	#N/A	IF900/75R32 CFO TORQUEMAX 185D TL	TORQUEMAX	185D	
13	DW13	#N/A	VF380/85R34 TORQUEMAX 149D TL	TORQUEMAX	149D	
14	DW13	113904	VF380/85R46 TORQUEMAX 162D TL	TORQUEMAX	162D	
15	DW18L	107778	VF520/60R28 TORQUEMAX 149D TL	TORQUEMAX	149D	
16	DW18L	113690	VF520/85R38 TORQUEMAX 170D TL	TORQUEMAX	170D	
17	DW18L	114614	VF520/85R42 TORQUEMAX 174D TL	TORQUEMAX	174D	
18	DW18L	107774	VF520/85R46 CFO TORQUEMAX 179D TL	TORQUEMAX	179D	
19	DW20B	113689	VF540/65R30 NRO TORQUEMAX 158D TL	TORQUEMAX	158D	
20	DW20L	114468	VF580/80R34 CFO TORQUEMAX 178D TL	TORQUEMAX	178D	
21	DW18B	112914	VF580/85R42 TORQUEMAX 183D TL	TORQUEMAX	183D	
22	DW20B	#N/A	VF600/60R28 NRO TORQUEMAX 157D TL	TORQUEMAX	157D	
23	DW20B	114065	VF600/60R30 TORQUEMAX 162D TL	TORQUEMAX	162D	
24	DW20B	113828	VF600/60R34 TORQUEMAX 160D TL	TORQUEMAX	160D	
25	DW21B	114471	VF600/65R28 NRO TORQUEMAX 163D TL	TORQUEMAX	163D	
26	DW21L	113827	VF600/70R30 TORQUEMAX 170D TL	TORQUEMAX	170D	
27	DW21B	#N/A	VF620/70R26 TORQUEMAX 173D TL	TORQUEMAX	173D	
28	DW21B	113909	VF620/70R30 TORQUEMAX 175D TL	TORQUEMAX	175D	
29	DW21	107579	VF620/70R46 TORQUEMAX 179D TL	TORQUEMAX	179D	
30	DW21B	107699	VF620/75R30 TORQUEMAX 172D TL	TORQUEMAX	172D	
31	DW23B	112915	VF650/60R34 TORQUEMAX 168D TL	TORQUEMAX	168D	
32	DW23B	#N/A	VF650/60R38 TORQUEMAX 173D TL	TORQUEMAX	173D	
33	DW23B	113688	VF650/65R34 NRO TORQUEMAX 167D TL	TORQUEMAX	167D	
34	DW23B	114956	VF650/65R34 NRO TORQUEMAX 170D TL	TORQUEMAX	170D	
35	DW23B	113910	VF650/65R38 NRO TORQUEMAX 175D TL	TORQUEMAX	175D	
36	DW23B	115029	VF650/65R42 NRO TORQUEMAX 174D TL	TORQUEMAX	174D	
37	DW21B	113907	VF650/85R38 TORQUEMAX 182D TL	TORQUEMAX	182D	
38	DW23	113908	VF650/85R42 TORQUEMAX 183D TL	TORQUEMAX	183D	
39	DW25B	107775	VF710/55R30 NRO TORQUEMAX 165D TL	TORQUEMAX	165D	
40	DW25	113592	VF710/55R34 NRO TORQUEMAX 170D TL	TORQUEMAX	170D	
41	DW25B	107437	VF710/60R30 NRO TORQUEMAX 171D TL	TORQUEMAX	171D	
42	DW25B	#N/A	VF710/60R34 TORQUEMAX 173D TL	TORQUEMAX	173D	
43	DW24B	#N/A	VF710/60R38 NRO TORQUEMAX 171D TL	TORQUEMAX	171D	
44	DW25B	114475	VF710/60R42 NRO TORQUEMAX 173D TL	TORQUEMAX	173D	
45	DW25B	112749	VF710/70R38 TORQUEMAX 178D TL	TORQUEMAX	178D	
46	DW25B	113977	VF710/70R42 CFO TORQUEMAX 185D TL	TORQUEMAX	185D	
47	DW24B	107575	VF710/75R42 TORQUEMAX 184D TL	TORQUEMAX	184D	
48	DW27B	113813	VF750/65R26 CFO TORQUEMAX 180D TL	TORQUEMAX	180D	
49	DW25B	112939	VF750/75R46 TORQUEMAX 189D TL	TORQUEMAX	189D	
50	DW28B	113812	VF800/65R32 CFO TORQUEMAX 184D TL	TORQUEMAX	184D	
51	DW28B	114474	VF800/70R38 TORQUEMAX 187D TL	TORQUEMAX	187D	
52	DW30B	113985	VF900/60R38 TORQUEMAX 193D TL	TORQUEMAX	193D	
53	DW30B	#N/A	VF900/60R42 TORQUEMAX 189D TL	TORQUEMAX	189D	
54	DW30	107786	VF900/65R46 TORQUEMAX 196D TL	TORQUEMAX	196D	
55	DW16L	106365	480/80R50 FARMAX HPT 159D/162A8 TL	FARMAX HPT	159D/162A8	
56	DW16L	106366	480/80R50 FARMAX HPT 165D/168A8 TL	FARMAX HPT	165D/168A8	
57	DW16L	113620	480/80R50 FARMAX HPT 176D/179A8 TL	FARMAX HPT	176D/179A8	
58	DW20B	113833	600/65R28 FARMAX HPT 154D/157A8 TL	FARMAX HPT	154D/157A8	
59	DW20B	107581	600/70R28 FARMAX HPT 157D/160A8 TL	FARMAX HPT	157D/160A8	

SKU CODE INDEX

RADIAL						
SL No.	RIM SIZE	SKU CODE	SIZE	PATTERN	LI/SS	
60	DW20B	107582	600/70R30 FARMAX HPT 158D/161A8 TL	FARMAX HPT	158D/161A8	
61	DW20B	112746	600/70R30 FARMAX HPT 168D/171A8 TL	FARMAX HPT	168D/171A8	
62	DW20B	113589	600/70R34 FARMAX HPT 160D/163A8 TL	FARMAX HPT	160D/163A8	
63	DW20B	113686	650/65R34 FARMAX HPT 161D/164A8 TL	FARMAX HPT	161D/164A8	
64	DW21B	107831	650/75R38 FARMAX HPT 169D/172A8 TL	FARMAX HPT	169D/172A8	
65	DW23B	106374	650/85R38 FARMAX HPT 170D/173A8 TL	FARMAX HPT	170D/173A8	
66	DW23B	106375	650/85R38 FARMAX HPT 173D/176A8 TL	FARMAX HPT	173D/176A8	
67	DW23B	107668	710/70R38 FARMAX HPT 171D/174A8 TL	FARMAX HPT	171D/174A8	
68	DW23B	110840	710/70R38 FARMAX HPT 178D/181A8 TL	FARMAX HPT	178D/181A8	
69	DW23B	107637	710/70R42 FARMAX HPT 173D/176A8 TL	FARMAX HPT	173D/176A8	
70	DW23B	107835	710/70R42 FARMAX HPT 176D/179A8 TL	FARMAX HPT	176D/179A8	
71	DW23B	107618	710/75R42 FARMAX HPT 181D/184A8 TL	FARMAX HPT	181D/184A8	
72	DW23B	107619	710/75R42 FARMAX HPT 175D/178A8 TL	FARMAX HPT	175D/178A8	
73	DW27B	107669	800/70R38 FARMAX HPT 178D/181A8 TL	FARMAX HPT	178D/181A8	
74	DW27B	114083	800/70R38 FARMAX HPT 187D/190A8 TL	FARMAX HPT	187D/190A8	
75	DW27B	113978	850/80R38 FARMAX HPT 180D/183A8 TL	FARMAX HPT	180D/183A8	
76	DW10	113870	VF320/85R38 SPRAYMAX 155D TL	SPRAYMAX	155D	
77	W11	114612	VF320/90R42 SPRAYMAX 163D TL	SPRAYMAX	163D	
78	DW11	113903	VF320/90R50 SPRAYMAX 169D TL	SPRAYMAX	169D	
79	DW11	112938	VF320/90R54 SPRAYMAX 168D TL	SPRAYMAX	168D	
80	W13	#N/A	VF380/105R50 SPRAYMAX 179D TL	SPRAYMAX	179D	
81	W13	106938	VF380/105R54 SPRAYMAX 168D TL	SPRAYMAX	168D	
82	W13	#N/A	VF380/105R54 SPRAYMAX 180D TL	SPRAYMAX	180D	
83	DW12	113590	VF380/80R38 SPRAYMAX 167D TL	SPRAYMAX	167D	
84	W13	113691	VF380/90R46 CFO SPRAYMAX 173D TL	SPRAYMAX	173D	
85	W13	107369	VF380/90R50 SPRAYMAX 175D TL	SPRAYMAX	175D	
86	W13	107370	VF380/90R54 SPRAYMAX 176D TL	SPRAYMAX	176D	
87	W14L	#N/A	VF420/95R50 SPRAYMAX 177D TL	SPRAYMAX	177D	
88	DW16L	#N/A	VF480/80R42 SPRAYMAX 162D TL	SPRAYMAX	162D	
89	DW16L	#N/A	VF480/80R42 SPRAYMAX 176D TL	SPRAYMAX	176D	
90	DW16L	114611	VF480/80R46 SPRAYMAX 177D TL	SPRAYMAX	177D	
91	DW16	112937	VF480/80R46 SPRAYMAX 164D TL	SPRAYMAX	164D	
92	DW16L	113693	VF480/80R50 SPRAYMAX 179D TL	SPRAYMAX	179D	
93	DW16L	#N/A	VF480/95R50 SPRAYMAX 181D TL	SPRAYMAX	181D	
94	DW16L	#N/A	VF480/95R54 SPRAYMAX 180D TL	SPRAYMAX	180D	
95	DW25B	#N/A	VF750/60R46 SPRAYMAX 189D TL	SPRAYMAX	189D	
96	W10	106784	320/65R16 FARMAX R65 117D TL	FARMAX R65	117D	
97	W10	106785	320/65R18 FARMAX R65 109D TL	FARMAX R65	109D	
98	W11	106782	340/65R18 FARMAX R65 122D TL	FARMAX R65	122D	
99	W11	105986	340/65R20 FARMAX R65 124D TL	FARMAX R65	124D	
100	W13	105987	420/65R20 FARMAX R65 135D TL	FARMAX R65	135D	
101	W13	105982	420/65R24 FARMAX R65 138D TL	FARMAX R65	138D	
102	W14L	105988	440/65R20 FARMAX R65 138D TL	FARMAX R65	138D	
103	W14L	105666	440/65R24 FARMAX R65 128D TL	FARMAX R65	128D	
104	W14L	105945	440/65R24 FARMAX R65 135D TL	FARMAX R65	135D	
105	W14L	105667	440/65R28 FARMAX R65 138D TL	FARMAX R65	138D	
106	W15L	105256	480/65R24 FARMAX R65 133D TL	FARMAX R65	133D	
107	W15L	105939	480/65R24 FARMAX R65 140D TL	FARMAX R65	140D	
108	W16L	105332	540/65R24 FARMAX R65 140D TL	FARMAX R65	140D	
109	W16L	105670	540/65R24 FARMAX R65 146D TL	FARMAX R65	146D	
110	W16L	113906	540/65R26 FARMAX R65 141D TL	FARMAX R65	141D	
111	W16L	105336	540/65R34 FARMAX R65 145D TL	FARMAX R65	145D	
112	W16L	105673	540/65R34 FARMAX R65 152D TL	FARMAX R65	152D	
113	W16L	105669	540/65R38 FARMAX R65 147D TL	FARMAX R65	147D	
114	W16L	105674	540/65R38 FARMAX R65 153D TL	FARMAX R65	153D	
115	DW20B	105668	600/65R28 FARMAX R65 154D TL	FARMAX R65	154D	
116	DW20B	105985	600/65R28 FARMAX R65 147D TL	FARMAX R65	147D	
117	DW20B	105989	600/65R30 FARMAX R65 149D TL	FARMAX R65	149D	
118	DW20B	106255	600/65R30 FARMAX R65 155D TL	FARMAX R65	155D	
119	DW20B	105337	600/65R34 FARMAX R65 151D TL	FARMAX R65	151D	
120	DW20B	105675	600/65R34 FARMAX R65 157D TL	FARMAX R65	157D	

SKU CODE INDEX

RADIAL						
SL No.	RIM SIZE	SKU CODE	SIZE	PATTERN	LI/SS	
121	DW20B	105409	600/65R38 FARMAX R65 153D TL	FARMAX R65	153D	
122	W15L	115016	480/65R28 FARMAX R65 X3 142D TL	FARMAX R65 X3	142D	
123	W16L	114718	540/65R28 FARMAX R65 X3 149D TL	FARMAX R65 X3	149D	
124	W16L	114750	540/65R30 FARMAX R65 X3 150D TL	FARMAX R65 X3	150D	
125	DW20B	114751	650/65R38 FARMAX R65 X3 163D TL	FARMAX R65 X3	163D	
126	DW20B	114748	650/65R42 FARMAX R65 X3 170D TL	FARMAX R65 X3	170D	
127	W6	113335	200/70R16 FARMAX R70/R75 94D/97A8 TL	FARMAX R70/R75	94D/97A8	
128	W8	113515	240/70R16 FARMAX R70/R75 104D/107A8 TL	FARMAX R70/R75	104D/107A8	
129	W8	113517	260/70R16 FARMAX R70/R75 109D/112A8 TL	FARMAX R70/R75	109D/112A8	
130	W8	113501	260/70R20 FARMAX R70/R75 113D/116A8 TL	FARMAX R70/R75	113D/116A8	
131	W8L	113333	280/70R16 FARMAX R70/R75 112D/115A8 TL	FARMAX R70/R75	112D/115A8	
132	W8L	113513	280/70R18 FARMAX R70/R75 114D/117A8 TL	FARMAX R70/R75	114D/117A8	
133	W8	113499	280/70R20 FARMAX R70/R75 116D/119A8 TL	FARMAX R70/R75	116D/119A8	
134	W9	113344	300/70R20 FARMAX R70/R75 120D/123A8 TL	FARMAX R70/R75	120D/123A8	
135	W9	113401	300/70R20 FARMAX R70/R75 110D/113A8 TL	FARMAX R70/R75	110D/113A8	
136	W10	113531	320/70R20 FARMAX R70/R75 113D/116A8 TL	FARMAX R70/R75	113D/116A8	
137	W10	113455	320/70R20 FARMAX R70/R75 123D/126A8 TL	FARMAX R70/R75	123D/126A8	
138	W10	113479	320/70R24 FARMAX R70/R75 116D/119A8 TL	FARMAX R70/R75	116D/119A8	
139	W10	113461	320/70R28 FARMAX R70/R75 119D/122A8 TL	FARMAX R70/R75	119D/122A8	
140	W11	113524	360/70R20 FARMAX R70/R75 120D/123A8 TL	FARMAX R70/R75	120D/123A8	
141	W11	113469	360/70R20 FARMAX R70/R75 129D/132A8 TL	FARMAX R70/R75	129D/132A8	
142	W11	113463	360/70R24 FARMAX R70/R75 122D/125A8 TL	FARMAX R70/R75	122D/125A8	
143	W11	113459	360/70R28 FARMAX R70/R75 125D/128A8 TL	FARMAX R70/R75	125D/128A8	
144	W12	113520	380/70R20 FARMAX R70/R75 122D/125A8 TL	FARMAX R70/R75	122D/125A8	
145	W12	113457	380/70R20 FARMAX R70/R75 132D/135A8 TL	FARMAX R70/R75	132D/135A8	
146	W12	106682	380/70R24 FARMAX R70/R75 125D/128A8 TL	FARMAX R70/R75	125D/128A8	
147	W12	113467	380/70R28 FARMAX R70/R75 127D/130A8 TL	FARMAX R70/R75	127D/130A8	
148	W13	113337	400/75R38 FARMAX R70/R75 138D/141A8 TL	FARMAX R70/R75	138D/141A8	
149	W13	106680	420/70R24 FARMAX R70/R75 130D/133A8 TL	FARMAX R70/R75	130D/133A8	
150	W13	106679	420/70R28 FARMAX R70/R75 133D/136A8 TL	FARMAX R70/R75	133D/136A8	
151	W13	113477	420/70R30 FARMAX R70/R75 134D/137A8 TL	FARMAX R70/R75	134D/137A8	
152	W15L	113471	480/70R24 FARMAX R70/R75 138D/141A8 TL	FARMAX R70/R75	138D/141A8	
153	W15L	113410	480/70R28 FARMAX R70/R75 140D/143A8 TL	FARMAX R70/R75	140D/143A8	
154	W15L	113354	480/70R28 FARMAX R70/R75 151D/154A8 TL	FARMAX R70/R75	151D/154A8	
155	W15L	113465	480/70R30 FARMAX R70/R75 141D/144A8 TL	FARMAX R70/R75	141D/144A8	
156	W15L	105659	480/70R30 FARMAX R70/R75 147D/150A8 TL	FARMAX R70/R75	147D/150A8	
157	W15L	113403	480/70R34 FARMAX R70/R75 143D/146A8 TL	FARMAX R70/R75	143D/146A8	
158	W15L	113405	480/70R34 FARMAX R70/R75 149D/152A8 TL	FARMAX R70/R75	149D/152A8	
159	W15L	113348	480/70R34 FARMAX R70/R75 155D/158A8 TL	FARMAX R70/R75	155D/158A8	
160	W15L	113356	480/70R38 FARMAX R70/R75 145D/148A8 TL	FARMAX R70/R75	145D/148A8	
161	W16L	113358	520/70R30 FARMAX R70/R75 145D/148A8 TL	FARMAX R70/R75	145D/148A8	
162	W16L	113408	520/70R34 FARMAX R70/R75 148D/151A8 TL	FARMAX R70/R75	148D/151A8	
163	W16L	113352	520/70R34 FARMAX R70/R75 168D/171A8 TL	FARMAX R70/R75	168D/171A8	
164	W16L	106681	520/70R38 FARMAX R70/R75 150D/153A8 TL	FARMAX R70/R75	150D/153A8	
165	W18L	113383	580/70R38 FARMAX R70/R75 180D/183A8 TL	FARMAX R70/R75	180D/183A8	
166	W18L	113372	580/70R38 FARMAX R70/R75 155D/158A8 TL	FARMAX R70/R75	155D/158A8	
167	W18L	113381	580/70R38 FARMAX R70/R75 170D/173A8 TL	FARMAX R70/R75	170D/173A8	
168	W18L	106480	580/70R42 FARMAX R70/R75 158D/161A8 TL	FARMAX R70/R75	158D/161A8	
169	DW20B	113366	600/70R28 FARMAX R70/R75 161D/164A8 TL	FARMAX R70/R75	161D/164A8	
170	DW20B	113368	600/70R30 FARMAX R70/R75 152D/155A8 TL	FARMAX R70/R75	152D/155A8	
171	DW20B	106256	600/70R30 FARMAX R70/R75 158D/161A8 TL	FARMAX R70/R75	158D/161A8	
172	DW20B	113330	620/70R42 FARMAX R70/R75 166D/169A8 TL	FARMAX R70/R75	166D/169A8	
173	DW20B	113328	620/70R42 FARMAX R70/R75 173D/176A8 TL	FARMAX R70/R75	173D/176A8	
174	DW23B	113370	710/70R38 FARMAX R70/R75 172D/175A8 TL	FARMAX R70/R75	172D/175A8	
175	DW23B	106349	710/70R38 FARMAX R70/R75 178D/181A8 TL	FARMAX R70/R75	178D/181A8	
176	DW23B	106350	710/70R42 FARMAX R70/R75 173D/176A8 TL	FARMAX R70/R75	173D/176A8	
177	W12	107590	380/80R38 FARMAX R80 154D/157A8 TL	FARMAX R80	154D/157A8	
178	W13	106458	420/80R46 FARMAX R80 151D/154A8 TL	FARMAX R80	151D/154A8	
179	W13	106459	420/80R46 FARMAX R80 159D/162A8 TL	FARMAX R80	159D/162A8	
180	DW16L	106838	480/80R26(18.4R26) FARMAX R80 143D/146A8 TL	FARMAX R80	143D/146A8	
181	DW16L	115065	480/80R38 FARMAX R80 149D TL	FARMAX R80	149D	

SKU CODE INDEX

RADIAL						
SL No.	RIM SIZE	SKU CODE	SIZE	PATTERN	LI/SS	
182	DW16L	114162	480/80R42 FARMAX R80 151D/154A8 TL	FARMAX R80	151D/154A8	
183	DW16L	114164	480/80R42 FARMAX R80 153D/156A8 TL	FARMAX R80	153D/156A8	
184	DW16L	114166	480/80R42 FARMAX R80 169D/172A8 TL	FARMAX R80	169D/172A8	
185	DW16L	114168	480/80R46 FARMAX R80 158D/161A8 TL	FARMAX R80	158D/161A8	
186	DW16L	114170	480/80R46 FARMAX R80 164D/167A8 TL	FARMAX R80	164D/167A8	
187	4.00E	114749	180/85R12 FARMAX R85 80A8/B TL	FARMAX R85	80A8/B	
188	W8	113507	250/85R20 FARMAX R85 116D/119A8 TL	FARMAX R85	116D/119A8	
189	W8	113437	250/85R24 FARMAX R85 109D/112A8 TL	FARMAX R85	109D/112A8	
190	W8	113505	250/85R28 FARMAX R85 112D/115A8 TL	FARMAX R85	112D/115A8	
191	W10	113424	280/85R20 FARMAX R85 112D/115A8 TL	FARMAX R85	112D/115A8	
192	W10	113322	280/85R24 FARMAX R85 115D/118A8 TL	FARMAX R85	115D/118A8	
193	W10	113417	280/85R28 FARMAX R85 118D/121A8 TL	FARMAX R85	118D/121A8	
194	W11	113443	320/85R20 FARMAX R85 119D/122A8 TL	FARMAX R85	119D/122A8	
195	W11	113326	320/85R24 FARMAX R85 122D/125A8 TL	FARMAX R85	122D/125A8	
196	W11	113324	320/85R24 FARMAX R85 142D/145A8 TL	FARMAX R85	142D/145A8	
197	W11	113473	320/85R28 FARMAX R85 124D/127A8 TL	FARMAX R85	124D/127A8	
198	W11	113526	320/85R32 FARMAX R85 126D/129A8 TL	FARMAX R85	126D/129A8	
199	W11	113454	320/85R32 FARMAX R85 142D/145A8 TL	FARMAX R85	142D/145A8	
200	W11	113528	320/85R32 FARMAX R85 145D/148A8 TL	FARMAX R85	145D/148A8	
201	W11	113482	320/85R34 FARMAX R85 141D/144A8 TL	FARMAX R85	141D/144A8	
202	W11	113503	320/85R36 FARMAX R85 128D/131A8 TL	FARMAX R85	128D/131A8	
203	W11	113449	320/85R38 FARMAX R85 143D/146A8 TL	FARMAX R85	143D/146A8	
204	W12	106685	340/85R24 FARMAX R85 125D/128A8 TL	FARMAX R85	125D/128A8	
205	W12	113509	340/85R28 FARMAX R85 127D/130A8 TL	FARMAX R85	127D/130A8	
206	W12	113497	340/85R36 FARMAX R85 132D/135A8 TL	FARMAX R85	132D/135A8	
207	W12	113543	340/85R38 FARMAX R85 133D/135A8 TL	FARMAX R85	133D/135A8	
208	W12	113530	340/85R38 FARMAX R85 148D/151A8 TL	FARMAX R85	148D/151A8	
209	W12	113452	340/85R38 FARMAX R85 151D/154A8 TL	FARMAX R85	151D/154A8	
210	W12	113544	380/85R24 FARMAX R85 131D/134A8 TL	FARMAX R85	131D/134A8	
211	W12	#N/A	380/85R26 FARMAX R85 132D/135A8 TL	FARMAX R85	132D/135A8	
212	W12	106683	380/85R28 FARMAX R85 133D/136A8 TL	FARMAX R85	133D/136A8	
213	W12	113415	380/85R30 FARMAX R85 135D/138A8 TL	FARMAX R85	135D/138A8	
214	W12	113346	380/85R34 FARMAX R85 137D/140A8 TL	FARMAX R85	137D/140A8	
215	W15	113420	420/85R24 FARMAX R85 137D/140A8 TL	FARMAX R85	137D/140A8	
216	W15L	106252	420/85R26 FARMAX R85 138D/141A8 TL	FARMAX R85	138D/141A8	
217	W15L	#N/A	420/85R28 FARMAX R85 - TL	FARMAX R85	-	
218	W15L	113511	420/85R28 FARMAX R85 139D/142A8 TL	FARMAX R85	139D/142A8	
219	W15L	113422	420/85R30 FARMAX R85 147D/150A8 TL	FARMAX R85	147D/150A8	
220	W15L	106684	420/85R30 FARMAX R85 140D/143A8 TL	FARMAX R85	140D/143A8	
221	W15L	106677	420/85R34 FARMAX R85 142D/145A8 TL	FARMAX R85	142D/145A8	
222	W15L	113374	420/85R34 FARMAX R85 147D/150A8 TL	FARMAX R85	147D/150A8	
223	W15L	113441	420/85R38 FARMAX R85 144D/147A8 TL	FARMAX R85	144D/147A8	
224	DW15L	115026	460/85R26 FARMAX R85 143D TL	FARMAX R85	143D	
225	W15L	113439	460/85R30 FARMAX R85 145D/148A8 TL	FARMAX R85	145D/148A8	
226	W15L	113399	460/85R34 FARMAX R85 147D/150A8 TL	FARMAX R85	147D/150A8	
227	W15L	113342	460/85R34 FARMAX R85 157D/160A8 TL	FARMAX R85	157D/160A8	
228	W15L	113378	460/85R38 FARMAX R85 149D/152A8 TL	FARMAX R85	149D/152A8	
229	W15L	113377	460/85R38 FARMAX R85 153D/156A8 TL	FARMAX R85	153D/156A8	
230	W15L	113340	460/85R38 FARMAX R85 167D/170A8 TL	FARMAX R85	167D/170A8	
231	DW16	113545	520/85R38 FARMAX R85 155D/158A8 TL	FARMAX R85	155D/158A8	
232	DW16	113447	520/85R38 FARMAX R85 169D/172A8 TL	FARMAX R85	169D/172A8	
233	DW16L	113350	520/85R42 FARMAX R85 157D/160A8 TL	FARMAX R85	157D/160A8	
234	DW16L	106678	520/85R42 FARMAX R85 169D/172A8 TL	FARMAX R85	169D/172A8	
235	DW16L	113522	520/85R46 FARMAX R85 174D/177A8 TL	FARMAX R85	174D/177A8	
236	DW16L	113445	520/85R46 FARMAX R85 158D/161A8 TL	FARMAX R85	158D/161A8	
237	DW16L	113106	520/85R42 FARMAX R85 R2 157A8/B TL	FARMAX R85 R2	157A8/B	
238	DW13	114305	420/90R30 FARMAX R90 142D/145A8 TL	FARMAX R90	142D/145A8	
239	DW13	114306	420/90R30 FARMAX R90 147D/150A8 TL	FARMAX R90	147D/150A8	
240	DW13	113105	420/90R30 FARMAX R90 R2 147A8/B TL	FARMAX R90 R2	147A8/B	
241	W8	113859	250/80R16 MULTILOADMAX 123D/127A8 TL	MULTILOADMAX	123D/127A8	
242	8.25	115073	265/70R16.5 MULTILOADMAX 130A2/123A8 TL	MULTILOADMAX	130A2/123A8	

SKU CODE INDEX

RADIAL						
SL No.	RIM SIZE	SKU CODE	SIZE	PATTERN	LI/SS	
243	9.75	113867	305/70R16.5 MULTILOADMAX 146A2/138A8 TL	MULTILOADMAX	146A2/138A8	
244	W11	113861	340/80R18 MULTILOADMAX 138D/143A8 TL	MULTILOADMAX	138D/143A8	
245	10.5	113869	360/70R17.5 MULTILOADMAX 156A2/148A8 TL	MULTILOADMAX	156A2/148A8	
246	W11	113860	360/70R20 MULTILOADMAX 131D/136A8 TL	MULTILOADMAX	131D/136A8	
247	W11	113868	360/80R20 MULTILOADMAX 143D/147A8 TL	MULTILOADMAX	143D/147A8	
248	W11	113858	360/80R24 MULTILOADMAX 145D/150A8 TL	MULTILOADMAX	145D/150A8	
249	W11	113974	360/80R28 MULTILOADMAX 142D/146A8 TL	MULTILOADMAX	142D/146A8	
250	13	113981	400/70R18 MULTILOADMAX 143D/147A8 TL	MULTILOADMAX	143D/147A8	
251	13	114038	400/70R20 MULTILOADMAX 144D/149A8 TL	MULTILOADMAX	144D/149A8	
252	DW13	113983	400/80R24 MULTILOADMAX 151D/156A8 TL	MULTILOADMAX	151D/156A8	
253	DW13	114955	400/80R28 MULTILOADMAX 153D/158A8 TL	MULTILOADMAX	153D/158A8	
254	DW14L	113980	440/80R24 MULTILOADMAX 156D/161A8 TL	MULTILOADMAX	156D/161A8	
255	DW14L	113984	440/80R28 MULTILOADMAX 158D/163A8 TL	MULTILOADMAX	158D/163A8	
256	DW14L	113982	440/80R30 MULTILOADMAX 153D/157A8 TL	MULTILOADMAX	153D/157A8	
257	DW14L	113973	440/80R34 MULTILOADMAX 155D/159A8 TL	MULTILOADMAX	155D/159A8	
258	DW15	114848	480/80R34 MULTILOADMAX 159D/164A8 TL	MULTILOADMAX	159D/164A8	
259	DW15L	114465	480/80R38 MULTILOADMAX 161D/166A8 TL	MULTILOADMAX	161D/166A8	
260	DW16L	113769	500/70R24 MULTILOADMAX 159D/164A8 TL	MULTILOADMAX	159D/164A8	
261	W18L	113874	540/70R24 MULTILOADMAX 170D/175A8 TL	MULTILOADMAX	170D/175A8	
262	DW18L	113905	540/80R38 MULTILOADMAX 167D/172A8 TL	MULTILOADMAX	167D/172A8	
263	DW20	114359	600/70R30 MULTILOADMAX 166D/171A8 TL	MULTILOADMAX	166D/171A8	
264	DW23	113905	710/70R42 MULTILOADMAX 180D/185A8 TL	MULTILOADMAX	180D/185A8	
265	36.00VA	#N/A	1050/50R32 CHO YIELDMAX 184A8/B TL	YIELDMAX	184A8/B	
266	DW20B	115028	620/75R26 CHO YIELDMAX 166A8/B TL	YIELDMAX	166A8/B	
267	DW20B	#N/A	620/75R30 CHO YIELDMAX 169A8/B TL	YIELDMAX	169A8/B	
268	DW20B	#N/A	620/75R34 CHO YIELDMAX 170A8/B TL	YIELDMAX	170A8/B	
269	DW21B	114610	650/75R32 CHO YIELDMAX 172A8/B TL	YIELDMAX	172A8/B	
270	DW23B	112935	710/75R34 CHO YIELDMAX 178A8/178B TL	YIELDMAX	178A8/178B	
271	DW25B	114735	750/65R26 CHO YIELDMAX 173A8/B TL	YIELDMAX	173A8/B	
272	DW27B	114734	800/65R32 CHO YIELDMAX 181A8/B TL	YIELDMAX	181A8/B	
273	DW27B	114656	800/70R32 CHO YIELDMAX 181A8/B TL	YIELDMAX	181A8/B	
274	DW28B	114655	900/60R32 CHO YIELDMAX 193A8/B TL	YIELDMAX	193A8/B	
275	DW25B	114735	VF750/50R26 CFO YIELDMAX VFLEX174D	YIELDMAX VFLEX	174D	
276	W7	105684	210/95R32(8.3R32) FARMAX RC 117D/120A8 TL	FARMAX RC	117D/120A8	
277	W7	107438	210/95R36(8.3R36) FARMAX RC 118D/121A8 TL	FARMAX RC	118D/121A8	
278	W7	107436	210/95R44(8.3R44) FARMAX RC 120D/123A8 TL	FARMAX RC	120D/123A8	
279	W9	105685	230/95R32 FARMAX RC 128D/131A8 TL	FARMAX RC	128D/131A8	
280	W8 W7	105687	230/95R36 FARMAX RC 127D/130A8 TL	FARMAX RC	127D/130A8	
281	W7	106248	230/95R36 FARMAX RC 130D/133A8 TL	FARMAX RC	130D/133A8	
282	W7	106371	230/95R40 FARMAX RC 132D/135A8 TL	FARMAX RC	132D/135A8	
283	W7	106372	230/95R42 FARMAX RC 133D/136A8 TL	FARMAX RC	133D/136A8	
284	W7	105693	230/95R44 FARMAX RC 129D/132A8 TL	FARMAX RC	129D/132A8	
285	W7	105694	230/95R44 FARMAX RC 134D/137A8 TL	FARMAX RC	134D/137A8	
286	W7	105323	230/95R48 FARMAX RC 136D/139A8 TL	FARMAX RC	136D/139A8	
287	W9	113826	270/80R32 FARMAX RC 131D/134A8 TL	FARMAX RC	131D/134A8	
288	W9	105686	270/95R32(11.2R32) FARMAX RC 133D/136A8 TL	FARMAX RC	133D/136A8	
289	W9	105688	270/95R36(11.2R36) FARMAX RC 136D/139A8 TL	FARMAX RC	136D/139A8	
290	W9	105689	270/95R38(11.2R38) FARMAX RC 137D/140A8 TL	FARMAX RC	137D/140A8	
291	W9	106249	270/95R38(11.2R38) FARMAX RC 140D/143A8 TL	FARMAX RC	140D/143A8	
292	W9	105691	270/95R42(11.2R42) FARMAX RC 137D/140A8 TL	FARMAX RC	137D/140A8	
293	W9	106254	270/95R42(11.2R42) FARMAX RC 139D/142A8 TL	FARMAX RC	139D/142A8	
294	W9	105695	270/95R44(11.2R44) FARMAX RC 140D/143A8 TL	FARMAX RC	140D/143A8	
295	W9	106280	270/95R44(11.2R44) FARMAX RC 142D/145A8 TL	FARMAX RC	142D/145A8	
296	W9	105696	270/95R46(11.2R46) FARMAX RC 141D/144A8 TL	FARMAX RC	141D/144A8	
297	W9	105324	270/95R48(11.2R48) FARMAX RC 142D/145A8 TL	FARMAX RC	142D/145A8	
298	W9	106492	270/95R54(11.2R54) FARMAX RC 146D/149A8 TL	FARMAX RC	146D/149A8	
299	W9	105697	300/95R46(12.4R46) FARMAX RC 143D/146A8 TL	FARMAX RC	143D/146A8	
300	W9	105330	300/95R46(12.4R46) FARMAX RC 148D/151A8 TL	FARMAX RC	148D/151A8	
301	W9	106479	300/95R52(12.4R52) FARMAX RC 149D/152A8 TL	FARMAX RC	149D/152A8	
302	W10	114172	320/80R42 FARMAX RC 141D/144A8 TL	FARMAX RC	141D/144A8	
303	W10	105692	320/90R42 FARMAX RC 136D/139A8 TL	FARMAX RC	136D/139A8	

SKU CODE INDEX

RADIAL						
SL No.	RIM SIZE	SKU CODE	SIZE	PATTERN	LI/SS	
304	W10	105981	320/90R42 FARMAX RC 144D/147A8 TL	FARMAX RC	144D/147A8	
305	W10	107356	320/90R46(12.4R46) FARMAX RC 146D/149A8 TL	FARMAX RC	146D/149A8	
306	W10	113816	320/90R46(12.4R46) FARMAX RC 148D/151A8 TL	FARMAX RC	148D/151A8	
307	W10	106412	320/90R50 FARMAX RC 150D/ 153A8 TL	FARMAX RC	150D/ 153A8	
308	W10	107353	320/90R54 FARMAX RC 153D/156A8 TL	FARMAX RC	153D/156A8	
309	W12	105698	340/85R46 FARMAX RC 147D/150A8 TL	FARMAX RC	147D/150A8	
310	W12	106258	340/85R46 FARMAX RC 150D/153A8 TL	FARMAX RC	150D/153A8	
311	W12	105331	340/85R48 FARMAX RC 148D/151A8 TL	FARMAX RC	148D/151A8	
312	W12	112916	340/85R48 FARMAX RC 156D/159A8 TL	FARMAX RC	156D/159A8	
313	W12	107749	380/105R50 FARMAX RC 168D/171A8 TL	FARMAX RC	168D/171A8	
314	W12	106250	380/90R46(14.9R46) FARMAX RC 159D/162A8 TL	FARMAX RC	159D/162A8	
315	W12	107517	380/90R46(14.9R46) FARMAX RC 162D/165A8 TL	FARMAX RC	162D/165A8	
316	W12	105329	380/90R46(14.9R46) FARMAX RC 165A8/B TL	FARMAX RC	165A8/B	
317	W12	113313	380/90R50(14.9R50) FARMAX RC 151D/154A8 TL	FARMAX RC	151D/154A8	
318	W12	113862	380/90R50(14.9R50) FARMAX RC 158D/161A8 TL	FARMAX RC	158D/161A8	
319	14	105702	440/55R18 FLOATMAX FT 159A8/B TL	FLOATMAX FT	159A8/B	
320	AG16.00	106945	500/60R22.5 FLOATMAX FT 155D TL	FLOATMAX FT	155D	
321	AG16.00	107639	500/60R22.5 FLOATMAX FT 163D TL	FLOATMAX FT	163D	
322	AG16.00	105703	560/45R22.5 FLOATMAX FT 152D TL	FLOATMAX FT	152D	
323	AG16.00	114333	560/60R22.5 FLOATMAX FT 164D TL	FLOATMAX FT	164D	
324	AG16.00	105265	560/60R22.5 FLOATMAX FT 161D TL	FLOATMAX FT	161D	
325	AG16.00	114819	580/65R22.5 FLOATMAX FT 166D TL	FLOATMAX FT	166D	
326	AG20.00	113875	600/50R22.5 FLOATMAX FT 159D TL	FLOATMAX FT	159D	
327	AG20.00	114733	600/50R22.5 FLOATMAX FT 168B TL	FLOATMAX FT	168B	
328	AG20.00	107691	600/55R26.5 FLOATMAX FT 165D TL	FLOATMAX FT	165D	
329	AG20.00	112895	600/55R26.5 FLOATMAX FT 178D TL	FLOATMAX FT	178D	
330	AG20.00	107829	600/60R30.5 FLOATMAX FT 173D TL	FLOATMAX FT	173D	
331	AG20.00	107830	650/50R22.5 FLOATMAX FT 163D TL	FLOATMAX FT	163D	
332	AG20.00	113873	650/55R26.5 FLOATMAX FT 178D TL	FLOATMAX FT	178D	
333	AG20.00	107787	650/60R26.5 FLOATMAX FT 173D TL	FLOATMAX FT	173D	
334	AG20.00	107661	650/65R26.5 FLOATMAX FT 174D TL	FLOATMAX FT	174D	
335	AG20.00	113272	650/65R30.5 FLOATMAX FT 176D TL	FLOATMAX FT	176D	
336	AG24.00	113273	710/40R22.5 FLOATMAX FT 161D TL	FLOATMAX FT	161D	
337	AG24.00	113274	710/45R22.5 FLOATMAX FT 165D TL	FLOATMAX FT	165D	
338	AG20.00	114062	710/50R26.5 FLOATMAX FT 170D TL	FLOATMAX FT	170D	
339	AG20.00	114606	710/50R30.5 FLOATMAX FT 173D TL	FLOATMAX FT	173D	
340	AG24.00	113275	750/45R26.5 FLOATMAX FT 170D TL	FLOATMAX FT	170D	
341	AG24.00	113276	750/60R30.5 FLOATMAX FT 181D TL	FLOATMAX FT	181D	
342	AG28.00	113871	800/40R22.5 FLOATMAX FT 170D TL	FLOATMAX FT	170D	
343	AG28.00	113277	800/40R22.5 FLOATMAX FT 176B TL	FLOATMAX FT	176B	
344	AG28.00	114843	800/45R26.5 FLOATMAX FT 174D TL	FLOATMAX FT	174D	
345	AG27.00	107685	800/60R32 FLOATMAX FT 185D TL	FLOATMAX FT	185D	
346	AG28.00	107067	850/40R26.5 FLOATMAX FT 173D TL	FLOATMAX FT	173D	
347	AG28.00	114578	850/50R30.5 FLOATMAX FT 182D TL	FLOATMAX FT	182D	
348	AG11.75	107767	385/65R22.5 FLOATMAX RT 164D TL	FLOATMAX RT	164D	
349	AG16.00	105264	500/60R22.5 FLOATMAX RT 155D TL	FLOATMAX RT	155D	
350	AG16.00	106946	500/60R22.5 FLOATMAX RT 163D TL	FLOATMAX RT	163D	
351	AG16.00	114617	560/45R22.5 FLOATMAX RT 152D TL	FLOATMAX RT	152D	
352	AG16.00	107638	560/60R22.5 FLOATMAX RT 165D TL	FLOATMAX RT	165D	
353	AG16.00	114619	560/60R22.5 FLOATMAX RT 169D TL	FLOATMAX RT	169D	
354	AG16.00	107710	560/60R22.5 FLOATMAX RT 161D TL	FLOATMAX RT	161D	
355	AG16.00	113832	580/65R22.5 FLOATMAX RT 166D TL	FLOATMAX RT	166D	
356	AG20.00	107766	600/55R26.5 FLOATMAX RT 165D TL	FLOATMAX RT	165D	
357	AG20.00	107690	600/55R26.5 FLOATMAX RT 178D TL	FLOATMAX RT	178D	
358	AG20.00	114496	600/60R30.5 FLOATMAX RT 173D TL	FLOATMAX RT	173D	
359	AG20.00	107662	650/50R22.5 FLOATMAX RT 163D TL	FLOATMAX RT	163D	
360	AG20.00	105709	650/55R26.5 FLOATMAX RT 178D TL	FLOATMAX RT	178D	
361	AG20.00	114618	650/65R30.5 FLOATMAX RT 176D TL	FLOATMAX RT	176D	
362	AG20.00	114472	710/50R26.5 FLOATMAX RT 172D TL	FLOATMAX RT	172D	
363	AG20.00	114607	710/50R26.5 FLOATMAX RT 170D TL	FLOATMAX RT	170D	
364	AG20.00	113872	710/50R26.5 FLOATMAX RT 181D TL	FLOATMAX RT	181D	

SKU CODE INDEX

RADIAL						
SL No.	RIM SIZE	SKU CODE	SIZE	PATTERN	LI/SS	PAGE NO.
365	AG20.00	113685	710/50R30.5 FLOATMAX RT 173D TL	FLOATMAX RT	173D	
366	AG24.00	114615	750/60R30.5 FLOATMAX RT 181D TL	FLOATMAX RT	181D	
367	AG28.00	114800	850/50R30.5 FLOATMAX RT 182D TL	FLOATMAX RT	182D	
368	26.5	114615	VF600/55R26.5 FLOATMAX VF X3 170D SB TL	FLOATMAX VF X3	170D	
369	26.5	114800	VF650/60R26.5 FLOATMAX VF X3 174D SB TL	FLOATMAX VF X3	174D	
370	26.5	114801	VF650/65R26.5 FLOATMAX VF X3 179D SB TL	FLOATMAX VF X3	179D	
371	30.5	113979	VF750/60R30.5 FLOATMAX VF X3 187D SB TL	FLOATMAX VF X3	187D	
372	DW25	114613	28LR26 FLOATMAX CARGO XL 176D TL	FLOATMAX CARGO XL	176D	
373	DW20B	113694	620/75R26 FLOATMAX CARGO XL 176D TL	FLOATMAX CARGO XL	176D	
374	DW27B	106633	800/60R32 FLOATMAX CARGO XL 185D TL	FLOATMAX CARGO XL	185D	
375	AG28	114577	VF850/50R30.5 FLOATMAX CARGO XL 188D TL	FLOATMAX CARGO XL	188D	
376	DW30B	105343	VF900/65R32 FLOATMAX CARGO XL 197D TL	FLOATMAX CARGO XL	197D	
377	AG16.00	114801	VF560/60R22.5 FLOATMAX VF X3 166D TL	FLOATMAX VF X3	166D	
378	AG20.00	113979	VF600/55R26.5 FLOATMAX VF X3 170D TL	FLOATMAX VF X3	170D	
379	AG20.00	113311	VF650/60R26.5 FLOATMAX VF X3 174D TL	FLOATMAX VF X3	174D	
380	AG20.00	113312	VF650/65R26.5 FLOATMAX VF X3 179D TL	FLOATMAX VF X3	179D	
381	AG24.00	113975	VF750/60R30.5 FLOATMAX VF X3 187D TL	FLOATMAX VF X3	187D	
382	11	113807	340/60R16.5 FARM IMPLEMENT 800R 145A8/133A8 TL	FARM IMPLEMENT 800R	145A8/133A8	
383	12	107716	380/55R16.5 FARM IMPLEMENT 800R 150A8/138A8 TL	FARM IMPLEMENT 800R	150A8/138A8	
384	14	107715	440/55R18 FARM IMPLEMENT 800R 159A8/147A8 TL	FARM IMPLEMENT 800R	159A8/147A8	
385	16	114844	500/40R16.5 FARM IMPLEMENT 800R 153A8/141A8 TL	FARM IMPLEMENT 800R	153A8/141A8	
386	16	114476	500/50R17 FARM IMPLEMENT 800R 151D TL	FARM IMPLEMENT 800R	151D	
387	AG20.00	113971	620/40R22.5 FARM IMPLEMENT 800R 154D TL	FARM IMPLEMENT 800R	154D	
388	AG20.00	113863	620/50R22.5 FARM IMPLEMENT 800R 161D TL	FARM IMPLEMENT 800R	161D	
389	AG14.00	113972	VF445/50R22.5 FARM IMPLEMENT 800R 167D TL	FARM IMPLEMENT 800R	167D	
390	8LB	113976	IF 240/80R15 HI-FLEX IMPLEMENT 125D TL	HI-FLEX IMPLEMENT	125D	
391	8LB	#N/A	IF 265/85R15 HI-FLEX IMPLEMENT 129D TL	HI-FLEX IMPLEMENT	129D	
392	W8	#N/A	IF 280/70R15 HI-FLEX IMPLEMENT 137D TL	HI-FLEX IMPLEMENT	137D	
393	W10	#N/A	IF 320/70R15 HI-FLEX IMPLEMENT 146D TL	HI-FLEX IMPLEMENT	146D	
394	W11	112942	340/80R18 LOADPRO HARD SURFACE 143A8/B TL	LOADPRO HARD SURFACE	143A8/B	
395	11	113687	365/70R18 LOADPRO HARD SURFACE 142A8/B TL	LOADPRO HARD SURFACE	142A8/B	
396	13	114966	405/70R18 LOADPRO HARD SURFACE 147A8/B TL	LOADPRO HARD SURFACE	147A8/B	
397	13	114965	405/70R20 LOADPRO HARD SURFACE 149A8/B TL	LOADPRO HARD SURFACE	149A8/B	
398	W13	115074	405/70R24 LOADPRO HARD SURFACE 152A8/B TL	LOADPRO HARD SURFACE	152A8/B	
399	W14	112936	440/80R24(16.9R24) LOADPRO HARD SURFACE 161A8/B TL	LOADPRO HARD SURFACE	161A8/B	
400	DW15L	112912	460/70R24 LOADPRO HARD SURFACE 159A8/B TL	LOADPRO HARD SURFACE	159A8/B	
401	DW16L	112941	500/70R24 LOADPRO HARD SURFACE 164A8/B TL	LOADPRO HARD SURFACE	164A8/B	
402	W9	112940	280/80R18 LOADPRO RADIAL 132A8/B TL	LOADPRO RADIAL	132A8/B	
403	W9	112905	280/80R20 LOADPRO RADIAL 133A8/B TL	LOADPRO RADIAL	133A8/B	
404	W9	107491	300/75R18 LOADPRO RADIAL 142A8/B TL	LOADPRO RADIAL	142A8/B	
405	W9	112757	340/80R18 LOADPRO RADIAL 143A8/B TL	LOADPRO RADIAL	143A8/B	
406	W12	112894	380/75R20 LOADPRO RADIAL 148A8/B TL	LOADPRO RADIAL	148A8/B	
407	W13L	107492	400/70R20 LOADPRO RADIAL 149A8/B TL	LOADPRO RADIAL	149A8/B	
408	13	106948	405/70R24 LOADPRO RADIAL 152A8/B TL	LOADPRO RADIAL	152A8/B	
409	DW14L	107209	440/80R24 LOADPRO RADIAL 161A8/B TL	LOADPRO RADIAL	161A8/B	
410	DW14L	107777	440/80R28 LOADPRO RADIAL 156A8/B TL	LOADPRO RADIAL	156A8/B	
411	DW15L	107068	460/70R24 LOADPRO RADIAL 159A8/B TL	LOADPRO RADIAL	159A8/B	
412	DW15L	112911	480/80R26 LOADPRO RADIAL 160A8/B TL	LOADPRO RADIAL	160A8/B	
413	DW15L	113866	480/80R26 LOADPRO RADIAL 167A8/B TL	LOADPRO RADIAL	167A8/B	
414	W15L	113864	500/70R24 LOADPRO RADIAL 164A8/B TL	LOADPRO RADIAL	164A8/B	
415	W15L	113865	500/70R28 LOADPRO RADIAL 164A8/B TL	LOADPRO RADIAL	164A8/B	
416	DW15L	113767	460/70R24 LIFTPRO 159A8/B TL	LIFTPRO	159A8/B	
417	W7	114540	200/60R15 LAWNMAX 83A8/B TL	LAWNMAX	83A8/B	
418	W6	114541	200/65R16 LAWNMAX 94A8/B TL	LAWNMAX	94A8/B	
419	W6	114466	200/70R16 LAWNMAX 94A8/B TL	LAWNMAX	94A8/B	
420	J7	114469	215/65R14 LAWNMAX 90A8/B TL	LAWNMAX	90A8/B	
421	7.00I	114284	220/55R12 LAWNMAX 82A8/B TL	LAWNMAX	82A8/B	
422	8.00B	114290	240/60R12 LAWNMAX 89A8/B TL	LAWNMAX	89A8/B	
423	W8	114609	240/70R16 LAWNMAX 104A8/B TL	LAWNMAX	104A8/B	
424	W8	114620	260/70R16 LAWNMAX 109A8/B TL	LAWNMAX	109A8/B	

SKU CODE INDEX

RADIAL						
SL No.	RIM SIZE	SKU CODE	SIZE	PATTERN	LI/SS	PAGE NO.
425	W8	114546	260/70R18 LAWNMAX 114A8/B TL	LAWNMAX	114A8/B	
426	W8L	114283	280/70R16 LAWNMAX 112A8/B TL	LAWNMAX	112A8/B	
427	W8L	114545	280/70R18 LAWNMAX 114A8/B TL	LAWNMAX	114A8/B	
428	W9	114470	300/70R20 LAWNMAX 110A8/B TL	LAWNMAX	110A8/B	
429	W10	114623	320/65R18 LAWNMAX 109A8/B TL	LAWNMAX	109A8/B	
430	W10	114544	320/70R20 LAWNMAX 113A8/B TL	LAWNMAX	113A8/B	
431	W11	114549	320/85R28 LAWNMAX 124A8/B TL	LAWNMAX	124A8/B	
432	W12	114542	340/85R28 LAWNMAX 127A8/B TL	LAWNMAX	127A8/B	
433	W11	114282	360/70R24 LAWNMAX 122A8/B TL	LAWNMAX	122A8/B	
434	W12	114622	380/70R20 LAWNMAX 122A8/B TL	LAWNMAX	122A8/B	
435	W12	114543	380/70R24 LAWNMAX 125A8/B TL	LAWNMAX	125A8/B	
436	W13	114799	420/70R24 LAWNMAX 130A8/B TL	LAWNMAX	130A8/B	
437	W15L	114752	480/70R30 LAWNMAX 141A8/B TL	LAWNMAX	141A8/B	
438	W6	113768	200/70R16 ENERGYMAX 94D TL	ENERGYMAX	94D	

SKU CODE INDEX

BIAS					
SL No.	RIM SIZE	SKU CODE	SIZE	PATTERN	LI/SS
1	W9	113103	250/80-18 8 PR FARMAX R1 TT	FARMAX R1	115 A8
2	5.50F	107472	6.50-16 6 PR FARMAX R1 TT	FARMAX R1	83 A8
3	6	114268	7.00-18 6 PR FARMAX R1 TT	FARMAX R1	91 A8
4	5.50F	107471	7.50-16 6 PR FARMAX R1 TT	FARMAX R1	88 A8
5	5.50F	113554	7.50-16 8 PR FARMAX R1 TT	FARMAX R1	99 A8
6	6.00F	113878	7.50-20 8 PR FARMAX R1 TT	FARMAX R1	103 A8
7	5JA	114565	7.00-12 6 PR FARMAX R1 TL	FARMAX R1	83 A8
8	5JA	107814	7.00-12 10 PR FARMAX R1 TL	FARMAX R1	87 A6
9	6.00F	113879	8.00-20 8 PR FARMAX R1 TT	FARMAX R1	111 A6
10	6.00F	107470	8.25-16 6 PR FARMAX R1 TT	FARMAX R1	94 A8
11	W7	102898	8.3-24 8 PR FARMAX R1 TT / TL	FARMAX R1	105 A8
12	W6	107798	8.00-16 8 PR FARMAX R1 TT	FARMAX R1	94 A8
13	W8	113077	9.5-16 8 PR FARMAX R1 TL	FARMAX R1	100 A8
14	W8	107812	9.5-16 12 PR FARMAX R1 TL	FARMAX R1	106 A8
15	W8	112776	9.5-20 8 PR FARMAX R1 TT	FARMAX R1	107 A8
16	W8	102899	9.5-24 8 PR FARMAX R1 TT / TL	FARMAX R1	112 A8
17	W8	106443	9.5-22 8 PR FARMAX R1 TT	FARMAX R1	106 A8
18	W10	102900	11.2-24 8 PR FARMAX R1 TT / TL	FARMAX R1	116 A8
19	W10	106532	11.2-24 10 PR FARMAX R1 TT / TL	FARMAX R1	120 A8
20	W10	102703	11.2-28 8 PR FARMAX R1 TT / TL	FARMAX R1	118 A8
21	W10	113967	11.2-28 10 PR FARMAX R1 TT / TL	FARMAX R1	122 A8
22	10LB	107813	12.4-16 6 PR FARMAX R1 TT	FARMAX R1	101 A8
23	W11	102698	12.4-24 8 PR FARMAX R1 TT / TL	FARMAX R1	121 A8
24	W11	112943	12.4-24 10 PR FARMAX R1 TT	FARMAX R1	125 A8
25	W11	107304	12.4-24 12 PR FARMAX R1 TT	FARMAX R1	129 A8
26	W11	112925	12.4-28 4 PR FARMAX R1 TL	FARMAX R1	104 A8
27	W11	102901	12.4-28 8 PR FARMAX R1 TT / TL	FARMAX R1	123 A8
28	W11	112774	12.4-32 8 PR FARMAX R1 TT	FARMAX R1	121 A8
29	W11	107287	12.4-36 8 PR FARMAX R1 TT / TL	FARMAX R1	126 A8
30	W11	106444	12.4-36 12 PR FARMAX R1 TT / TL	FARMAX R1	135 A8
31	W11	112775	12.4-38 8 PR FARMAX R1 TT	FARMAX R1	124 A8
32	W11	112927	12.4-38 14 PR FARMAX R1 TT	FARMAX R1	135 A8
33	W12	103383	13.6-24 8 PR FARMAX R1 TT / TL	FARMAX R1	122 A8
34	W12	113965	13.6-24 10 PR FARMAX R1 TT / TL	FARMAX R1	128 A8
35	W12	102902	13.6-28 8 PR FARMAX R1 TT	FARMAX R1	125 A8
36	W12	107269	13.6-28 12 PR FARMAX R1 TT / TL	FARMAX R1	134 A8
37	W12	102706	13.6-36 8 PR FARMAX R1 TT / TL	FARMAX R1	129 A8
38	W12	102697	13.6-38 8 PR FARMAX R1 TT / TL	FARMAX R1	131 A8
39	W12	113968	13.6-38 10 PR FARMAX R1 TT / TL	FARMAX R1	136 A8
40	W12	113540	13.6-38 14 PR FARMAX R1 TT / TL	FARMAX R1	139 A8
41	W13	102691	14.9-24 8 PR FARMAX R1 TT	FARMAX R1	128 A8
42	W13	107307	14.9-24 12 PR FARMAX R1 TT	FARMAX R1	132 A8
43	W13	107810	14.9-26 8 PR FARMAX R1 TL	FARMAX R1	125 A8
44	W13	112748	14.9-26 12 PR FARMAX R1 TL	FARMAX R1	132 A8
45	W13	113536	14.9-28 8 PR FARMAX R1 TT	FARMAX R1	130 A8
46	W13	107317	14.9-28 12 PR FARMAX R1 TT / TL	FARMAX R1	138 A8
47	W13	113966	14.9-28 10 PR FARMAX R1 TT	FARMAX R1	134 A8
48	W13	107477	14.9-30 8 PR FARMAX R1 TT	FARMAX R1	132 A8
49	W14	102694	15.5-38 8 PR FARMAX R1 TT / TL	FARMAX R1	133 A8
50	W14	103004	15.5-38 10 PR FARMAX R1 TT	FARMAX R1	137 A8
51	W14	107273	15.5-38 12 PR FARMAX R1 TT	FARMAX R1	141 A8

SKU CODE INDEX

BIAS						
SL No.	RIM SIZE	SKU CODE	SIZE	PATTERN	LI/SS	
52	W15L	102704	16.9-24 8 PR FARMAX R1 TT / TL	FARMAX R1	133 A8	
53	W15L	112781	16.9-26 8 PR FARMAX R1 TT	FARMAX R1	130 A8	
54	W15L	106775	16.9-28 8 PR FARMAX R1 TT	FARMAX R1	135 A8	
55	W15L	102700	16.9-28 12 PR FARMAX R1 TT / TL	FARMAX R1	143 A8	
56	W15L	112926	16.9-30 6 PR FARMAX R1 TT	FARMAX R1	126 A8	
57	W15L	106588	16.9-30 8 PR FARMAX R1 TT	FARMAX R1	137 A8	
58	W15L	113537	16.9-30 10 PR FARMAX R1 TT	FARMAX R1	140 A8	
59	W15L	107271	16.9-30 12 PR FARMAX R1 TT / TL	FARMAX R1	144 A8	
60	W15L	106488	16.9-34 8 PR FARMAX R1 TT / TL	FARMAX R1	139 A8	
61	W15L	107465	16.9-34 10 PR FARMAX R1 TT	FARMAX R1	142 A8	
62	W15L	107322	16.9-34 14 PR FARMAX R1 TT	FARMAX R1	149 A8	
63	W15L	102705	16.9-38 8 PR FARMAX R1 TT	FARMAX R1	141 A8	
64	W15L	103006	16.9-38 10 PR FARMAX R1 TT	FARMAX R1	143 A8	
65	W15L	107274	16.9-38 12 PR FARMAX R1 TT / TL	FARMAX R1	146 A8	
66	W16L	102692	18.4-26 12 PR FARMAX R1 TT / TL	FARMAX R1	146 A8	
67	W16L	107279	18.4-30 8 PR FARMAX R1 TT / TL	FARMAX R1	139 A8	
68	W16L	102693	18.4-30 12 PR FARMAX R1 TT	FARMAX R1	149 A8	
69	W16L	113534	18.4-30 14 PR FARMAX R1 TT	FARMAX R1	151 A8	
70	W16L	103008	18.4-34 8 PR FARMAX R1 TT	FARMAX R1	142 A8	
71	W16L	102702	18.4-34 12 PR FARMAX R1 TT	FARMAX R1	150 A8	
72	W16L	107309	18.4-34 10 PR FARMAX R1 TT	FARMAX R1	146 A8	
73	W16L	107283	18.4-34 14 PR FARMAX R1 TT / TL	FARMAX R1	153 A8	
74	W16L	103009	18.4-38 8 PR FARMAX R1 TT / TL	FARMAX R1	143 A8	
75	W16L	113533	18.4-38 12 PR FARMAX R1 TT	FARMAX R1	152 A8	
76	W18	107700	20.8-38 10 PR FARMAX R1 TT	FARMAX R1	152 A6/148 A8	
77	W18	107776	20.8-38 14 PR FARMAX R1 TL	FARMAX R1	159 A6/155 A8	
78	DW 20	105298	23.1-26 16 PR FARMAX R1 TL	FARMAX R1	159 A8	
79	DW 20	114355	23.1-26 18 PR FARMAX R1 TL	FARMAX R1	162 A8	
80	DW20B	112780	23.1-30 12 PR FARMAX R1 TL	FARMAX R1	151 A8	
81	DW21B	114082	24.5-32 12 PR FARMAX R1 TL	FARMAX R1	156 A8	
82	W13	113110	14.9-24 6 PR FARMAX R2 TT	FARMAX R2	119 A8/123 A6	
83	W13	114068	14.9-24 8 PR FARMAX R2 TT	FARMAX R2	124 A8/128 A6	
84	W13	113112	14.9-28 8 PR FARMAX R2 TT	FARMAX R2	126 A8/130 A6	
85	W13	113111	14.9-28 10 PR FARMAX R2 TT	FARMAX R2	130 A8/134 A6	
86	DW16	113113	18.4-26 10 PR FARMAX R2 TT	FARMAX R2	138 A8/142 A6	
87	DW18	113116	20.8-38 10 PR FARMAX R2 TT	FARMAX R2	148 A8/151 A6	
88	DW20	113117	23.1-26 10 PR FARMAX R2 TT	FARMAX R2	145 A8/149 A6	
89	DW20	113118	23.1-30 10 PR FARMAX R2 TT	FARMAX R2	147 A8/151 A6	
90	3.00D	102887	4.00-19 4 PR FARMAX F2 TT	FARMAX F2	72 A6	
91	4.00E	102881	5.00-15 4 PR FARMAX F2 TT	FARMAX F2	73 A6	
92	4.00E	102882	5.50-16 6 PR FARMAX F2 TT	FARMAX F2	86 A6	
93	4.50E	102883	6.00-16 6 PR FARMAX F2 TT	FARMAX F2	88 A6	
94	4.50E	102884	6.5-16 6 PR FARMAX F2 TT	FARMAX F2	91 A6	
95	5.50F	102885	7.50-16 8 PR FARMAX F2 TT	FARMAX F2	103 A6	
96	5.50F	114583	7.50-16 12 PR FARMAX F2 TT	FARMAX F2	113 A6	
97	5.50F	102886	7.50-18 8 PR FARMAX F2 TT	FARMAX F2	106 A6	
98	5.50F	102888	7.50-20 8 PR FARMAX F2 TT	FARMAX F2	108 A6	
99	6.50F	114671	9.00-16 10 PR FARMAX F2 TT	FARMAX F2	116 A6	
100	W8	107464	10.00-16 8 PR FARMAX F2 TT	FARMAX F2	115 A6	
101	W8	107627	10.00-16 10 PR FARMAX F2 TT	FARMAX F2	119/A6	
102	W10	102696	11.00-16 8 PR FARMAX F2 TT	FARMAX F2	118 A6	

SKU CODE INDEX

BIAS						
SL No.	RIM SIZE	SKU CODE	SIZE	PATTERN	LI/SS	
103	W10	107466	11.00-16 12 PR FARMAX F2 TT	FARMAX F2	118 A6	
104	4.00E	107545	5.50-16 6 PR FARMAX X3 TT	FARMAX X3	86 A6	
105	4.50E	107544	6.00-16 6 PR FARMAX X3 TT	FARMAX X3	88 A6	
106	4.5E	107713	6.50-16 8 PR FARMAX X3 TT	FARMAX X3	98 A6	
107	5.00F	107589	6.50-20 8 PR FARMAX X3 TT	FARMAX X3	102 A6	
108	5.5F	107588	7.50-16 8 PR FARMAX X3 TT	FARMAX X3	103 A6	
109	5.5F	107732	7.50-20 8 PR FARMAX X3 TT	FARMAX X3	109 A6	
110	7	103521	9.5L-15SL 8 PR FARMAX M TL	FARMAX F2M	102 A8	
111	8LB	103523	10.00-16SL 8 PR FARMAX M TL	FARMAX F2M	110 A8	
112	10LB	107463	11.00-16SL 8 PR FARMAX M TL	FARMAX F2M	114 A8	
113	W16L	107687	18.4-26 10 PR FARMAX R1 HD TT	FARMAX R1 HD	144 A8	
114	W16L	107689	18.4-38 12 PR FARMAX R1 HD TT	FARMAX R1 HD	154 A8	
115	DW20	107688	23.1-26 12 PR FARMAX R1 HD TL	FARMAX R1 HD	155 A8	
116	DW21B	113081	24.5-32 12 PR YIELDMAX 23 DEG TT	YIELDMAX 23°	156 A8	
117	DW25A	113082	28L-26 12 PR YIELDMAX 23 DEG TT	YIELDMAX 23°	150 A8	
118	DW27A	113083	30.5L-32 14 PR YIELDMAX 23 DEG TT	YIELDMAX 23°	160A8	
119	5J	107373	6.5/80-12 6 PR FARMAX AS TT	FARMAX AS	93 A8	
120	9	107800	10.0/75-15.3 10 PR FARMAX AS TL	FARMAX AS	111 A8	
121	9	113102	10.0/75-15.3 14 PR FARMAX AS TL	FARMAX AS	118 A8	
122	9	113771	11.5/80-15.3 10 PR FARMAX AS TL	FARMAX AS	119 A8	
123	9	107801	11.5/80-15.3 12 PR FARMAX AS TL	FARMAX AS	123 A8	
124	9	113773	11.5/80-15.3 14 PR FARMAX AS TL	FARMAX AS	126 A8	
125	8.5 JA	113885	23X10.50-12 12 PR FARMAX AS TL	FARMAX AS	117 A8/105A8	
126	10.5JA	113886	26X12.00-12 8 PR FARMAX AS TL	FARMAX AS	113 A8/100A8	
127	AG13.00	113560	400/60-15.5 16 PR FARM IMPLEMENT AWI 305 TL	FARM IMPLEMENT AWI 305	147 A8	
128	AG13.00	113563	400/60-15.5 14 PR FARM IMPLEMENT AWI 305 TL	FARM IMPLEMENT AWI 305	145 A8	
129	4.25	112770	7.00-12 6 PR FARM IMPLEMENT AWI 305 TL	FARM IMPLEMENT AWI 305	95 A8	
130	9	112754	10.0/75-15.3 18 PR FARM IMPLEMENT AWI 305 TL	FARM IMPLEMENT AWI 305	135 A8	
131	9	107278	10.0/75-15.3 12 PR FARM IMPLEMENT AWI 305 TL	FARM IMPLEMENT AWI 305	126 A8	
132	9	107297	10.0/75-15.3 14 PR FARM IMPLEMENT AWI 305 TL	FARM IMPLEMENT AWI 305	130 A8	
133	9	107277	10.0/75-15.3 10 PR FARM IMPLEMENT AWI 305 TL	FARM IMPLEMENT AWI 305	123 A8	
134	9	112771	10.0/80-12 8 PR FARM IMPLEMENT AWI 305 TL	FARM IMPLEMENT AWI 305	116 A8	
135	8.5	112772	10.0/80-12 10 PR FARM IMPLEMENT AWI 305 TL	FARM IMPLEMENT AWI 305	121 A8	
136	W9	113883	10.5/65-16 14 PR FARM IMPLEMENT AWI 305 TL	FARM IMPLEMENT AWI 305	130 A8	
137	9	107293	11.5/80-15.3 12 PR FARM IMPLEMENT AWI 305 TL	FARM IMPLEMENT AWI 305	135 A8	
138	9	107292	11.5/80-15.3 14 PR FARM IMPLEMENT AWI 305 TL	FARM IMPLEMENT AWI 305	139 A8	
139	9	107294	11.5/80-15.3 16 PR FARM IMPLEMENT AWI 305 TL	FARM IMPLEMENT AWI 305	141 A8	
140	9	107291	11.5/80-15.3 10 PR FARM IMPLEMENT AWI 305 TL	FARM IMPLEMENT AWI 305	131 A8	
141	9	106266	12.5/80-15.3 12 PR FARM IMPLEMENT AWI 305 TL	FARM IMPLEMENT AWI 305	140 A8	

SKU CODE INDEX

BIAS						
SL No.	RIM SIZE	SKU CODE	SIZE	PATTERN	LI/SS	
142	11	107790	12.5/80-18 18 PR FARM IMPLEMENT AWI 305 TL	FARM IMPLEMENT AWI 305	151 A8	
143	11	107683	12.5/80-18 14 PR FARM IMPLEMENT AWI 305 TL	FARM IMPLEMENT AWI 305	145 A8	
144	11	107682	12.5/80-18 16 PR FARM IMPLEMENT AWI 305 TL	FARM IMPLEMENT AWI 305	148 A8	
145	11	107684	12.5/80-18 12 PR FARM IMPLEMENT AWI 305 TL	FARM IMPLEMENT AWI 305	142 A8	
146	W11	107680	13.0/55-16 12 PR FARM IMPLEMENT AWI 305 TL	FARM IMPLEMENT AWI 305	130 A8	
147	W11	107679	13.0/55-16 14 PR FARM IMPLEMENT AWI 305 TL	FARM IMPLEMENT AWI 305	133 A8	
148	W11	112755	13.0/55-16 18 PR FARM IMPLEMENT AWI 305 TL	FARM IMPLEMENT AWI 305	138 A8	
149	11	107681	13.0/65-18 16 PR FARM IMPLEMENT AWI 305 TL	FARM IMPLEMENT AWI 305	144 A8	
150	16.00DC	107285	500/50-17 10PR FARM IMPLEMENT 404 TL	FARM IMPLEMENT 404	143 A8	
151	16.00DC	105430	500/50-17 14 PR FARM IMPLEMENT 404 TL	FARM IMPLEMENT 404	152 A8	
152	11	107677	14.0/65-16 10PR FARM IMPLEMENT 404 TL	FARM IMPLEMENT 404	134 A8	
153	11	107676	14.0/65-16 14 PR FARM IMPLEMENT 404 TL	FARM IMPLEMENT 404	142 A8	
154	13	107467	15.0/55-17 10PR FARM IMPLEMENT 404 TL	FARM IMPLEMENT 404	134 A8	
155	13	105429	15.0/55-17 14 PR FARM IMPLEMENT 404 TL	FARM IMPLEMENT 404	141 A8	
156	13	107791	15.0/55-17 18 PR FARM IMPLEMENT 404 TL	FARM IMPLEMENT 404	146A8	
157	13	114262	15.0/55-17 26 PR FARM IMPLEMENT 404 TL	FARM IMPLEMENT 404	155 A8/159 A6	
158	13	107804	15.0/70-18 16 PR FARM IMPLEMENT 404 TL	FARM IMPLEMENT 404	151 A8	
159	6.75	114263	200/60-14.5 IMP 14 PR FARM IMPLEMENT I-1 TL	FARM IMPLEMENT I-1	113 A8	
160	8	114264	250/65-14.5 IMP 14 PR FARM IMPLEMENT I-1 TL	FARM IMPLEMENT I-1	124 A8	
161	5.5	107672	7.60-15 SL 8 PR FARM IMPLEMENT I-1 TL	FARM IMPLEMENT I-1	0	
162	5.5	105234	7.60-15 SL 10 PR FARM IMPLEMENT I-1 TL	FARM IMPLEMENT I-1	0	
163	7	112773	9.5L-14 8 PR FARM IMPLEMENT I-1 TL	FARM IMPLEMENT I-1	0	
164	7	101145	9.5L-15 SL 8 PR FARM IMPLEMENT I-1 TL	FARM IMPLEMENT I-1	0	
165	7	102890	9.5L-15 SL 12 PR FARM IMPLEMENT I-1 TL	FARM IMPLEMENT I-1	0	
166	8 LB	101147	11L-15 SL 8 PR FARM IMPLEMENT I-1 TL	FARM IMPLEMENT I-1	0	
167	8 LB	102894	11L-15 SL 12 PR FARM IMPLEMENT I-1 TL	FARM IMPLEMENT I-1	0	
168	10 LB	102895	12.5-15 SL 10 PR FARM IMPLEMENT I-1 TL	FARM IMPLEMENT I-1	0	
169	10 LB	113100	13.50-15 IMP 8 PR FARM IMPLEMENT I-1 TL	FARM IMPLEMENT I-1	Load Range D	
170	10 LB	113218	13.50-15 IMP 12 PR FARM IMPLEMENT I-1 TL	FARM IMPLEMENT I-1	Load Range F	
171	W14C	113115	16.5L-16.1 14 PR FARM IMPLEMENT LP TL	FARM IMPLEMENT LP	0	
172	W14C	113114	16.5L-16.1 10 PR FARM IMPLEMENT LP TL	FARM IMPLEMENT LP	0	
173	8LB	113547	9.5L-15FI 0 HIGHWAY IMPLEMENT T422 TL	HIGHWAY IMPLEMENT T422	D	
174	8LB	113548	11L-15FI 0 HIGHWAY IMPLEMENT T422 TL	HIGHWAY IMPLEMENT T422	F	
175	10LB	113549	12.5L-15FI 0 HIGHWAY IMPLEMENT T422 TL	HIGHWAY IMPLEMENT T422	F	
176	16.00 DC	107468	480/45-17 10 PR FLOTATION PLUS TT	FLOTATION PLUS	138 A8	
177	16.00 DC	107319	480/45-17 14 PR FLOTATION PLUS TL	FLOTATION PLUS	144 A8 131 A8	
178	16.00 DC	103274	480/45-17 16 PR FLOTATION PLUS TL	FLOTATION PLUS	146 A8 134 A8	
179	16.00 DC	107792	480/45-17 18 PR FLOTATION PLUS TL	FLOTATION PLUS	148 A8 136 A8	
180	16.00 DC	101775	500/50-17 14 PR FLOTATION PLUS TL	FLOTATION PLUS	149 A8 137 A8	

SKU CODE INDEX

BIAS					
SL No.	RIM SIZE	SKU CODE	SIZE	PATTERN	LI/SS
181	AG16.00	113741	560/60-22.5 16 PR FLOTATION PLUS TL	FLOTATION PLUS	167 A8 155 A8
182	AG20.00	113742	600/55-22.5 16 PR FLOTATION PLUS TL	FLOTATION PLUS	165 A8 153 A8
183	AG24.00	113743	700/50-22.5 16 PR FLOTATION PLUS TL	FLOTATION PLUS	174 A8 162 A8
184	AG11.75	114747	400/55-17.5 18 PR FLOTATION T422 TL	FLOTATION T422	152 A8 148 B 139 A8 135 B
185	16.00DC	103953	500/50-17 16 PR FLOTATION T422 TL	FLOTATION T422	152 A8 149 B 140 A8 136 B
186	16.00DC	105129	500/50-17 18 PR FLOTATION T422 TL	FLOTATION T422	157 A8 153 B 145 A8 141 B
187	AG16.00	113672	500/50-22.5 16 PR FLOTATION T422 TL	FLOTATION T422	158 A8 155 B 146 A8 142 B
188	16.00DC	103479	500/60-22.5 16 PR FLOTATION T422 TL	FLOTATION T422	163 A8 159 B 151 A8 148 B
189	16.00 DC	102833	550/45-22.5 16 PR FLOTATION T422 TL	FLOTATION T422	159 A8 156 B 147 A8 143 B
190	16.00 DC	103141	550/45-22.5 20 PR FLOTATION T422 TL	FLOTATION T422	166 A8 162 B 154 A8 150 B
191	16.00 DC	102836	550/60-22.5 16 PR FLOTATION T422 TL	FLOTATION T422	168 A8 163 B 155 A8 151 B
192	16.00 DC	107469	550/60-22.5 20 PR FLOTATION T422 TL	FLOTATION T422	171 A8 167 B 158 A8 154 B
193	20.00DC	102417	600/50-22.5 16 PR FLOTATION T422 TL	FLOTATION T422	165 A8 161 B 153 A8 149 B
194	20.00DC	103177	600/55-22.5 16 PR FLOTATION T422 TL	FLOTATION T422	169 A8 166 B 156 A8 153 B
195	24.00DC	103176	700/40-22.5 16 PR FLOTATION T422 TL	FLOTATION T422	166 A8 162 B 154 A8 150 B
196	24.00DC	113894	700/40-22.5 18 PR FLOTATION T422 TL	FLOTATION T422	173 A8 169 B 160 A8 156 B
197	24.00DC	103175	700/50-22.5 16 PR FLOTATION T422 TL	FLOTATION T422	174 A8 170 B 162 A8 158 B
198	24.00DC	103181	700/50-26.5 16 PR FLOTATION T422 TL	FLOTATION T422	174 A8 170 B 162 A8 158 B
199	28.00DC	105804	800/45-26.5 12 PR FLOTATION T422 TL	FLOTATION T422	170 A8 167 B 158 A8 155 B
200	28.00DC	102841	800/45-26.5 16 PR FLOTATION T422 TL	FLOTATION T422	177 A8 173 B 164 A8 160 B
201	13.00DC	107281	400/55-22.5 12 PR T422 VALUE PRO TL	T422 VALUE PRO	146 A8 143 B 134 A8 130 B
202	13.00DC	103951	400/55-22.5 16 PR T422 VALUE PRO TL	T422 VALUE PRO	152 A8 149 B 140 A8 136 B
203	13.00DC	107321	400/55-22.5 18 PR T422 VALUE PRO TL	T422 VALUE PRO	156 A8 153 B 144 A8 140 B
204	13.00DC	114497	400/55-22.5 20 PR T422 VALUE PRO TL	T422 VALUE PRO	159 A8 155 B 147 A8 143 B
205	13	106587	400/60-15.5 16 PR T422 VALUE PRO TT	T422 VALUE PRO	148 A8 136 A8
206	14	107282	500/45-22.5 12 PR T422 VALUE PRO TT	T422 VALUE PRO	148 A8 144 B 136 A8 132 B
207	14	103952	500/45-22.5 16 PR T422 VALUE PRO TL	T422 VALUE PRO	154 A8 150 B 142 A8 138 B
208	16.00DC	103603	500/60-22.5 16 PR T422 VALUE PRO TL	T422 VALUE PRO	163 A8 159 B 151 A8 148 B

SKU CODE INDEX

BIAS					
SL No.	RIM SIZE	SKU CODE	SIZE	PATTERN	LI/SS
209	16.00DC	103604	550/45-22.5 16 PR T422 VALUE PRO TL	T422 VALUE PRO	159 A8 156 B 147 A8 143 B
210	16.00DC	103602	550/60-22.5 16 PR T422 VALUE PRO TL	T422 VALUE PRO	168 A8 163 B 155 A8 151 B
211	16.00DC	104862	500/60-22.5 16 PR FLOTATION TX440 TL	FLOTATION TX440	163 A8 159 B 151 A8 148 B
212	16.00DC	104840	550/60-22.5 16 PR FLOTATION TX440 TL	FLOTATION TX440	166 A8 162 B 154 A8 150 B
213	20.00DC	104861	600/50-22.5 16 PR FLOTATION TX440 TL	FLOTATION TX440	165 A8 161 B 153 A8 149 B
214	20.00DC	112928	600/50-22.5 18 PR FLOTATION TX440 TL	FLOTATION TX440	170 A8 166 B 158 A8 154 B
215	24.00DC	104863	700/40-22.5 16 PR FLOTATION TX440 TL	FLOTATION TX440	166 A8 162 B 154 A8 150 B
216	24.00DC	112929	700/40-22.5 18 PR FLOTATION TX440 TL	FLOTATION TX440	174 A8 170 B 162 A8 158 B
217	13	102835	400/60-15.5 14 PR TR800 TL	TR800	145 A8 132 A8
218	13	105128	400/60-15.5 18 PR TR800 TL	TR800	149 A8 137 A8
219	W10	100043	11.2-24 4 PR IRROGATOR TT	IRROGATOR	101
220	W10	107674	11.2-24 6 PR IRROGATOR TL	IRROGATOR	110
221	W10	103582	11.2-38 6 PR IRROGATOR TT / TL	IRROGATOR	117
222	W13	106589	14.9-24 6 PR IRROGATOR TL	IRROGATOR	119 A8
223	W13	103584	14.9-24 8 PR IRROGATOR TT	IRROGATOR	123
224	W12	107818	13.6-16 4 PR TURF XL TL	TURF XL	96 A8
225	7.00 I - 55; I - 70	113550	18X8.50-10 4 PR TURF XL TL	TURF XL	74 A2
226	7	113315	22X9.50-12 2 PR TURF XL TL	TURF XL	77 A2
227	8.5	113551	23X10.5-12 8 PR TURF XL TL	TURF XL	113 A2
228	7	114265	23X8.5-12 4 PR TURF XL TL	TURF XL	91 A2
229	7	114266	23X8.5-12 6 PR TURF XL TL	TURF XL	100 A2
230	7JA	107816	24X8.5-14 4 PR TURF XL TL	TURF XL	94A2
231	7JA	107817	25X8.5-14 6 PR TURF XL TL	TURF XL	107 A2
232	10.50 I - 55; I - 70	113561	26x12.00-12 4 PR TURF XL TL	TURF XL	106 A2
233	10.50 I - 55; I - 70	113552	26x12.00-12 8 PR TURF XL TL	TURF XL	123 A2
234	10.50 I - 55; I - 70	113562	26x12.00-12 10 PR TURF XL TL	TURF XL	127 A2
235	10.50 I - 55; I - 70	113553	26x12.00-12 12 PR TURF XL TL	TURF XL	131 A2
236	W11	107815	38X14-20 4 PR TURF XL TL	TURF XL	110 B
237	DW20	113770	23.1-26 16 PR LOGGER XL 0	LOGGER XL	160 A6
238	DW21A	113912	24.5-32 20 PR LOGGER XL 0	LOGGER XL	169 A6
239	DW25B	113835	28L-26 20 PR LOGGER XL 0	LOGGER XL	165 A6
240	DW27A	113913	30.5L-32 26 PR LOGGER XL 0	LOGGER XL	176 A6
241	DH31	113916	35.5L-32 26 PR LOGGER XL 0	LOGGER XL	183 A6
242	AG24.00	113791	710/45-26.5 20 PR FOREST XL TL	FOREST XL	168 A8
243	AG24.00	114363	710/45-26.5 24 PR FOREST XL TL	FOREST XL	173 A8
244	8.25	106261	10 - 16.5 HD 10 PR GM LOADER HD TL	GM LOADER HD	121 A8
245	9.75	106262	12- 16.5 HD 12 PR GM LOADER HD TL	GM LOADER HD	129 A8
246	9.75	107023	12- 16.5 HD 14 PR GM LOADER HD TL	GM LOADER HD	132 A8
247	8LB	114690	27x10.5-15 8 PR GM LOADER HD TL	GM LOADER HD	105 A8

SKU CODE INDEX

BIAS						
SL No.	RIM SIZE	SKU CODE	SIZE	PATTERN	LI/SS	
248	8.25	104855	10-16.5 10 PR GRIP X HD TL	GRIP X HD	0	
249	8.25	106263	10-16.5 12 PR GRIP X HD TL	GRIP X HD	0	
250	9.75	104856	12-16.5 12 PR GRIP X HD TL	GRIP X HD	0	
251	9.75	105131	12-16.5 14 PR GRIP X HD TL	GRIP X HD	0	
252	9.75	114059	12-16.5 12 PR GRIP XL 5 TL	GRIP XL 5	LI/SS	
253	8.25	113880	10-16.5 10 PR GRIP XL 5 TL	GRIP XL 5	145 A2	
254	10.5	105378	14-17.5 14 PR LOADER PRO HD TL	LOADER PRO HD	135 A2	
255	11.75	107797	15-19.5 6 PR LOADER PRO HD TL	LOADER PRO HD	0	
256	11.75	105379	15-19.5 14 PR LOADER PRO HD TL	LOADER PRO HD	0	
257	14	106141	18-19.5 16 PR MPT 503 TL	MPT 503	160 A8	
258	14	107022	18-19.5 18 PR MPT 503 TL	MPT 503	167 A8	
259	14	106142	18-22.5 16 PR MPT 503 TL	MPT 503	163 A8	
260	7.5	105805	10.00-20 16 PR MPT 602 TL	MPT 602	146 B	
261	11	105806	12.5-18 12 PR MPT 602 TL	MPT 602	134 D	
262	11	107580	12.5-18 16 PR MPT 602 TL	MPT 602	144 D	
263	11	105807	12.5-20 12 PR MPT 602 TL	MPT 602	135 D	
264	13	101638	405/70-20 (16.0/70-20) 14 PR MPT 602 TL	MPT 602	149 B	
265	13	106241	405/70-20 (16.0/70-20) 18 PR MPT 602 TL	MPT 602	165B	
266	13	113233	405/70-20 (16.0/70-20) 20 PR MPT 602 TL	MPT 602	170B	
267	13	101639	405/70-24 (16.0/70-24) 14 PR MPT 602 TL	MPT 602	151D	
268	13	107289	405/70-24 (16.0/70-24) 16 PR MPT 602 TL	MPT 602	156B	
269	13	105402	405/70-20 (16.0/70-20) 14 PR MPT 800 TL	MPT 800	149 B	
270	13	105401	405/70-24 (16.0/70-24) 14 PR MPT 800 TL	MPT 800	152 B	
271	13	107288	405/70-24 (16.0/70-24) 16 PR MPT 800 TL	MPT 800	156 B	
272	13	113673	405/70-20 IND 18 PR MPT 808 TL	MPT 808	165 B	
273	9	107485	10.0/75-15.3 14 PR MPT 808 TL	MPT 808	"130 A8 118 A8"	
274	9	112777	10.5-18 12 PR MPT 808 TL	MPT 808	134 B	
275	9	107480	10.5-20 12 PR MPT 808 TL	MPT 808	135 B	
276	9	107484	11.5/80-15.3 14 PR MPT 808 TL	MPT 808	"139 A8 126 A8"	
277	W9	107483	12.0/75-18 / (300/75-18) 12 PR MPT 808 TL	MPT 808	"139 A8 126 A8"	
278	W9	107482	12.0-18 12 PR MPT 808 TL	MPT 808	145 A6	
279	11	107481	12.5-18 12 PR MPT 808 TL	MPT 808	135 B	
280	11	107479	12.5-20 12 PR MPT 808 TL	MPT 808	140 B	
281	11	107478	14.5-20 14 PR MPT 808 TL	MPT 808	143 B	
282	11	112778	18-19.5 18 PR MPT 808 TL	MPT 808	165 B	
283	9	107498	12.5/80-18 10 PR TYROCK TL	TYROCK	126 A8	
284	9	104961	12.5/80-18 12 PR TYROCK TL	TYROCK	129 A8	
285	9	107320	12.5/80-18 14 PR TYROCK TL	TYROCK	132 A8	
286	9	113235	12.5/80-18 18 PR TYROCK TL	TYROCK	138 A8	
287	W16L	105377	18.4-26 12 PR TYROCK TL	TYROCK	156 A8	
288	W16L	107318	18.4-26 14 PR TYROCK TL	TYROCK	159 A8	
289	W16L	107342	18.4-26 16 PR TYROCK TL	TYROCK	156 A8	
290	W15L	107286	16.9-28 8 PR TYROCK SUPER TT	TYROCK SUPER	145 A8	
291	W15L	106949	16.9-28 12 PR TYROCK SUPER TT	TYROCK SUPER	152 A8	
292	W15L	107323	16.9-28 14 PR TYROCK SUPER TT	TYROCK SUPER	155 A8	
293	W15L	106950	16.9-30 14 PR TYROCK SUPER TT	TYROCK SUPER	156 A8	
294	W9X18	107811	10.5/80-18 8 PR TYROCK SUPER X3 TL	TYROCK SUPER X3	125 A8	
295	10LBX16	107780	12.4-16 4 PR TYROCK SUPER X3 TL	TYROCK SUPER X3	106 A8	

SKU CODE INDEX

BIAS					
SL No.	RIM SIZE	SKU CODE	SIZE	PATTERN	LI/SS
296	11.75X 19.5	112779	15-19.5 6 PR TYROCK SUPER X3 TL	TYROCK SUPER X3	144 A2
297	W15L	107549	17.5L-24 8 PR TYROCK SUPER X3 TT	TYROCK SUPER X3	139 A8
298	W15L	107550	17.5L-24 12 PR TYROCK SUPER X3 TT	TYROCK SUPER X3	146 A8
299	W16L	107552	18.4-24 12 PR TYROCK SUPER X3 TT	TYROCK SUPER X3	155 A8
300	DW 16 L	113316	18.4-28 12 PR TYROCK SUPER X3 TL	TYROCK SUPER X3	157 A8
301	7.00 I - 55 ; I - 70 X 10	113555	18X8.50-10 4 PR TYROCK SUPER X3 TL	TYROCK SUPER X3	74 A2
302	DW 16 L	112782	19.5L-24 12 PR TYROCK SUPER X3 TL	TYROCK SUPER X3	151 A8
303	7.00 x 12	114267	23x8.50-12 12 PR TYROCK SUPER X3 TL	TYROCK SUPER X3	113 A2
304	7JA X14	107781	23X8.5-14 4 PR TYROCK SUPER X3 TL	TYROCK SUPER X3	94 A2
305	10.50 I - 55 ; I - 70	113556	26x12-12 4 PR TYROCK SUPER X3 TL	TYROCK SUPER X3	100 A2
306	7JA X145	107779	27X8.5-15 6 PR TYROCK SUPER X3 TL	TYROCK SUPER X3	112 A2
307	12	114670	33X15.5-16.5 12 PR TYROCK SUPER X3 TL	TYROCK SUPER X3	148 A8
308	W13	107546	400/70-20 16 PR TYROCK SUPER X3 TT	TYROCK SUPER X3	144 A8
309	W14Lx20	113314	43X16.00-20 4 PR TYROCK SUPER X3 TL	TYROCK SUPER X3	133 A2
310	W15L	107547	"440/80-24 (16.9-24) 8 PR TYROCK SUPER X3 TL"	TYROCK SUPER X3	142 A8
311	W15L	107548	"440/80-24 (16.9-24) 12 PR TYROCK SUPER X3 TL"	TYROCK SUPER X3	149 A8
312	W15L	113541	"440/80-24 (16.9-24) 18 PR TYROCK SUPER X3 TL"	TYROCK SUPER X3	162 A8
313	6.5	107809	8.25-20 14 PR GRIP MASTER EX TT	GRIP MASTER EX	139 B
314	7	107675	9.00-20 14 PR GRIP MASTER EX TT	GRIP MASTER EX	140 B
315	7.5	107808	10.00-20 16 PR GRIP MASTER EX TT	GRIP MASTER EX	146 B
316	8	107807	11.00-20 16 PR GRIP MASTER EX TT	GRIP MASTER EX	152 B
317	8	100816	13.00-24 12 PR GRADER XL TL	GRADER XL	0
318	8	106485	13.00-24 16 PR GRADER XL TL	GRADER XL	0
319	8	100824	14.00-24 12 PR GRADER XL TL	GRADER XL	0
320	8	100826	14.00-24 16 PR GRADER XL TL	GRADER XL	0
321	14	100828	17.5-25 12 PR GRADER XL TL	GRADER XL	0
322	14	100831	17.5-25 16 PR GRADER XL TL	GRADER XL	0
323	14	113237	17.5-25 24 PR GRADER XL TL	GRADER XL	0
324	8	104506	13.00-24 12 PR GRADER XL PLUS TT	GRADER XL PLUS	0
325	8	105132	13.00-24 16 PR GRADER XL PLUS TT	GRADER XL PLUS	0
326	10.00VA	103782	14.00-24 16 PR GRIP MASTER ND TT	GRIP MASTER ND	0
327	10	100600	14.00-24 24 PR GRIP MASTER ND TT	GRIP MASTER ND	0
328	10	102792	14.00-25 12 PR GRIP MASTER ND TT	GRIP MASTER ND	0
329	10	100130	14.00-25 24 PR GRIP MASTER ND TT	GRIP MASTER ND	0
330	10	100125	14.00-24 28 PR GRIP MASTER ND TT	GRIP MASTER ND	0
331	10	104610	14.00-24 28 PR GRIP MASTER ND TT	GRIP MASTER ND	0
332	10	100127	14.00-25 20 PR GRIP MASTER ND TT	GRIP MASTER ND	0
333	13	100178	18.00-25 32 PR GRIP MASTER ND TL	GRIP MASTER ND	0
334	13	100183	18.00-25 40 PR GRIP MASTER ND TL	GRIP MASTER ND	0
335	10	100814	15.5-25 12 PR LOADER XL TT	LOADER XL	-
336	14	100820	17.5-25 12 PR LOADER XL TL	LOADER XL	-
337	14	100822	17.5-25 16 PR LOADER XL TL	LOADER XL	-
338	14	113236	17.5-25 24 PR LOADER XL TL	LOADER XL	-
339	17	100859	20.5-25 12 PR LOADER XL TL	LOADER XL	-
340	17	100857	20.5-25 16 PR LOADER XL TL	LOADER XL	-

SKU CODE INDEX

BIAS						
SL No.	RIM SIZE	SKU CODE	SIZE	PATTERN	LI/SS	PAGE NO.
341	13	103191	"405/70-20 (16.0/70-20) 16 PR TRAC XL TL"	TRAC XL	-	
342	7.5	100038	10.00-20 18 PR TRAC XL TT	TRAC XL	144 G	
343	8	103179	11.00-20 18 PR TRAC XL TT	TRAC XL	146 G	
344	8.5	101551	12.00-24 20PR TRAC XL TT	TRAC XL	-	
345	10	100117	14.00-20 22 PR TRAC XL TT	TRAC XL	-	
346	14	100163	17.5-25 16 PR TRAC XL TL	TRAC XL	-	
347	14	100169	17.5-25 20 PR TRAC XL TL	TRAC XL	-	
348	14	106021	17.5-25 32 PR TRAC XL TL	TRAC XL	-	
349	17	100210	20.5-25 20 PR TRAC XL TL	TRAC XL	-	
350	19.5	100220	23.5-25 20 PR TRAC XL TL	TRAC XL	-	
351	22	100852	26.5-25 24 PR TRAC XL TL	TRAC XL	-	
352	22	101191	26.5-25 28 PR TRAC XL TL	TRAC XL	-	
353	25	103783	29.5-25 32 PR TRAC XL TL	TRAC XL	-	
354	25	114483	29.5-25 34 PR TRAC XL TL	TRAC XL	-	
355	DW20	101714	23.1-26 8 PR C305 TL	C305	154 A8	
356	DW20	100215	23.1-26 12 PR C305 TL	C305	153 A8	
357	DW20	101209	23.1-26 16 PR C305 TL	C305	159 A8	
358	DW20	107324	23.1-26 18 PR C305 TL	C305	179 B	
359	W13L	106951	400/80-24 - LOADPRO BIAS TL	LOADPRO BIAS	162 A8	
360	W15L	106952	440/80-24 - LOADPRO BIAS TL	LOADPRO BIAS	168 A8	
361	W15L	107551	440/80-28 14 PR LOADPRO BIAS TL	LOADPRO BIAS	156 A8	
362	13	104361	15.5/80-24 16 PR LIFTPRO TL	LIFTPRO	163 A6 151 A6	
363	8.5	100104	12.00-24 20 PR ROCK XL TT	ROCK XL	155F	
364	11.25	100810	16.00-25 32 PR ROCK XL TL	ROCK XL	0	
365	11.25	112900	16.00-25 40 PR ROCK XL TL	ROCK XL	0	
366	13	101198	18.00-25 40 PR ROCK XL TL	ROCK XL	0	
367	13	100197	18.00-33 40 PR ROCK XL TL	ROCK XL	0	
368	15	100850	21.00-25 40 PR ROCK XL TL	ROCK XL	0	
369	15	101403	21.00-35 36 PR ROCK XL TL	ROCK XL	0	
370	17	101439	24.00-35 48 PR ROCK XL TL	ROCK XL	0	
371	13	101263	18.00-25 32 PR GM XL TL	GM XL	0	
372	8.5	101691	12.00-24 20 PR PORT PRO RX TT	PORT PRO RX	0	
373	13	101750	18.00-25 40 PR PORT PRO RX TL	PORT PRO RX	0	
374	13	102116	18.00-33 40 PR PORT PRO RX TL	PORT PRO RX	0	
375	13	101770	18.00-25 40 PR PORT PRO TX TL	PORT PRO TX	0	
376	15	101771	21.00-25 40 PR PORT PRO TX TL	PORT PRO TX	0	
377	15	101676	21.00-35 40 PR PORT PRO TX TL	PORT PRO TX	0	
378	13	103922	18.00-25 40 PR PORT XL PLUS TL	PORT XL PLUS	-	
379	13	101993	18.00-25 40 PR PORT PRO SL TL	PORT PRO SL	0	
380	13	102111	18.00-25 40 PR PORT PRO SL TL	PORT PRO SL	0	
381	13	101708	18.00-33 40 PR PORT PRO SL TL	PORT PRO SL	0	
382	8.5	100089	12.00-20 20 PR SLICK 404 TT	SLICK 404	0	
383	8.5	100589	12.00-24 20 PR SLICK 404 TT	SLICK 404	0	
384	8.5	100107	12.00-24 24 PR SLICK 404 TT	SLICK 404	0	
385	10	103599	14.00-24 28 PR SLICK 404 TT	SLICK 404	0	
386	14	100168	17.5-25 20 PR SLICK 404 TL	SLICK 404	0	
387	14	101964	17.5-25 24 PR SLICK 404 TL	SLICK 404	0	
388	13	101702	18.00-25 32 PR SLICK 404 TL	SLICK 404	0	
389	13	100645	18.00-25 40 PR SLICK 404 TL	SLICK 404	0	

SKU CODE INDEX

BIAS						
SL No.	RIM SIZE	SKU CODE	SIZE	PATTERN	LI/SS	PAGE NO.
390	11.25	100156	16.00-25 32 PR SLICK 431 TL	SLICK 431	0	
391	7.5	114052	250-15 16 PR ELEVETA X3 TT	ELEVETA X3	0	
392	8	114053	300-15 20 PR ELEVETA X3 TT	ELEVETA X3	0	
393	3.00D	113889	5.00-8 10 PR ELEVETA X3 TT	ELEVETA X3	0	
394	4	113306	6.00-9 10 PR ELEVETA X3 TT	ELEVETA X3	0	
395	5	113891	6.50-10 10 PR ELEVETA X3 TT	ELEVETA X3	0	
396	5	113280	6.50-10 12 PR ELEVETA X3 TT	ELEVETA X3	0	
397	5	113281	7.00-12 12 PR ELEVETA X3 TT	ELEVETA X3	0	
398	5	113890	7.00-12 14 PR ELEVETA X3 TT	ELEVETA X3	0	
399	5	113893	6.50-10 14 PR ELEVETA X3 TT	ELEVETA X3	0	
400	5.5	113881	7.00-15 12 PR ELEVETA X3 TT	ELEVETA X3	0	
401	6	113882	7.50-15 12 PR ELEVETA X3 TT	ELEVETA X3	0	
402	6	114049	7.50-16 16 PR ELEVETA X3 TT	ELEVETA X3	0	
403	6.5	113307	8.25-15 14 PR ELEVETA X3 TT	ELEVETA X3	0	
404	6.5	113892	8.25-15 16 PR ELEVETA X3 TT	ELEVETA X3	0	
405	6	114051	21x8-9 18 PR ELEVETA X3 TT	ELEVETA X3	0	
406	7	113308	"28X9-15 (8.15-15) 14 PR ELEVETA X3 TT"	ELEVETA X3	0	
407	7.0X20	107476	9.00-20 NHS 14 PR ELEVETA PLUS TT	ELEVETA PLUS	0	
408	7.0X20	107475	10.00-20 NHS 16 PR ELEVETA PLUS TT	ELEVETA PLUS	0	
409	8	114302	11.00-20 NHS 18 PR ELEVETA PLUS TT	ELEVETA PLUS	0	
410	8.5X20	107474	12.00-20 NHS 20 PR ELEVETA PLUS TT	ELEVETA PLUS	0	
411	8.5X20	107473	12.00-20 NHS 28 PR ELEVETA PLUS TT	ELEVETA PLUS	0	
412	W11	114584	12.4-24 10PR FARMAX +R1 TT	FARMAX +R1	125 A8	
413	W13	114585	14.9-24 12PR FARMAX +R1 TT	FARMAX +R1	136 A8	
414	W 13	114586	14.9-28 10PR FARMAX +R1 TT	FARMAX +R1	134 A8	
415	W16	114587	18.4-30 12PR FARMAX +R1 TT	FARMAX +R1	149A8	

HIGH POWER TRACTOR



TORQUEMAX



FARMAX HPT

SPRAYER



SPRAYMAX

MID & LOW HP TRACTOR



FARMAX R65



FARMAX R70



FARMAX R75



**FARMAX
R80/85/90**



**FARMAX
R85/90 R2**



**FARMAX
R65 X3**

MULTIPURPOSE TRACTOR



MULTILOADMAX

ROW CROP



FARMAX RC

RADIAL HARVESTER



YIELDMAX



YIELDMAX VFLEX

RADIAL FLOTATION



**FLOATMAX
FT**



**FLOATMAX
RT**



**FLOATMAX
CARGO XL**



**FLOATMAX
VF X3**

RADIAL IMPLEMENT



**FARM
IMPLEMENT 800R**



**HI-FLEX
IMPLEMENT**

AGRO INDUSTRIAL



**LOAD PRO
HARD SURFACE**



LOAD PRO

TURF



LAWNMAX

AGRICULTURE (EV TRACTOR)



ENERGYMAX



LIFT PRO

BIAS TRACTOR



FARMAX R1



FARMAX R2



FARMAX F2



FARMAX X3 TF



FARMAX F2M

BIAS HARVESTER



FARMAX R1 HD



YIELDMAX 23

BIAS IMPLEMENT



FARMAX AS



**FARM
IMPLEMENT
AWI 305**



**FARM
IMPLEMENT
404**



**FARM
IMPLEMENT LP**



**HIGHWAY
IMPLEMENT
T422**

BIAS FLOTATION



**FLOTATION
PLUS**



**FLOTATION
T422**



**T422
VALUE-PRO**



**FLOTATION
TX440**



TR 800

IRRIGATION



IRROGATOR

TURF



TURF XL

FORESTRY



LOGGER XL



FOREST XL

CONSTRUCTION & INDUSTRIAL



GM LOADER HD



GRIP X HD



LOADER PRO HD



MPT 503

CONSTRUCTION & INDUSTRIAL



MPT 602



MPT 800



MPT 808



TYROCK



TYROCK SUPER



TYROCK SUPER X3



GRIP MASTER EX



GRADER XL



GRADER XL PLUS



GMND GRADER G3



GRIP MASTER - ND



LOADER XL



TRAC XL



C 305

AGRO INDUSTRIAL



LOADPRO



LIFTPRO

MINING



ROCK XL



GRIP MASTER XL

PORT & MATERIAL HANDLING



PORT PRO RX



PORT PRO TX



PORT XL PLUS



PORT PRO SL



SLICK 404



SLICK 431



ELEVETA X3



ELEVETA PLUS

AGRICULTURE



FARMAX +R1

TABLE HEADER

Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Speed			kmph mph		
			SW	OD				Static	10 6	20 12	30 19	40 25	50 31
			mm in	mm in	mm in	mm in		bar psi	Maximum Load			kg lbs	

LI- LOAD INDEX
SS- SPEED SYMBOL

INFLATION PRESSURE

SECTION WIDTH

SPEED INDICATION

OVERALL DIAMETER

STATIC LOADED RADIUS

ROLLING CIRCUMFERENCE

VF AND IF TECHNOLOGY – BENEFITS



The 2 major characteristics which set VF and IF tyres apart from the standard radials:-

Higher load carrying capacity:

The VF (Very high flexion) tyres are designed to carry 40% more load as compared to standard radial tyres at the same pressure. On the other hand, the IF (Increased Flexion) tyres are equipped to carry 20% higher load than the standard radial tyres at the same pressure.

Reduced soil compaction:

In the field, VF tyres can be operated at 40% lower air pressure as compared to standard radials for the same load. For the IF tyres, the air pressure can be lowered by 20% compared to standard radials while carrying the same load. The lower pressure of VF and IF tyres produce a larger tyre footprint which leads to lower soil compaction.



RADIAL TRACTOR



HIGH POWER TRACTOR



FEATURES AND BENEFITS

Stepped lug design

Better grip



Tilted lug tip

Lower vibration at
high speed



Wider tread width

Lower compaction



Stronger &
wider lugs
Longer life



Lower lug angle at
the shoulder
Better traction



Rounded shoulder
Less crop damage



TORQUEMAX

TRA CODE : R-1W



TORQUEMAX VF

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Tractor Application				Cyclic Operation	
		mm	mm					20	30	40 - 65	10	bar	10
		in	in	in	in	in	psi	12	19	25 - 40	6	psi	6
VF620/ 70R26	DW21B DW20B DW23B	612 24.1	1518 59.8	648 25.5	4483 176.5	173D	2.8	6550	6430	6300	6930	1.4	3920
							41	14430	14160	13880	15260	20	8630
							0.6	2860	2800	3080	2910	1.6	4550
							9	6300	6170	6780	6410	23	10020
							0.8	3320	3250	3580	3380	1.8	5250
							12	7310	7160	7890	7440	26	11560
							1	3830	3750	4130	3900	2	5780
							15	8440	8260	9100	8590	29	12730
							1.2	4210	4125	4540	4290	2.4	7210
							17	9270	9090	10000	9450	35	15880
							1.4	5250	5150	5670	5360	3.6	8820
							20	11560	11340	12490	11810	52	19430

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Tractor Application				Cyclic Operation	
		mm	mm					10	20	30	40 - 65	bar	10
		in	in	in	in	in	psi	6	12	19	25 - 40	psi	6
VF620/ 70R30	DW21B DW20B DW23B	608 23.9	1625 64	701 27.6	4799 188.9	175D	0.6	3300	3120	3060	3000	1.4	4200
							9	7270	6870	6740	6610	20	9250
							0.8	3800	3590	3520	3450	1.6	4830
							12	8370	7910	7750	7600	23	10640
							1	4400	4160	4080	4000	1.8	5600
							15	9690	9160	8990	8810	26	12330
							1.2	4950	4680	4590	4500	2	6300
							17	10900	10310	10110	9910	29	13880
							1.4	5360	5070	4970	4875	2.2	6830
							20	11810	11170	10950	10740	32	15040
							2.8	7590	7180	7040	6900	3.6	9660
							41	16720	15810	15510	15200	52	21280

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Tractor Application				Cyclic Operation	
		mm	mm					10	20	30	40 - 65	bar	10
		in	in	in	in	in	psi	6	12	19	25 - 40	psi	6
VF620/ 75R30	DW21B DW20B DW23B	650 25.6	1692 66.6	726 28.6	4997 196.7	172D	0.6	3470	3280	3210	3150	1.4	4410
							9	7640	7220	7070	6940	20	9710
							9710~	0.8	4020	3800	3720	3650	1.6
							5110	12	8850	8370	8190	8040	23
							11260	11260~	1.0	4680	4420	4340	4250
							1.8	5950	15	10310	9740	9560	9360
							26	13110	1.2	5230	4940	4850	4750
							2.0	6650	17	11520	10880	10680	10460
							29	14650	1.4	5830	5510	5410	5300
							2.2	7420	20	12840	12140	11920	11670
							32	16340	2.0	6930	6550	6430	6300
							2.8	8820	29	15260	14430	14160	13880

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Tractor Application				Cyclic Operation					
		mm	mm					mm	mm	mm	bar	10	20	30	40 – 65	bar	10
		in	in					in	in	in	psi	6	12	19	25 – 40	psi	6
VF650/ 60R34	DW23B DW21B	650 25.6	1644 64.7	725 28.5	4865 191.5	168D	0.6	3080	2910	2860	2800	1.4	3920				
							9	6780	6410	6300	6170	20	8630				
							0.8	3550	3360	3290	3230	1.6	4520				
							12	7820	7400	7250	7110	23	9960				
							1.2	4570	4320	4230	4150	2	5810				
							17	10070	9520	9320	9140	29	12800				
							1.6	5580	5270	5170	5070	2.4	7100				
							23	12290	11610	11390	11170	35	15640				
							2	6160	5820	5710	5600	2.8	7840				
							29	13570	12820	12580	12330	41	17270				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Tractor Application				Cyclic Operation					
		mm	mm					mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in					in	in	in	psi	6	12	19	25 - 40	psi	6
VF650/ 60R38	DW23B DW21B	655 25.8	1745 68.7	772 30.4	5153 202.9	173D	0.6	3190	3020	2960	2900	1.4	4060				
							9	7030	6650	6520	6390	20	8940				
							0.8	3800	3590	3520	3450	1.6	4830				
							12	8370	7910	7750	7600	23	10640				
							1.0	4260	4030	3950	3875	1.8	5430				
							15	9380	8880	8700	8540	26	11960				
							1.2	4810	4550	4460	4375	2.0	6130				
							17	10590	10020	9820	9640	29	13500				
							1.4	5360	5070	4970	4875	2.2	6830				
							20	11810	11170	10950	10740	32	15040				
							2.4	7150	6760	6630	6500	3.2	9100				
							35	15750	14890	14600	14320	46	20040				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Tractor Application				Cyclic Operation					
		mm	mm					mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in					in	in	in	psi	6	12	19	25 - 40	psi	6
VF650/ 65R34 NRO	DW23B DW21B (NRO)	655 25.8	1745 68.7	772 30.4	5153 202.9	173D	0.6	3380	3200	3140	3075	1.4	4310				
							9	7440	7050	6920	6770	20	9490				
							0.8	3930	3710	3640	3570	1.6	5000				
							12	8660	8170	8020	7860	23	11010				
							1.2	5050	4770	4680	4590	2.0	6430				
							17	11120	10510	10310	10110	29	14160				
							1.4	5520	5220	5120	5020	2.2	7030				
							20	12160	11500	11280	11060	32	15480				
							1.6	6000	5670	5560	5450	2.4	7630				
							23	13220	12490	12250	12000	35	16810				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Tractor Application				Cyclic Operation	
		mm	mm	mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in	in	in	in	psi	6	12	19	25 - 40	psi	6
VF650/ 65R34 NRO	DW23B DW21B (NRO)	650 25.6	1710 67.3	750 29.5	5061 199.3	170D	0.6	3380	3200	3140	3075	1.4	4310
							9	7440	7050	6920	6770	20	9490
							0.8	3930	3710	3640	3570	1.6	5000
							12	8660	8170	8020	7860	23	11010
							1.2	5050	4770	4680	4590	2.0	6430
							17	11120	10510	10310	10110	29	14160
							1.4	5520	5220	5120	5020	2.2	7030
							20	12160	11500	11280	11060	32	15480
							2.0	6600	6240	6120	6000	2.8	8400
							29	14540	13740	13480	13220	41	18500

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Tractor Application				Cyclic Operation	
		mm	mm	mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in	in	in	in	psi	6	12	19	25 - 40	psi	6
VF650/ 65R38 NRO	DW23B DW20B (NRO)	650 25.6	1815 71.5	798 31.4	5360 211.0	175D	0.6	3580	3380	3320	3250	1.4	4550
							9	7890	7440	7310	7160	20	10020
							0.8	4130	3900	3830	3750	1.6	5250
							12	9100	8590	8440	8260	23	11560
							1.2	5310	5020	4930	4830	2.0	6760
							17	11700	11060	10860	10640	29	14890
							1.6	6300	5960	5840	5730	2.4	8020
							23	13880	13130	12860	12620	35	17670
							2.4	7590	7180	7040	6900	3.2	9660
							35	16720	15810	15510	15200	46	21280

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Tractor Application				Cyclic Operation	
		mm	mm	mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in	in	in	in	psi	6	12	19	25 - 40	psi	6
VF650/ 65R42 NRO	DW23B DW21B DW20 (NRO)	650 25.6	1913 75.3	847 33.3	5649 222.4	174D	0.6	3690	3480	3420	3350	1.4	4690
							9	8130	7670	7530	7380	20	10330
							0.8	4330	4100	4020	3940	1.6	5520
							12	9540	9030	8850	8680	23	12160
							1.2	5570	5260	5160	5060	2.0	7080
							17	12270	11590	11370	11150	29	15590
							1.6	6600	6240	6120	6000	2.4	8400
							23	14540	13740	13480	13220	35	18500
							2.0	7370	6970	6830	6700	2.8	9380
							29	16230	15350	15040	14760	41	20660

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application				Cyclic Operation		
		mm	mm					10	20	30	40 - 65	bar	15	30
		in	in	in	in	in	psi	6	12	19	25 - 40	psi	9	19
VF650/ 85R38	DW21B DW20B DW23B	663 26.1	2071 81.5	892 35.1	6135 241.5	182D	0.6	5400	4590	4420	4250	0.6	6588	5525
							9	11890	10110	9740	9360	9	14510	12170
							0.8	6190	5270	5070	4875	0.8	7556	6338
							12	13630	11610	11170	10740	12	16640	13960
							1.2	8000	6800	6550	6300	1.2	9765	8190
							17	17620	14980	14430	13880	17	21510	18040
							1.4	9020	7670	7380	7100	1.4	11005	9230
							20	19870	16890	16260	15640	20	24240	20330
							1.8	9840	8370	8060	7750	1.8	12013	10075
							26	21670	18440	17750	17070	26	26460	22190
							2.0	10800	9180	8840	8500	2.0	13175	11050
							29	23790	20220	19470	18720	29	29020	24340

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application				Cyclic Operation		
		mm	mm					10	20	30	40 - 65	bar	10	
		in	in	in	in	in	psi	6	12	19	25 - 40	psi	6	
VF650/ 85R42	DW23 DW20 DW21	660 26.0	2175 85.6	944 37.2	6423 252.9	183D	0.6	4810	4550	4460	4375	1.4	6130	
							9	10590	10020	9820	9640	20	13500	
							0.8	5670	5360	5250	5150	1.6	7210	
							12	12490	11810	11560	11340	23	15880	
							1.2	7150	6760	6630	6500	2.0	9100	
							17	15750	14890	14600	14320	29	20040	
							1.6	8800	8320	8160	8000	2.4	11200	
							23	19380	18330	17970	17620	35	24670	
							2.0	9630	9100	8930	8750	2.8	12250	
							29	21210	20040	19670	19270	41	26980	

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application				Cyclic Operation		
		mm	mm					10	20	30	40 - 65	bar	10	
		in	in	in	in	in	psi	6	12	19	25 - 40	psi	6	
VF710/ 55R30 NRO	DW25B DW24B DW27B DW23B (NRO)	710 28.0	1544 60.8	671 26.4	4560 179.5	165D	0.6	3080	2910	2860	2800	1.4	3920	
							9	6780	6410	6300	6170	20	8630	
							0.8	3580	3380	3320	3250	1.6	4550	
							12	7890	7440	7310	7160	23	10020	
							1.0	4130	3900	3830	3750	1.8	5250	
							15	9100	8590	8440	8260	26	11560	
							1.2	4540	4290	4210	4125	2.0	5780	
							17	10000	9450	9270	9090	29	12730	
							1.4	5090	4810	4720	4625	2.2	6480	
							20	11210	10590	10400	10190	32	14270	
							1.6	5670	5360	5250	5150	2.4	7210	
							23	12490	11810	11560	11340	35	15880	

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Tractor Application				Cyclic Operation	
		mm	mm	mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in	in	in	in	psi	6	12	19	25 - 40	psi	6
VF710/ 55R30 NRO	DW25B DW24B DW27B DW23B (NRO)	710 28.0	1544 60.8	671 26.4	4560 179.5	165D	0.6	3080	2910	2860	2800	1.4	3920
							9	6780	6410	6300	6170	20	8630
							0.8	3580	3380	3320	3250	1.6	4550
							12	7890	7440	7310	7160	23	10020
							1.0	4130	3900	3830	3750	1.8	5250
							15	9100	8590	8440	8260	26	11560
							1.2	4540	4290	4210	4125	2.0	5780
							17	10000	9450	9270	9090	29	12730
							1.4	5090	4810	4720	4625	2.2	6480
							20	11210	10590	10400	10190	32	14270
							1.6	5670	5360	5250	5150	2.4	7210
							23	12490	11810	11560	11340	35	15880

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Tractor Application				Cyclic Operation	
		mm	mm	mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in	in	in	in	psi	6	12	19	25 - 40	psi	6
VF710/ 60R30	DW25B DW24B DW27B DW23B (NRO)	708 27.9	1614 63.5	710 28.0	4766 187.6	171D	0.6	3300	3120	3060	3000	1.4	4200
							9	7270	6870	6740	6610	20	9250
							0.8	3910	3690	3620	3550	1.6	4970
							12	8610	8130	7970	7820	23	10950
							1.0	4400	4160	4080	4000	1.8	5600
							15	9690	9160	8990	8810	26	12330
							1.2	4950	4680	4590	4500	2.0	6300
							17	10900	10310	10110	9910	29	13880
							1.4	5500	5200	5100	5000	2.4	7000
							20	12110	11450	11230	11010	35	15420
							2.0	6770	6400	6270	6150	3.6	8610
							29	14910	14100	13810	13550	52	18960

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Tractor Application				Cyclic Operation	
		mm	mm	mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in	in	in	in	psi	6	12	19	25 - 40	psi	6
VF710/ 60R34	DW25B DW24B DW27B	708 27.9	1716 67.6	748 29.4	5068 199.5	173D	0.6	3470	3280	3210	3150	1.4	4410
							9	7640	7220	7070	6940	20	9710
							0.8	4130	3900	3830	3750	1.6	5250
							12	9100	8590	8440	8260	23	11560
							1.0	4680	4420	4340	4250	1.8	5950
							15	10310	9740	9560	9360	26	13110
							1.2	5230	4940	4850	4750	2.0	6650
							17	11520	10880	10680	10460	29	14650
							1.4	5830	5510	5410	5300	2.2	7420
							20	12840	12140	11920	11670	32	16340
							2.0	7150	6760	6630	6500	2.8	9100
							29	15750	14890	14600	14320	41	20040

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Tractor Application				Cyclic Operation	
		mm	mm	mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in	in	in	in	psi	6	12	19	25 - 40	psi	6
VF710/ 60R38 NRO	DW24B DW27B DW23B (NRO)	710 28.0	1820 71.7	799 31.5	5375 211.6	171D	0.6	4400	4160	4080	4000	1.4	5600
							9	9690	9160	8990	8810	20	12330
							0.8	4280	4050	3970	3890	1.6	5450
							12	9430	8920	8740	8570	23	12000
							1.0	4900	4630	4540	4450	1.8	6230
							15	10790	10200	10000	9800	26	13720
							1.2	5510	5210	5110	5010	2.0	7010
							17	12140	11480	11260	11040	29	15440
							1.4	6120	5780	5670	5560	2.2	7780
							20	13480	12730	12490	12250	32	17140
							1.6	6770	6400	6270	6150	2.4	8610
							23	14910	14100	13810	13550	35	18960

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Tractor Application				Cyclic Operation	
		mm	mm	mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in	in	in	in	psi	6	12	19	25 - 40	psi	6
VF710/ 60R42 NRO	DW24B DW27B DW23B (NRO)	710 28.0	1920 75.6	850 33.5	5670 223.2	173D	0.8	4540	4290	4210	4125	1.6	5780
							12	10000	9450	9270	9090	23	12730
							1.0	5090	4810	4720	4625	1.8	6480
							15	11210	10590	10400	10190	26	14270
							1.2	5830	5510	5410	5300	2.0	7420
							17	12840	12140	11920	11670	29	16340
							1.4	6380	6030	5920	5800	2.2	8120
							20	14050	13280	13040	12780	32	17890
							1.6	7150	6760	6630	6500	2.4	9100
							23	15750	14890	14600	14320	35	20040

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Tractor Application				Cyclic Operation	
		mm	mm	mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in	in	in	in	psi	6	12	19	25 - 40	psi	6
VF710/ 70R38	DW25B DW23B DW24B	720 28.3	1959 77.1	841 33.1	5790 228.0	178D	0.6	4400	4160	4080	4000	1.4	5600
							9	9690	9160	8990	8810	20	12330
							0.8	5200	4920	4820	4730	1.6	6620
							12	11450	10840	10620	10420	23	14580
							1.0	5950	5630	5520	5410	1.8	7570
							15	13110	12400	12160	11920	26	16670
							1.2	6690	6320	6200	6080	2.0	8510
							17	14740	13920	13660	13390	29	18740
							1.4	7440	7030	6900	6760	2.2	9460
							20	16390	15480	15200	14890	32	20840
							1.6	8250	7800	7650	7500	2.4	10500
							23	18170	17180	16850	16520	35	23130

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Tractor Application				Cyclic Operation	
		mm	mm	mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in	in	in	in	psi	6	12	19	25 - 40	psi	6
VF710/ 70R42	DW25B DW23B DW24B	720 28.3	2061 81.1	902 35.5	6119 240.9	185D	0.6	4680	4420	4340	4250	1.4	5950
							9	10310	9740	9560	9360	20	13110
							0.8	5450	5150	5050	4950	1.6	6930
							12	12000	11340	11120	10900	23	15260
							1.2	7000	6610	6490	6360	2.0	8900
							17	15420	14560	14300	14010	29	19600
							1.6	8560	8090	7940	7780	2.4	10890
							23	18850	17820	17490	17140	35	23990
							2.0	9380	8870	8700	8530	2.8	11940
							29	20660	19540	19160	18790	41	26300
							2.4	10180	9620	9440	9250	3.2	12950
							35	22420	21190	20790	20370	46	28520

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Tractor Application				Cyclic Operation	
		mm	mm	mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in	in	in	in	psi	6	12	19	25 - 40	psi	6
IF520/ 85R38	DW18L DW16	536 21.1	1849 72.8	832 32.8	5402 212.7	167D	0.8	3810	3240	3120	3000	1.6	4200
							12	8390	7140	6870	6610	23	9250
							1.2	4920	4140	4030	3875	2.0	5430
							17	10840	9120	8880	8540	29	11960
							1.6	5870	5000	4810	4625	2.4	6480
							23	12930	11010	10590	10190	35	14270
							2.0	6540	5560	5360	5150	2.8	7210
							29	14410	12250	11810	11340	41	15880
							2.4	6920	5890	5670	5450	3.2	7630
							35	15240	12970	12490	12000	46	16810

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Tractor Application				Cyclic Operation	
		mm	mm	mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in	in	in	in	psi	6	12	19	25 - 40	psi	6
IF600/ 70R30	DW21B DW20B	603 23.7	1602 63.1	726 28.6	4781 188.2	165D	0.8	3560	3020	2910	2800	1.6	3920
							12	7840	6650	6410	6170	23	8630
							1.2	4640	3940	3800	3650	2.0	5110
							17	10220	8680	8370	8040	29	11260
							1.6	5560	4730	4550	4375	2.4	6130
							23	12250	10420	10020	9640	35	13500
							2.0	6190	5270	5070	4875	2.8	6830
							29	13630	11610	11170	10740	41	15040
							2.4	6540	5560	5360	5150	3.2	7210
							35	14410	12250	11810	11340	46	15880

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Tractor Application				Cyclic Operation	
		mm	mm	mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in	in	in	in	psi	6	12	19	25 - 40	psi	6
IF600/ 70R34	DW21B DW20B	603 23.7	1704 67.1	768 30.2	5086 200.2	160D	0.8	3770	3210	3090	2970	1.6	6300
							12	8300	7070	6810	6540	23	13880
							1.0	4310	3660	3530	3390	1.8	4750
							15	9490	8060	7780	7470	26	10460
							1.2	4850	4130	3970	3820	2.0	5350
							17	10680	9100	8740	8410	29	11780
							1.4	5380	4580	4410	4240	2.2	5940
							20	11850	10090	9710	9340	32	13080
							1.6	5720	4860	4680	4500	2.4	6340
							23	12600	10700	10310	9910	35	13960

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Tractor Application				Cyclic Operation	
		mm	mm	mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in	in	in	in	psi	6	12	19	25 - 40	psi	6
IF600/ 70R34	DW21B DW20B	603 23.7	1704 67.1	768 30.2	5086 200.2	167D	0.8	3770	3210	3090	2970	1.6	6340
							12	8300	7070	6810	6540	23	13960
							1.2	4850	4130	3970	3820	2.0	5350
							17	10680	9100	8740	8410	29	11780
							1.6	5750	4890	4710	4530	2.4	6440
							23	12670	10770	10370	9980	35	14190
							2.0	6500	5530	5320	5120	2.8	7170
							29	14320	12180	11720	11280	41	15790
							2.4	6920	5890	5670	5450	3.2	7630
							35	15240	12970	12490	12000	46	16810

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Tractor Application				Cyclic Operation	
		mm	mm	mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in	in	in	in	psi	6	12	19	25 - 40	psi	6
IF650/ 60R34	DW23B DW21B	650 25.6	1644 64.7	735 28.9	4855 191.1	159D	0.8	3560	3020	2910	2800	1.6	3920
							12	7840	6650	6410	6170	23	8630
							1.0	4000	3400	3280	3150	1.8	4410
							15	8810	7490	7220	6940	26	9710
							1.2	4510	3830	3690	3550	2.0	4970
							17	9930	8440	8130	7820	29	10950
							1.6	5560	4730	4550	4375	2.4	6130
							23	12250	10420	10020	9640	35	13500

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Tractor Application				Cyclic Operation			
		mm	mm	mm	mm	mm	bar	10	20	30	40 - 65	bar	10	15	30
		in	in	in	in	in	psi	6	12	19	25 - 40	psi	6	9	19
IF710/ 70R38 CFO	DW25B DW23B DW24B	720 28.3	1959 77.1	850 33.5	5800 228.3	178D	0.8	5080	4320	4160	4000	0.8	6800	6200	5200
							12	11190	9520	9160	8810	12	14980	13660	11450
							1.2	6540	5560	5360	5150	1.2	8755	7983	6695
							17	14410	12250	11810	11340	17	19280	17580	14750
							1.6	8000	6800	6550	6300	1.6	10710	9765	8190
							23	17620	14980	14430	13880	23	23590	21510	18040
							2.0	8760	7450	7180	6900	2.0	11730	10695	8970
							29	19300	16410	15810	15200	29	25840	23560	19760
							2.4	9530	8100	7800	7500	2.4	12750	11625	9750
							35	20990	17840	17180	16520	35	28080	25610	21480

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)											
								Speed,km/h(mph)											
		SW	OD					Tractor Application				CFO							
		mm	mm					mm	mm	mm	bar	10	20	30	40 - 65	bar	10	15	30
		in	in					in	in	in	psi	6	12	19	25 - 40	psi	6	9	19
IF710/ 70R38 CFO	DW25B DW23B DW24B	720 28.3	1959 77.1	850 33.5	5800 228.3	181 A8 78B	0.8	5080	4320	4160	4000	0.8	6800	6200	5200				
							12	11190	9520	9160	8810	12	14980	13660	11450				
							1.2	6620	5630	5420	5210	1.2	8857	8075	6773				
							17	14580	12400	11940	11480	17	19510	17790	14920				
							1.6	8090	6880	6620	6370	1.6	10829	9873	8281				
							23	17820	15150	14580	14030	23	23850	21750	18240				
							2.4	9530	8100	7800	7500	2.4	12750	11625	9750				
							35	20990	17840	17180	16520	35	28080	25610	21480				
							2.8	10480	8910	8580	8250	2.8	14025	12787	10725				
							41	23080	19630	18900	18170	41	30890	28170	23620				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)											
								Speed,km/h(mph)											
		SW	OD					Tractor Application				CFO							
		mm	mm					mm	mm	mm	bar	10	20	30	40 - 65	bar	10	15	30
		in	in					in	in	in	psi	6	12	19	25 - 40	psi	6	9	19
IF710/ 70R38 CFO	DW25B DW23B DW24B	720 28.3	2061 81.1	932 36.7	6125 241.1	179D	0.8	5380	4580	4410	4240	0.8	7208	6572	5512				
							12	11850	10090	9710	9340	12	15880	14480	12140				
							1.2	6920	5890	5670	5450	1.2	9265	8447.5	7085				
							17	15240	12970	12490	12000	17	20410	18610	15610				
							1.6	8460	7190	6930	6660	1.6	11322	10323	8658				
							23	18630	15840	15260	14670	23	24940	22740	19070				
							2.0	9280	7890	7600	7310	2.0	12427	11330.5	9503				
							29	20440	17380	16740	16100	29	27370	24960	20930				
							2.4	9840	8370	8060	7750	2.4	13175	12012.5	10075				
							35	21670	18440	17750	17070	35	29020	26460	22190				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Tractor Application				Cyclic Operation			
		mm	mm					10	20	30	40 - 65	bar	10		
		in	in					psi	6	12	19	25 - 40	psi	6	
VF710/ 75R42	DW24B DW25B DW23B	705 27.8	2133 84.0	929 36.6	6265 246.7	184D	0.6	4950	4680	4590	4500	1.4	6300		
							9	10900	10310	10110	9910	20	13880		
							0.8	5830	5510	5410	5300	1.6	7420		
							12	12840	12140	11920	11670	23	16340		
							1.2	7370	6970	6830	6700	2.0	9380		
							17	16230	15350	15040	14760	29	20660		
							1.6	9080	8580	8420	8250	2.4	11550		
							23	20000	18900	18550	18170	35	25440		
							2.0	9900	9360	9180	9000	2.8	12600		
							29	21810	20620	20220	19820	41	27750		

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application				Cyclic Operation		
		mm	mm	mm	mm	mm	bar	10	20	30	40 - 65	bar	15	30
		in	in	in	in	in	psi	6	12	19	25 - 40	psi	9	19
VF750/ 65R26 CFO	DW27B DW25B DW28B	705 27.8	1640 64.6	693 27.3	4843 190.7	180D	0.6	3800	3590	3520	3450	0.6	4590	3830
							9	8370	7910	7750	7600	9	10110	8440
							0.8	4400	4160	4080	4000	0.8	5320	4440
							12	9690	9160	8990	8810	12	11720	9780
							1.2	5500	5200	5100	5000	1.2	6650	5550
							17	12110	11450	11230	11010	17	14650	12220
							1.6	6770	6400	6270	6150	1.6	8180	6830
							23	14910	14100	13810	13550	23	18020	15040
							2.0	7370	6970	6830	6700	2.0	8910	7440
							29	16230	15350	15040	14760	29	19630	16390
							2.8	8800	8320	8160	8000	2.8	10640	8880
							41	19380	18330	17970	17620	41	23440	19560

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application				Cyclic Operation		
		mm	mm	mm	mm	mm	bar	10	20	30	40 - 65	bar	10	
		in	in	in	in	in	psi	6	12	19	25 - 40	psi	6	
VF750/ 75R46	DW25B	750 29.5	2294 90.3	1001 39.4	6774 266.7	189D	0.6	5670	5360	5250	5150	1.4	7210	
							9	12490	11810	11560	11340	20	15880	
							0.8	6560	6200	6080	5960	1.6	8340	
							12	14450	13660	13390	13130	23	18370	
							1.2	8440	7980	7820	7670	2.0	10740	
							17	18590	17580	17220	16890	29	23660	
							1.6	10310	9740	9560	9370	2.4	13120	
							23	22710	21450	21060	20640	35	28900	
							2.0	11330	10710	10510	10300	2.8	14420	
							29	24960	23590	23150	22690	41	31760	

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application				Cyclic Operation		
		mm	mm	mm	mm	mm	bar	10	20	30	40 - 65	bar	15	30
		in	in	in	in	in	psi	6	12	19	25 - 40	psi	9	19
VF800/ 65R32 CFO	DW28B DW27B DW30B	780 30.7	1853 73.0	807 31.8	5356 210.9	184D	0.6	4540	4290	4210	4125	0.6	5590	4680
							9	10000	9450	9270	9090	9	12310	10310
							0.8	5360	5070	4970	4875	0.8	6610	5530
							12	11810	11170	10950	10740	12	14560	12180
							1.2	6600	6240	6120	6000	1.2	8130	6810
							17	14540	13740	13480	13220	17	17910	15000
							1.6	8030	7590	7450	7300	1.6	9890	8290
							23	17690	16720	16410	16080	23	21780	18260
							2.0	9080	8580	8420	8250	2.0	11180	9360
							29	20000	18900	18550	18170	29	24630	20620
							2.6	9900	9360	9180	9000	2.6	12200	10220
							38	21810	20620	20220	19820	38	26870	22510

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Tractor Application				Cyclic Operation	
		mm	mm	mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in	in	in	in	psi	6	12	19	25 - 40	psi	6
VF800/ 70R38	DW28B DW27B DW30B	810 31.9	2085 82.1	898 35.4	6124 241.1	187D	0.6	5360	5070	4970	4875	1.4	6830
							9	11810	11170	10950	10740	20	15040
							0.8	6280	5940	5820	5710	1.6	7990
							12	13830	13080	12820	12580	23	17600
							1.2	8070	7630	7490	7340	2.0	10280
							17	17780	16810	16500	16170	29	22640
							1.6	9870	9330	9150	8970	2.4	12560
							23	21740	20550	20150	19760	35	27670
							1.8	10380	9820	9630	9440	2.6	13220
							26	22860	21630	21210	20790	38	29120
							2.4	10730	10140	9950	9750	3.2	13650
							35	23630	22330	21920	21480	46	30070

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Tractor Application				Cyclic Operation	
		mm	mm	mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in	in	in	in	psi	6	12	19	25 - 40	psi	6
VF900/ 50R42 NRO	DW30B DW28B (NRO)	885 34.8	1967 77.4	867 34.1	5809 228.7	180D	0.6	4680	4420	4340	4250	1.4	5950
							9	10310	9740	9560	9360	20	13110
							0.8	5500	5200	5100	5000	1.6	7000
							12	12110	11450	11230	11010	23	15420
							1.0	6380	6030	5920	5800	1.8	8120
							15	14050	13280	13040	12780	26	17890
							1.2	7150	6760	6630	6500	2.0	9100
							17	15750	14890	14600	14320	29	20040
							1.4	7810	7380	7240	7100	2.2	9940
							20	17200	16260	15950	15640	32	21890
							1.6	8800	8320	8160	8000	2.4	11200
							23	19380	18330	17970	17620	35	24670

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Tractor Application				Cyclic Operation	
		mm	mm	mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in	in	in	in	psi	6	12	19	25 - 40	psi	6
VF900/ 60R38	DW30B	891 35.1	2040 80.3	881 34.7	6024 237.2	193D	0.6	5310	5020	4930	4830	1.4	6760
							9	11700	11060	10860	10640	20	14890
							1.2	7960	7530	7380	7240	2.0	10140
							17	17530	16590	16260	15950	29	22330
							1.6	9740	9200	9030	8850	2.4	12390
							23	21450	20260	19890	19490	35	27290
							2.4	11670	11030	10820	10605	3.2	14850
							35	25700	24300	23830	23360	46	32710
							2.8	12650	11960	11730	11500	3.6	16100
							41	27860	26340	25840	25330	52	35460

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Tractor Application				Cyclic Operation	
		mm	mm				bar	10	20	30	40 - 65	bar	10
		in	in				psi	6	12	19	25 - 40	psi	6
VF900/ 60R42	DW30B	881 34.7	2150 84.6	935 36.8	6349 250.0	189D	0.6	5500	5200	5100	5000	1.4	7000
							9	12110	11450	11230	11010	20	15420
							0.8	6380	6030	5920	5800	1.6	8120
							12	14050	13280	13040	12780	23	17890
							1.0	7370	6970	6830	6700	1.8	9380
							15	16230	15350	15040	14760	26	20660
							1.2	8250	7800	7650	7500	2.0	10500
							17	18170	17180	16850	16520	29	23130
							1.4	9350	8840	8670	8500	2.2	11900
							20	20590	19470	19100	18720	32	26210
							2.0	11330	10710	10510	10300	2.8	14420
							29	24960	23590	23150	22690	41	31760

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Tractor Application				Cyclic Operation	
		mm	mm				bar	10	20	30	40 - 65	bar	10
		in	in				psi	6	12	19	25 - 40	psi	6
VF900/ 65R46	DW30	900 35.4	2330 91.7	1096 43.1	6917 272.3	196D	0.6	6380	6030	5920	5800	1.4	8120
							9	14050	13280	13040	12780	20	17890
							0.8	7370	6970	6830	6700	1.6	9380
							12	16230	15350	15040	14760	23	20660
							1.2	9350	8840	8670	8500	2.0	11900
							17	20590	19470	19100	18720	29	26210
							1.6	11330	10710	10510	10300	2.4	14420
							23	24960	23590	23150	22690	35	31760
							2.4	13750	13000	12570	12500	3.2	17500
							35	30290	28630	27690	27530	46	38550

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Tractor Application				CFO			
		mm	mm				bar	10	20	30	40 - 65	bar	10	15	30
		in	in				psi	6	12	19	25 - 40	psi	6	9	19
IF710/ 75R42 CFO	DW25B DW23B	715 28.1	2133 84.0	944 37.2	6306 248.3	176D	0.8	5730	4870	4690	4510	0.8	7667	6991	5863
							12	12620	10730	10330	9930	12	16890	15400	12910
							1.0	6540	5560	5360	5150	1.0	8755	7983	6695
							15	14410	12250	11810	11340	15	19280	17580	14750
							1.2	7370	6260	6030	5800	1.2	9860	8990	7540
							17	16230	13790	13280	12780	17	21720	19800	16610
							1.6	9020	7670	7380	7100	1.6	12070	11005	9230
							23	19870	16890	16260	15640	23	26590	24240	20330

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)											
								Speed,km/h(mph)											
		SW	OD					Tractor Application				CFO							
		mm	mm					mm	mm	mm	bar	10	20	30	40 - 65	bar	10	15	30
		in	in					in	in	in	psi	6	12	19	25 - 40	psi	6	9	19
IF800/ 70R38 CFO	DW27B DW28B/ D W30B	810 31.9	2085 82.1	925 36.4	6124 241.1	190D	0.8	6190	5270	5070	4875	0.8	8288	7556	6338				
							12	13630	11610	11170	10740	12	18260	16640	13960				
							1.2	8000	6800	6550	6300	1.2	10710	9765	8190				
							17	17620	14980	14430	13880	17	23590	21510	18040				
							1.6	9840	8370	8060	7750	1.6	13175	12013	10075				
							23	21670	18440	17750	17070	23	29020	26460	22190				
							2.0	10800	9180	8840	8500	2.0	14450	13175	11050				
							29	23790	20220	19470	18720	29	31830	29020	24340				
							2.4	11430	9720	9360	9000	2.4	15300	13950	11700				
							35	25180	21410	20620	19820	35	33700	30730	25770				
							3.2	13460	11450	11020	10600	3.2	18020	16430	13780				
							46	29650	25220	24270	23350	46	39690	36190	30350				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)											
								Speed,km/h(mph)											
		SW	OD					Tractor Application				CFO							
		mm	mm					mm	mm	mm	bar	10	20	30	40 - 65	bar	10	15	30
		in	in					in	in	in	psi	6	12	19	25 - 40	psi	6	9	19
IF850/ 75R42 CFO	DW30B DW27B DW28B	857 33.7	2308 90.9	993 39.1	6779 266.9	186D	0.8	6350	5400	5200	5000	0.8	8500	7750	6500				
							12	13990	11890	11450	11010	12	18720	17070	14320				
							1.0	8760	7450	7180	6900	1.0	11730	10695	8970				
							15	19300	16410	15810	15200	15	25840	23560	19760				
							1.2	9840	8370	8060	7750	1.2	13175	12013	10075				
							17	21670	18440	17750	17070	17	29020	26460	22190				
							1.4	10800	9180	8840	8500	1.4	11450	13175	11050				
							20	23790	20220	19470	18720	20	25220	29020	24340				
							1.6	12070	10260	9880	9500	1.6	16150	14725	12350				
							23	26590	22600	21760	20930	23	35570	32430	27200				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Tractor Application				Cyclic Operation					
		mm	mm					mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in					in	in	in	psi	6	12	19	25 - 40	psi	6
VF380/ 85R34	DW13 DW12	393 15.5	1520 59.8	675 26.6	4489 176.7	149D	0.6	1930	1820	1790	1750	1.4	2450				
							9	4250	4010	3940	3850	20	5400				
							0.8	2270	2140	2100	2060	1.6	2880				
							12	5000	4710	4630	4540	23	6340				
							1.0	2530	2390	2350	2300	1.8	3220				
							15	5570	5260	5180	5070	26	7090				
							1.2	2920	2760	2700	2650	2.0	3710				
							17	6430	6080	5950	5840	29	8170				
							1.4	3190	3020	2960	2900	2.2	4060				
							20	7030	6650	6520	6390	32	8940				
							1.6	3580	3380	3320	3250	2.4	4550				
							23	7890	7440	7310	7160	35	10020				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Tractor Application				Cyclic Operation					
		mm	mm					mm	mm	mm	bar	10	20	30	40 – 65	bar	10
		in	in					in	in	in	psi	6	12	19	25 – 40	psi	6
VF520/ 60R28	DW18L	520 20.5	1335 52.6	587 23.1	3942 155.2	149D	0.6	1980	1870	1840	1800	1.4	2520				
							9	4360	4120	4050	3960	20	5550				
							0.8	2330	2200	2160	2120	1.6	2970				
							12	5130	4850	4760	4670	23	6540				
							1.2	3000	2830	2780	2725	2.0	3820				
							17	6610	6230	6120	6000	29	8410				
							1.4	3300	3120	3060	3000	2.2	4200				
							20	7270	6870	6740	6610	32	9250				
							1.6	3580	3380	3320	3250	2.4	4550				
							23	7890	7440	7310	7160	35	10020				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Tractor Application				Cyclic Operation					
		mm	mm					mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in					in	in	in	psi	6	12	19	25 - 40	psi	6
VF520/ 85R38	DW18L DW16L	536 21.1	1849 72.8	823 32.4	5344 210.4	170D	0.6	3300	3120	3060	3000	1.4	4200				
							9	7270	6870	6740	6610	20	9250				
							0.8	3810	3600	3540	3460	1.6	4840				
							12	8390	7930	7800	7620	23	10660				
							1.2	4900	4630	4540	4450	2.0	6230				
							17	10790	10200	10000	9800	29	13720				
							1.6	6000	5670	5560	5450	2.4	7630				
							23	13220	12490	12250	12000	35	16810				
							1.8	6300	5840	5840	5730	2.6	8020				
							26	13880	12860	12860	12620	38	17670				
							2.0	6600	6120	6120	6000	2.8	8400				
							29	14540	13480	13480	13220	41	18500				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Tractor Application				Cyclic Operation					
		mm	mm					mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in					in	in	in	psi	6	12	19	25 - 40	psi	6
VF520/ 85R42	DW18L	536 21.1	1955 77.0	876 34.5	5804 228.5	174D	0.6	3470	3280	3210	3150	1.4	4410				
							9	7640	7220	7070	6940	20	9710				
							0.8	3990	3780	3700	3630	1.6	5080				
							12	8790	8330	8150	8000	23	11190				
							1.2	5140	4860	4760	4670	2.0	6540				
							17	11320	10700	10480	10290	29	14410				
							1.6	6270	5930	5810	5700	2.4	7980				
							23	13810	13060	12800	12560	35	17580				
							1.8	6600	6240	6120	6000	2.6	8400				
							26	14540	13740	13480	13220	38	18500				
							2.8	7370	6970	6830	6700	3.6	9380				
							41	16230	15350	15040	14760	52	20660				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)										
								Speed,km/h(mph)										
		SW	OD					Tractor Application				CFO						
		mm	mm					mm	mm	mm	bar	10	20	30	40 - 65	bar	15	30
		in	in					in	in	in	psi	6	12	19	25 - 40	psi	9	19
VF520/ 85R46 CFO	DW18L	536 21.1	2052 80.8	925 36.4	5931 233.5	179D	0.6	3580	3380	3320	3250	0.6	8510	7880				
							9	7890	7440	7310	7160	9	18740	17360				
							0.8	4130	3900	3830	3750	0.8	8510	7880				
							12	9100	8590	8440	8260	12	18740	17360				
							1.2	5360	5070	4970	4875	1.2	7560	6340				
							17	11810	11170	10950	10740	17	16650	13960				
							1.6	6600	6240	6120	6000	1.6	9300	7800				
							23	14540	13740	13480	13220	23	20480	17180				
							2.0	7150	6760	6630	6500	2.0	10080	8450				
							29	15750	14890	14600	14320	29	22200	18610				
							2.8	8530	8060	7910	7750	2.8	12010	10080				
							41	18790	17750	17420	17070	41	26450	22200				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application				Cyclic Operation		
		mm	mm					10	20	30	40 - 65	bar	10	
		in	in					psi	6	12	19	25 - 40	psi	6
VF540/ 65R30 NRO	DW20B DW18L DW16B (NRO)	550 21.7	1464 57.6	641 25.2	4323 170.2	158D	0.6	2400	2270	2220	2180	1.4	3050	
							9	5290	5000	4890	4800	20	6720	
							0.8	2780	2630	2580	2530	1.6	3540	
							12	6120	5790	5680	5570	23	7800	
							1.2	3580	3380	3320	3250	2.0	4550	
							17	7890	7440	7310	7160	29	10020	
							1.4	3920	3700	3630	3560	2.2	4980	
							20	8630	8150	8000	7840	32	10970	
							1.6	4240	4010	3940	3860	2.4	5400	
							23	9340	8830	8680	8500	35	11890	
							2.0	4630	4420	4340	4250	2.8	5950	
							29	10200	9740	9560	9360	41	13110	

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)										
								Speed,km/h(mph)										
		SW	OD					Tractor Application				CFO						
		mm	mm					mm	mm	mm	bar	10	20	30	40 - 65	bar	15	30
		in	in					in	in	in	psi	6	12	19	25 - 40	psi	9	19
VF580/ 80R34 CFO	DW20L DW19L DW21L	590 23.2	1795 70.7	803 31.6	5301 208.7	178D	0.6	3470	3280	3210	3150	0.6	5213	3495				
							9	7640	7220	7070	6940	9	11480	7700				
							0.8	4130	3900	3830	3750	0.8	5813	4095				
							12	9100	8590	8440	8260	12	12800	9020				
							1.2	5230	4940	4850	4750	1.2	7365	6175				
							17	11520	10880	10680	10460	17	16220	13600				
							1.4	5830	5510	5410	5300	1.4	8215	6890				
							20	12840	12140	11920	11670	20	18090	15180				
							2.0	6930	6550	6430	6300	2.0	9765	8190				
							29	15260	14430	14160	13880	29	21510	18040				
							2.8	8250	7800	7650	7500	2.8	11625	8190				
							41	18170	17180	16850	16520	41	25610	18040				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Tractor Application				Cyclic Operation					
		mm	mm					mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in					in	in	in	psi	6	12	19	25 - 40	psi	6
VF580/ 85R42	DW18B DW20B DW21B	585 23.0	2050 80.7	898 35.4	6054 238.3	183D	0.6	4810	4550	4460	4375	1.4	6130				
							9	10590	10020	9820	9640	20	13500				
							0.8	4550	4420	4340	4250	1.6	5950				
							12	10020	9740	9560	9360	23	13110				
							1.2	6000	5670	5560	5450	2.0	7630				
							17	13220	12490	12250	12000	29	16810				
							1.6	7370	6970	6830	6700	2.4	9380				
							23	16230	15350	15040	14760	35	20660				
							2.8	9630	9100	8930	8750	3.6	12250				
41	21210	20040	19670	19270	52	26980											

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Tractor Application				Cyclic Operation					
		mm	mm					mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in					in	in	in	psi	6	12	19	25 - 40	psi	6
VF600/ 60R28 NRO	DW20B DW21B DW18L (NR O)	597 23.5	1431 56.3	623 24.5	4226 166.4	157D	0.6	2460	2330	2280	2240	1.4	3140				
							9	5420	5130	5020	4930	20	6920				
							0.8	2920	2760	2700	2650	1.6	3710				
							12	6430	6080	5950	5840	23	8170				
							1.2	3690	3480	3420	3350	2.0	4690				
							17	8130	7670	7530	7380	29	10330				
							1.4	4130	3900	3830	3750	2.2	5250				
							20	9100	8590	8440	8260	32	11560				
							1.6	4540	4290	4210	4125	2.4	5780				
							23	10000	9450	9270	9090	35	12730				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Tractor Application				Cyclic Operation					
		mm	mm					mm	mm	mm	bar	10	20	30	40 – 65	bar	10
		in	in					in	in	in	psi	6	12	19	25 – 40	psi	6
VF600/ 60R30	DW20B DW21B	595 23.4	1482 58.3	648 25.5	4390 172.8	162D	0.6	2530	2390	2350	2300	1.4	3220				
							9	5570	5260	5180	5070	20	7090				
							0.8	3000	2830	2780	2725	1.6	3820				
							12	6610	6230	6120	6000	23	8410				
							1.0	3380	3200	3140	3075	1.8	4310				
							15	7440	7050	6920	6770	26	9490				
							1.2	3800	3590	3520	3450	2.0	4830				
							17	8370	7910	7750	7600	29	10640				
							1.4	4260	4030	3950	3875	2.2	5430				
							20	9380	8880	8700	8540	32	11960				
							2.0	5230	4940	4850	4750	2.8	6650				
							29	11520	10880	10680	10460	41	14650				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Tractor Application				Cyclic Operation					
		mm	mm					mm	mm	mm	bar	10	20	30	40 – 65	bar	10
		in	in					in	in	in	psi	6	12	19	25 – 40	psi	6
VF600/ 60R34	DW20B DW21B DW18B (NRO)	595 23.4	1595 62.8	703 27.7	4725 186.0	160D	0.6	2670	2530	3250	2430	1.4	3400				
							9	5880	5570	7160	5350	20	7490				
							0.8	3190	3020	3250	2900	1.6	4060				
							12	7030	6650	7160	6390	23	8940				
							1.2	4020	3800	4125	3650	2.0	5110				
							17	8850	8370	9090	8040	29	11260				
							1.4	4540	4290	5150	4125	2.2	5780				
							20	10000	9450	11340	9090	32	12730				
							1.6	4950	4680	4590	4500	2.4	6300				
							23	10900	10310	10110	9910	35	13880				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Tractor Application				Cyclic Operation					
		mm	mm					mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in					in	in	in	psi	6	12	19	25 - 40	psi	6
VF600/ 65R28 NRO	DW21B DW20B DW18B (NRO)	597 23.5	1491 58.7	645 25.4	4403 173.3	163D	0.6	2750	2600	2550	2500	1.4	3500				
							9	6060	5730	5620	5510	20	7710				
							0.8	3180	3010	2950	2890	1.6	4050				
							12	7000	6630	6500	6370	23	8920				
							1.2	4090	3870	3790	3720	2.0	5210				
							17	9010	8520	8350	8190	29	11480				
							1.4	4480	4230	4150	4070	2.2	5700				
							20	9870	9320	9140	8960	32	12560				
							1.6	4850	4590	4500	4410	2.4	6170				
							23	10680	10110	9910	9710	35	13590				
							2.0	5360	5070	4970	4875	2.8	6830				
							29	11810	11170	10950	10740	41	15040				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Tractor Application				Cyclic Operation					
		mm	mm					mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in					in	in	in	psi	6	12	19	25 - 40	psi	6
VF600/ 70R30	DW21L DW20L	603 23.7	1602 63.1	692 27.2	4731 186.3	170D	0.6	3080	2910	2860	2800	1.4	3920				
							9	6780	6410	6300	6170	20	8630				
							0.8	3610	3410	3350	3280	1.6	4590				
							12	7950	7510	7380	7220	23	10110				
							1.2	4640	4390	4300	4220	2.0	5910				
							17	10220	9670	9470	9300	29	13020				
							1.6	5670	5360	5250	5150	2.4	7210				
							23	12490	11810	11560	11340	35	15880				
							2.0	6230	5890	5770	5660	2.8	7920				
							29	13720	12970	12710	12470	41	17440				
							2.4	6600	6240	6120	6000	3.2	8400				
							35	14540	13740	13480	13220	46	18500				

FEATURES AND BENEFITS

Stepped lug tip

Increase the grip
and reducing the
tractor slip



Extra wide tread

Higher footprint
which gives
better stability



Rounded shoulder

Provides less soil
damage & better grip



Lug base tie bar

Additional support to
lugs and also helps to
remove mud from lugs



50° lug angle at centre

Smoother road
driving comfort, less
noise and vibration



Higher NSD

Provides better
grip and high
traction



FARMAX HPT

TRA CODE : R-1W



FARMAX HPT

Size	Rim	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
		SW	OD					Speed,km/h(mph)							
								Tractor Application							
								mm	mm	mm	mm	mm	mm	mm	mm
480/80 R50	DW16L DW15L DW14L	485 19.1	2045 80.5	953 37.5	6039 237.8	159D 62A8	0.8	5290	3450	2830	2650	2520	2420	2300	
							12	11650	7600	6230	5840	5550	5330	5070	
							1.2	7070	4610	3780	3540	3370	3230	3075	
							17	15570	10150	8330	7800	7420	7110	6770	
							1.8	8510	5550	4550	4260	4050	3890	3700	
							26	18740	12220	10020	9380	8920	8570	8150	
							2.0	8920	5820	4470	4460	4250	4070	3880	
							29	19650	12820	9850	9820	9360	8960	8550	
							2.4	10060	6560	5380	5030	4790	4590	4375	
							35	22160	14450	11850	11080	10550	10110	9640	
Size	Rim	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
		SW	OD					Speed,km/h(mph)							
								Tractor Application							
								mm	mm	mm	mm	mm	mm	mm	mm
480/80 R50	DW16L DW15L DW14L	485 19.1	2045 80.5	953 37.5	6039 237.8	165D 68A8	0.8	5290	3450	2830	2650	2520	2420	2300	
							12	11650	7600	6230	5840	5550	5330	5070	
							1.6	8630	5630	4610	4310	4110	3940	3750	
							23	19010	12400	10150	9490	9050	8680	8260	
							2.4	10060	6560	5380	5030	4790	4590	4375	
							35	22160	14450	11850	11080	10550	10110	9640	
							2.8	10950	7140	5850	5470	5210	5000	4760	
							41	24120	15730	12890	12050	11480	11010	10480	
							3.2	11850	7730	6330	5920	5640	5410	5150	
							46	26100	17030	13940	13040	12420	11920	11340	
Size	Rim	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
		SW	OD					Speed,km/h(mph)							
								Tractor Application							
								mm	mm	mm	mm	mm	mm	mm	mm
480/80 R50/3	DW16L DW15L DW14L	485 19.1	2060 81.1	959 37.8	6213 244.6	176D 79A8	0.8	5290	3450	2830	2650	2520	2420	2300	
							12	11650	7600	6230	5840	5550	5330	5070	
							1.6	8630	5630	4610	4310	4110	3940	3750	
							23	19010	12400	10150	9490	9050	8680	8260	
							3.0	11410	7440	6100	5700	5430	5210	4960	
							44	25130	16390	13440	12560	11960	11480	10930	
							4.0	13340	8700	7130	6670	6350	6090	5800	
							58	29380	19160	15700	14690	13990	13410	12780	
							5.0	16330	10650	8730	8170	7770	7460	7100	
							73	35970	23460	19230	18000	17110	16430	15640	

Size	Rim	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi		6	12	19	25	31	40
600/65 R28	DW20B W18L	615 24.2	1500 59.1	679 26.7	4477 176.3	154D 57A8	0.8	4740	3090	2530	2370	2260	2160	2060
							12	10440	6810	5570	5220	4980	4760	4540
							1.2	6100	3980	3260	3050	2900	2780	2650
							17	13440	8770	7180	6720	6390	6120	5840
							1.8	7710	5030	4120	3850	3670	3520	3350
							26	16980	11080	9070	8480	8080	7750	7380
							2.0	8170	5330	4370	4080	3890	3730	3550
							29	18000	11740	9630	8990	8570	8220	7820
							2.2	8400	5480	4490	4200	4000	3830	3650
							32	18500	12070	9890	9250	8810	8440	8040
							2.4	8630	5630	4610	4310	4110	3940	3750
35	19010	12400	10150	9490	9050	8680	8260							

Size	Rim	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	psi	6		12	19	25	31	40	
600/70 R28	DW20B DW18L	610 24.0	1551 61.1	700 27.6	4629 182.2	157D 60A8	0.8	5290	3450	2830	2650	2520	2420	2300
							12	11650	7600	6230	5840	5550	5330	5070
							1.2	6670	4350	3570	3340	3180	3050	2900
							17	14690	9580	7860	7360	7000	6720	6390
							1.6	8170	5330	4370	4080	3890	3730	3550
							23	18000	11740	9630	8990	8570	8220	7820
							2.0	8910	5810	4770	4460	4240	4070	3875
							29	19630	12800	10510	9820	9340	8960	8540
							2.4	9490	6190	5070	4740	4520	4330	4125
35	20900	13630	11170	10440	9960	9540	9090							

Size	Rim	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	psi	6		12	19	25	31	40	
600/70 R30	DW20B DW18L	610 24.0	1624 63.9	726 28.6	4781 188.2	158D 61A8	0.8	5430	3540	2900	2710	2580	2480	2360
							12	11960	7800	6390	5970	5680	5460	5200
							1.2	6900	4500	3690	3450	3290	3150	3000
							17	15200	9910	8130	7600	7250	6940	6610
							1.8	8910	5810	4770	4460	4240	4070	3875
							26	19630	12800	10510	9820	9340	8960	8540
							2.0	9200	6000	4920	4600	4380	4200	4000
							29	20260	13220	10840	10130	9650	9250	8810
							2.4	9780	6380	5230	4890	4650	4460	4250
35	21540	14050	11520	10770	10240	9820	9360							

Size	Rim	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi		6	12	19	25	31	40
600/70 R30	DW20B DW18L	610 24.0	1624 63.9	726 28.6	4781 188.2	168D 71A8	0.8	5430	3540	2900	2710	2580	2480	2360
							12	11960	7800	6390	5970	5680	5460	5200
							1.2	6900	4500	3690	3450	3290	3150	3000
							17	15200	9910	8130	7600	7250	6940	6610
							1.8	8910	5810	4770	4460	4240	4070	3875
							26	19630	12800	10510	9820	9340	8960	8540
							2.0	9200	6000	4920	4600	4380	4200	4000
							29	20260	13220	10840	10130	9650	9250	8810
							2.4	9780	6380	5230	4890	4650	4460	4250
							35	21540	14050	11520	10770	10240	9820	9360
							3.8	12880	8400	6890	6440	6130	5880	5600
55	28370	18500	15180	14190	13500	12950	12330							

Size	Rim	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi		6	12	19	25	31	40
600/70 R34	DW20B DW18L	610 24.0	1702 67.0	767 30.2	5110 201.2	160D 63A8	0.8	5750	3750	3080	2880	2740	2630	2500
							12	12670	8260	6780	6340	6040	5790	5510
							1.2	7250	4730	3870	3620	3450	3310	3150
							17	15970	10420	8520	7970	7600	7290	6940
							1.8	9490	6190	5070	4740	4520	4330	4125
							26	20900	13630	11170	10440	9960	9540	9090
							2.0	9780	6380	5230	4890	4650	4460	4250
							29	21540	14050	11520	10770	10240	9820	9360
							2.2	10060	6560	5380	5030	4790	4590	4375
							32	22160	14450	11850	11080	10550	10110	9640
							2.4	10350	6750	5540	5180	4930	4730	4500
							35	22800	14870	12200	11410	10860	10420	9910

Size	Rim	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi		6	12	19	25	31	40
650/65 R34	DW20B DW21 DW23B	645 25.4	1710 67.3	779 30.7	5104 200.9	161D 64A8	0.8	5920	3860	3170	2960	2820	2700	2575
							12	13040	8500	6980	6520	6210	5950	5670
							1.2	7480	4880	4000	3740	3560	3410	3250
							17	16480	10750	8810	8240	7840	7510	7160
							1.8	9490	6190	5080	4740	4520	4330	4125
							26	20900	13630	11190	10440	9960	9540	9090
							2.0	10060	6560	5380	5030	4790	4590	4375
							29	22160	14450	11850	11080	10550	10110	9640
							2.2	10350	6750	5540	5180	4930	4730	4500
							32	22800	14870	12200	11410	10860	10420	9910
							2.4	10640	6940	5690	5320	5060	4860	4625
35	23440	15290	12530	11720	11150	10700	10190							

Size	Rim	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	psi	6		12	19	25	31	40	
650/75 R38	DW21B DW20B DW23B	645 25.4	1941 76.4	873 34.4	5793 228.1	169D 72A8	0.8	7250	4730	3870	3620	3450	3310	3150
							12	15970	10420	8520	7970	7600	7290	6940
							1.2	9200	6000	4920	4600	4380	4200	4000
							17	20260	13220	10840	10130	9650	9250	8810
							1.6	11210	7310	6000	5610	5340	5120	4875
							23	24690	16100	13220	12360	11760	11280	10740
							2.0	12540	8180	6700	6270	5970	5720	5450
							29	27620	18020	14760	13810	13150	12600	12000
							2.4	13340	8700	7490	6670	6350	6090	5800
35	29380	19160	16500	14690	13990	13410	12780							

Size	Rim	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	psi	6		12	19	25	31	40	
650/85 R38	DW23B DW21B DW20B	675 26.6	2071 81.5	947 37.3	6181 243.3	170D 73A8	0.8	4080	5330	4370	4080	3890	3730	3550
							12	8990	11740	9630	8990	8570	8220	7820
							1.2	5180	6750	5540	5180	4930	4730	4500
							17	11410	14870	12200	11410	10860	10420	9910
							1.6	6270	8180	6700	6270	5970	5720	5450
							23	13810	18020	14760	13810	13150	12600	12000
							1.8	6440	8180	6700	6270	5970	5720	5450
							26	14190	18020	14760	13810	13150	12600	12000
							2.1	6900	9000	7750	6900	6570	6300	6000
30	15200	19820	17070	15200	14470	13880	13220							

Size	Rim	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	psi	6	12		19	25	31	40		
650/85 R38	DW23B DW21B DW20B	675 26.6	2071 81.5	947 37.3	6181 243.3	173D 76A8	0.8	4080	5330	4370	4080	3890	3730	3550
							12	8990	11740	9630	8990	8570	8220	7820
							1.0	4600	6000	4920	4600	4380	4200	4000
							15	10130	13220	10840	10130	9650	9250	8810
							1.4	5750	7500	6150	5750	5480	5250	5000
							20	12670	16520	13550	12670	12070	11560	11010
							1.6	6270	8180	6700	6270	5970	5720	5450
							23	13810	18020	14760	13810	13150	12600	12000
							2.4	7480	9750	8400	7480	7120	6830	6500
35	16480	21480	18500	16480	15680	15040	14320							

Size	Rim	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
								mm	mm	mm	mm	mm	mm	Static
in	in	in	in	in	in	psi		6	12	19	25	31	40	
710/70 R38	DW23B DW25B	716 28.2	1985 78.1	891 35.1	5856 230.6	171D 74A8	0.8	7710	5030	4120	3850	3670	3520	3350
							12	16980	11080	9070	8480	8080	7750	7380
							1.0	8910	5810	4770	4460	4240	4070	3875
							15	19630	12800	10510	9820	9340	8960	8540
							1.2	10060	6560	5380	5030	4790	4590	4375
							17	22160	14450	11850	11080	10550	10110	9640
							1.4	11210	7310	6000	5610	5340	5120	4875
							20	24690	16100	13220	12360	11760	11280	10740
							1.6	12190	7950	6520	6100	5800	5570	5300
							23	26850	17510	14360	13440	12780	12270	11670
							2.0	13340	8700	7130	6670	6350	6090	5800
							29	29380	19160	15700	14690	13990	13410	12780
							2.4	14150	9230	7950	7070	6730	6460	6150
							35	31170	20330	17510	15570	14820	14230	13550

Size	Rim	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
								mm	mm	mm	mm	mm	mm	Static
in	in	in	in	in	in	psi		6	12	19	25	31	40	
710/70 R38	DW23B DW25B	716 28.2	1985 78.1	891 35.1	5856 230.6	178D 81A8	0.8	7710	5030	4120	3850	3670	3520	3350
							12	16980	11080	9070	8480	8080	7750	7380
							1.0	8910	5810	4770	4460	4240	4070	3875
							15	19630	12800	10510	9820	9340	8960	8540
							1.2	10060	6560	5380	5030	4790	4590	4375
							17	22160	14450	11850	11080	10550	10110	9640
							1.4	11210	7310	6000	5610	5340	5120	4875
							20	24690	16100	13220	12360	11760	11280	10740
							1.6	12190	7950	6520	6100	5800	5570	5300
							23	26850	17510	14360	13440	12780	12270	11670
							2.0	13340	8700	7130	6670	6350	6090	5800
							29	29380	19160	15700	14690	13990	13410	12780
							2.4	14150	9230	7950	7070	6730	6460	6150
							35	31170	20330	17510	15570	14820	14230	13550
							3.4	17250	11250	9230	8630	8210	7880	7500
							49	38000	24780	20330	19010	18080	17360	16520

Size	Rim	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
		Tractor Application												
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi		6	12	19	25	31	40
710/70 R42	DW23B DW25B	716 28.2	2075 81.7	942 37.1	6160 242.5	173D 76A8	0.8	8170	5330	4370	4080	3890	3730	3550
							12	18000	11740	9630	8990	8570	8220	7820
							1.2	10350	6750	5540	5180	4930	4730	4500
							17	22800	14870	12200	11410	10860	10420	9910
							1.6	12880	8400	6890	6440	6130	5880	5600
							23	28370	18500	15180	14190	13500	12950	12330
							2.0	14150	9230	7560	7070	6730	6460	6150
							29	31170	20330	16650	15570	14820	14230	13550
							2.4	14950	9750	8400	7480	7120	6830	6500
35	32930	21480	18500	16480	15680	15040	14320							

Size	Rim	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	psi	6		12	19	25	31	40	
710/70 R42	DW23B DW25B	716 28.2	2075 81.7	942 37.1	6160 242.5	176D 79A8	0.8	8170	5330	4370	4080	3890	3730	3550
							12	18000	11740	9630	8990	8570	8220	7820
							1.2	10350	6750	5540	5180	4930	4730	4500
							17	22800	14870	12200	11410	10860	10420	9910
							1.6	12880	8400	6890	6440	6130	5880	5600
							23	28370	18500	15180	14190	13500	12950	12330
							2.0	14150	9230	7560	7070	6730	6460	6150
							29	31170	20330	16650	15570	14820	14230	13550
							2.4	14950	9750	8400	7480	7120	6830	6500
							35	32930	21480	18500	16480	15680	15040	14320
							2.8	16330	10650	8730	8170	7770	7460	7100
							41	35970	23460	19230	18000	17110	16430	15640

Size	Rim	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	psi	6		12	19	25	31	40	
710/75 R42	DW23B DW21B DW24B DW25B	725 28.5	2140 84.3	976 38.4	6387 251.5	181D 84A8	0.8	8630	5630	4610	4310	4110	3940	3750
							12	19010	12400	10150	9490	9050	8680	8260
							1.4	12190	7950	6520	6100	5800	5570	5300
							20	26850	17510	14360	13440	12780	12270	11670
							2.2	15640	10200	8360	7820	7450	7140	6800
							32	34450	22470	18410	17220	16410	15730	14980
							2.8	17250	11250	9230	8630	8210	7880	7500
							41	38000	24780	20330	19010	18080	17360	16520
							3.2	18980	12380	10650	9490	9030	8660	8250
46	41810	27270	23460	20900	19890	19070	18170							

Size	Rim	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	psi	6		12	19	25	31	40	
710/75 R42	DW23B DW21B DW24B DW25B	725 28.5	2140 84.3	976 38.4	6387 251.5	175D 78A8	0.8	8630	5630	4610	4310	4110	3940	3750
							12	19010	12400	10150	9490	9050	8680	8260
							1.2	11210	7310	6000	5610	5340	5120	4875
							17	24690	16100	13220	12360	11760	11280	10740
							1.6	13800	9000	7380	6900	6570	6300	6000
							23	30400	19820	16260	15200	14470	13880	13220
							2.0	14950	9750	8000	7480	7120	6830	6500
							29	32930	21480	17620	16480	15680	15040	14320
							2.4	15870	10350	8920	7940	7560	7250	6900
							35	34960	22800	19650	17490	16650	15970	15200

Size	Rim	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	psi	6		12	19	25	31	40	
800/70 R38	DW27B DW25B	820 32.3	2089 82.2	927 36.5	6110 240.6	178D 81A8	0.8	9490	6190	5070	4740	4520	4330	4125
							12	20900	13630	11170	10440	9960	9540	9090
							1.2	12190	7950	6520	6100	5800	5570	5300
							17	26850	17510	14360	13440	12780	12270	11670
							1.6	14950	9750	8000	7480	7120	6830	6500
							23	32930	21480	17620	16480	15680	15040	14320
							2.0	16330	10650	8730	8170	7770	7460	7100
							29	35970	23460	19230	18000	17110	16430	15640
							2.4	17250	11250	9690	8630	8210	7880	7500
35	38000	24780	21340	19010	18080	17360	16520							

Size	Rim	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	psi	6	12		19	25	31	40		
800/70 R38	DW27B DW25B	820 32.3	2085 82.1	925 36.4	6223 245.0	187D 90A8	0.8	9490	6190	5070	4740	4520	4330	4125
							12	20900	13630	11170	10440	9960	9540	9090
							1.2	12190	7950	6520	6100	5800	5570	5300
							17	26850	17510	14360	13440	12780	12270	11670
							2.0	16330	10650	8730	8170	7770	7460	7100
							29	35970	23460	19230	18000	17110	16430	15640
							3.0	19550	12750	10460	9780	9310	8930	8500
							44	43060	28080	23040	21540	20510	19670	18720
							4.0	22430	14630	12600	11210	10680	10240	9750
58	49410	32220	27750	24690	23520	22560	21480							

Size	Rim	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	psi	6	12		19	25	31	40		
850/80 R38	DW27B	852 33.5	2291 90.2	1007 39.6	6838 269.2	180D 83A8	0.8	11850	7730	6330	5920	5640	5410	5150
							12	26100	17030	13940	13040	12420	11920	11340
							1.0	13340	8700	7130	6670	6350	6090	5800
							15	29380	19160	15700	14690	13990	13410	12780
							1.2	14950	9750	8000	7480	7120	6830	6500
							17	32930	21480	17620	16480	15680	15040	14320
							1.4	16790	10950	8980	8400	7990	7670	7300
							20	36980	24120	19780	18500	17600	16890	16080
							1.6	18400	12000	10330	9200	8760	8400	8000
23	40530	26430	22750	20260	19300	18500	17620							

SPRAYERS



FEATURES AND BENEFITS

Higher NSD
Longer life



Advanced VF technology
40% more load
carrying capability than
standard radial

Stepped lug design
Better grip & traction



Advanced
lug geometry
Better roadability



Rounded shoulder
Provides less
soil and crop damage



SPRAYMAX

TRA CODE : R-1/R-1W



SPRAYMAX

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application				Cyclic Operation	
		mm	mm					10	20	30	40 - 65	bar	10
		in	in	in	in	in	psi	6	12	19	25 - 40	psi	6
VF320/ 85R38	DW10 W11	323 12.7	1509 59.4	693 27.3	4527 178.2	155D	0.8	1820	1720	1680	1650	1.6	2310
							12	4010	3790	3700	3630	23	5090
							1.2	2330	2200	2160	2120	2	2970
							17	5130	4850	4760	4670	29	6540
							1.6	2920	2760	2700	2650	2.4	3710
							23	6430	6080	5950	5840	35	8170
							2.4	3380	3200	3140	3075	3.2	4310
							35	7440	7050	6920	6770	46	9490
							3.6	4260	4030	3950	3875	4.4	5430
							52	9380	8880	8700	8540	64	11960

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application				Cyclic Operation	
		mm	mm					10	20	30	40 - 65	bar	10
		in	in	in	in	in	psi	6	12	19	25 - 40	psi	6
VF320/ 90R42	W11 W10	323 12.7	1643 64.7	756 29.8	4929 194.1	163D	0.8	2040	1920	1890	1850	1.6	2590
							12	4490	4230	4160	4070	23	5700
							1.2	2600	2450	2410	2360	2.0	3300
							17	5730	5400	5310	5200	29	7270
							1.6	3190	3020	2960	2900	2.4	4060
							23	7030	6650	6520	6390	35	8940
							2.4	3690	3480	3420	3350	3.2	4690
							35	8130	7670	7530	7380	46	10330
							4.4	5360	5070	4970	4875	5.2	6830
							64	11810	11170	10950	10740	75	15040

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application				Cyclic Operation	
		mm	mm					10	20	30	40 - 65	bar	10
		in	in	in	in	in	psi	6	12	19	25 - 40	psi	6
VF320/ 90R50	DW11 W10	323 12.7	1643 64.7	858 33.8	5544 218.3	169D	0.8	2200	2080	2040	2000	1.6	2800
							12	4850	4580	4490	4410	23	6170
							1.2	2830	2680	2630	2575	2.0	3610
							17	6230	5900	5790	5670	29	7950
							1.6	3470	3280	3210	3150	2.4	4410
							23	7640	7220	7070	6940	35	9710
							2.4	4130	3900	3830	3750	3.2	5250
							35	9100	8590	8440	8260	46	11560
							3.2	4810	4550	4460	4375	4.0	6130
							46	10590	10020	9820	9640	58	13500
							4.8	6380	6030	5920	5800	5.6	8120
							70	14050	13280	13040	12780	81	17890

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Mixed Application				Cyclic Operation					
		mm	mm					mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in					in	in	in	psi	6	12	19	25 - 40	psi	6
VF320/ 90R54	DW11 W10	323 12.7	1948 76.7	908 35.7	5844 230.1	168D	0.8	2330	2200	2160	2120	1.6	2970				
							12	5130	4850	4760	4670	23	6540				
							1.2	3000	2830	2780	2725	2.0	3820				
							17	6610	6230	6120	6000	29	8410				
							1.6	3690	3480	3420	3350	2.4	4690				
							23	8130	7670	7530	7380	35	10330				
							2.0	4020	3800	3720	3650	2.8	5110				
							29	8850	8370	8190	8040	41	11260				
							3.0	4810	4550	4460	4375	3.8	6130				
							44	10590	10020	9820	9640	55	13500				
							4.4	6160	5820	5710	5600	5.2	7840				
							64	13570	12820	12580	12330	75	17270				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Mixed Application				Cyclic Operation					
		mm	mm					mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in					in	in	in	psi	6	12	19	25 - 40	psi	6
VF380/ 105R50	W13 W12	383 15.1	2050 80.7	944 37.2	6150 242.1	179D	0.8	3230	3060	3000	2940	1.6	4120				
							12	7110	6740	6610	6480	23	9070				
							1.2	4160	3930	3860	3780	2.0	5290				
							17	9160	8660	8500	8330	29	11650				
							1.6	5080	4800	4710	4620	2.4	6470				
							23	11190	10570	10370	10180	35	14250				
							2.4	5940	5620	5510	5400	3.2	7560				
							35	13080	12380	12140	11890	46	16650				
							3.4	7270	6870	6740	6610	4.2	9250				
							49	16010	15130	14850	14560	61	20370				
							4.4	8530	8060	7910	7750	5.2	10850				
							64	18790	17750	17420	17070	75	23900				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Mixed Application				Cyclic Operation					
		mm	mm					mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in					in	in	in	psi	6	12	19	25 - 40	psi	6
VF380/ 05R54	W13 W12	383 15.1	2150 84.6	986 38.8	6450 253.9	168D	0.8	3370	3180	3120	3060	1.6	4280				
							12	7420	7000	6870	6740	23	9430				
							1.2	4320	4090	4010	3930	2.0	5500				
							17	9520	9010	8830	8660	29	12110				
							1.6	5290	5000	4910	4810	2.4	6730				
							23	11650	11010	10810	10590	35	14820				
							2.0	5810	5490	5390	5280	2.8	7390				
							29	12800	12090	11870	11630	41	16280				
							2.2	6020	5690	5580	5470	3.0	7660				
							32	13260	12530	12290	12050	44	16870				
							2.4	6160	5820	5710	5600	3.2	7840				
							35	13570	12820	12580	12330	46	17270				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application				Cyclic Operation	
		mm	mm					10	20	30	40 - 65	bar	10
		in	in	in	in	in	psi	6	12	19	25 - 40	psi	6
VF380/ 05R54	W13 W12	383 15.1	2150 84.6	986 38.8	6450 253.9	180D	0.8	3380	3200	3140	3075	1.6	4310
							12	7440	7050	6920	6770	23	9490
							1.2	4260	4030	3950	3875	2.0	5430
							17	9380	8880	8700	8540	29	11960
							1.6	5230	4940	4850	4750	2.4	6650
							23	11520	10880	10680	10460	35	14650
							2.4	6160	5820	5710	5600	3.2	7840
							35	13570	12820	12580	12330	46	17270
							3.4	7370	6970	6830	6700	4.2	9380
							49	16230	15350	15040	14760	61	20660
							4.4	8800	8320	8160	8000	5.2	11200
							64	19380	18330	17970	17620	75	24670

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application				Cyclic Operation	
		mm	mm					10	20	30	40 - 65	bar	10
		in	in	in	in	in	psi	6	12	19	25 - 40	psi	6
VF380/ 80R38	DW12	383 15.1	1573 61.9	717 28.2	4719 185.8	167D	0.8	2240	2120	2080	2040	1.6	2860
							12	4930	4670	4580	4490	23	6300
							1.2	2890	2740	2680	2630	2.0	3680
							17	6370	6040	5900	5790	29	8110
							1.6	3530	3340	3270	3210	2.4	4490
							23	7780	7360	7200	7070	35	9890
							2.0	3880	3670	3600	3530	2.8	4940
							29	8550	8080	7930	7780	41	10880
							3.0	4710	4450	4370	4280	3.8	5990
							44	10370	9800	9630	9430	55	13190
							4.4	6000	5670	5560	5450	5.2	7630
							64	13220	12490	12250	12000	75	16810

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application				Cyclic Operation	
		mm	mm					10	20	30	40 - 65	bar	10
		in	in	in	in	in	psi	6	12	19	25 - 40	psi	6
VF380/ 90R46	W13 W12	383 15.1	1852 72.9	858 33.8	5586 219.9	173D	0.8	2730	2580	2530	2480	1.6	3470
							12	6010	5680	5570	5460	23	7640
							1.4	3910	3690	3620	3550	2.2	4970
							20	8610	8130	7970	7820	32	10950
							2.8	5500	5200	5100	5000	3.6	7000
							41	12110	11450	11230	11010	52	15420
							3.6	6330	5980	5870	5750	4.4	8050
							52	13940	13170	12930	12670	64	17730
							4.0	6670	6300	6180	6060	4.8	8480
							58	14690	13880	13610	13350	70	18680
							4.4	7150	6760	6630	6500	5.2	9100
							64	15750	14890	14600	14320	75	20040

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Mixed Application				Cyclic Operation					
		mm	mm					mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in					in	in	in	psi	6	12	19	25 - 40	psi	6
VF380/ 90R50	W13 W12	383 15.1	1954 76.9	909 35.8	5850 230.3	175D	0.8	2850	2690	2640	2590	1.6	3630				
							12	6280	5930	5810	5700	23	8000				
							1.4	4080	3860	3780	3710	2.2	5190				
							20	8990	8500	8330	8170	32	11430				
							2.8	5740	5430	5320	5220	3.6	7310				
							41	12640	11960	11720	11500	52	16100				
							3.6	6600	6240	6120	6000	4.4	8400				
							52	14540	13740	13480	13220	64	18500				
							4.0	6960	6580	6460	6330	4.8	8860				
							58	15330	14490	14230	13940	70	19520				
							4.4	7590	7180	7040	6900	5.2	9660				
							64	16720	15810	15510	15200	75	21280				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Mixed Application				Cyclic Operation					
		mm	mm					mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in					in	in	in	psi	6	12	19	25 - 40	psi	6
VF380/ 90R54	W13 W12	383 15.1	2056 80.9	960 37.8	6201 244.1	176D	0.8	2970	2810	2750	2700	1.6	3780				
							12	6540	6190	6060	5950	23	8330				
							1.4	4250	4010	3940	3860	2.2	5400				
							20	9360	8830	8680	8500	32	11890				
							2.8	5980	5660	5550	5440	3.6	7620				
							41	13170	12470	12220	11980	52	16780				
							3.6	6880	6500	6380	6250	4.4	8750				
							52	15150	14320	14050	13770	64	19270				
							4.0	7260	6860	6730	6600	4.8	9240				
							58	15990	15110	14820	14540	70	20350				
							4.4	7810	7380	7240	7100	5.2	9940				
							64	17200	16260	15950	15640	75	21890				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
		Speed,km/h(mph)															
		SW	OD					Mixed Application				Cyclic Operation					
		mm	mm					mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in					in	in	in	psi	6	12	19	25 - 40	psi	6
VF420/ 95R50	W14L W13	419 16.5	2068 81.4	943 37.1	6204 244.3	177D	0.8	3470	3280	3210	3150	1.6	4410				
							12	7640	7220	7070	6940	23	9710				
							1.2	4400	4160	4080	4000	2.0	5600				
							17	9690	9160	8990	8810	29	12330				
							1.6	5500	5200	5100	5000	2.4	7000				
							23	12110	11450	11230	11010	35	15420				
							2.0	6000	5670	5560	5450	2.8	7630				
							29	13220	12490	12250	12000	41	16810				
							3.0	7150	6760	6630	6500	3.8	9100				
							44	15750	14890	14600	14320	55	20040				
							3.6	8030	7590	7450	7300	4.4	10220				
							52	17690	16720	16410	16080	64	22510				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Mixed Application				Cyclic Operation					
		mm	mm					mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in					in	in	in	psi	6	12	19	25 - 40	psi	6
VF480/ 80R42	DW16L DW15L	479 18.9	1850 72.8	847 33.3	5550 218.5	162D	0.8	3360	3170	3110	3050	1.6	4270				
							12	7400	6980	6850	6720	23	9410				
							1.0	3840	3630	3560	3490	1.8	4890				
							15	8460	8000	7840	7690	26	10770				
							1.2	4310	4080	4000	3920	2.0	5490				
							17	9490	8990	8810	8630	29	12090				
							1.4	4800	4530	4450	4360	2.2	6100				
							20	10570	9980	9800	9600	32	13440				
							1.6	5230	4940	4850	4750	2.6	6650				
							23	11520	10880	10680	10460	38	14650				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
		Speed,km/h(mph)											
		SW	OD	Mixed Application				Cyclic Operation					
		mm	mm	mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in	in	in	in	psi	6	12	19	25 - 40	psi	6
VF480/ 80R42	DW16L DW15L	479 18.9	1850 72.8	847 33.3	5550 218.5	176D	0.8	3360	3170	3110	3050	1.6	4270
							12	7400	6980	6850	6720	23	9410
							1.2	4320	4090	4010	3930	2.0	5500
							17	9520	9010	8830	8660	29	12110
							1.8	5350	5050	4960	4860	2.6	6800
							26	11780	11120	10930	10700	38	14980
							2.0	5800	5480	5380	5270	2.8	7380
							29	12780	12070	11850	11610	41	16260
							2.8	6770	6400	6270	6150	3.6	8610
							41	14910	14100	13810	13550	52	18960
							3.6	7810	7380	7240	7100	4.4	9940
							52	17200	16260	15950	15640	64	21890

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Mixed Application				Cyclic Operation					
		mm	mm					mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in					in	in	in	psi	6	12	19	25 - 40	psi	6
VF480/ 80R46	DW16L DW15L	479 18.9	1950 76.8	897 35.3	5838 229.8	177D	0.8	3510	3320	3250	3190	1.6	4470				
							12	7730	7310	7160	7030	23	9850				
							1.0	4020	3800	3720	3650	1.8	5110				
							15	8850	8370	8190	8040	26	11260				
							1.2	4520	4270	4190	4110	2.0	5750				
							17	9960	9410	9230	9050	29	12670				
							1.4	5020	4740	4650	4560	2.2	6380				
							20	11060	10440	10240	10040	32	14050				
							1.6	5520	5220	5120	5020	2.4	7030				
							23	12160	11500	11280	11060	35	15480				
							2.4	6460	6100	5990	5870	3.2	8220				
							35	14230	13440	13190	12930	46	18110				
							3.0	7230	6830	6700	6570	3.8	9200				
							44	15930	15040	14760	14470	55	20260				
							3.6	8030	7590	7450	7300	4.4	10220				
							52	17690	16720	16410	16080	64	22510				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Mixed Application				Cyclic Operation					
		mm	mm					mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in					in	in	in	psi	6	12	19	25 - 40	psi	6
VF480/ 80R46	DW16 DW15	479 18.9	1950 76.8	897 35.3	5838 229.8	164D	0.8	3510	3320	3250	3190	1.6	4470				
							12	7730	7310	7160	7030	23	9850				
							1.0	4020	3800	3720	3650	1.8	5110				
							15	8850	8370	8190	8040	26	11260				
							1.2	4520	4270	4190	4110	2.0	5750				
							17	9960	9410	9230	9050	29	12670				
							1.4	5020	4740	4650	4560	2.2	6380				
							20	11060	10440	10240	10040	32	14050				
							1.6	5500	5200	5100	5000	2.4	7000				
							23	12110	11450	11230	11010	35	15420				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Mixed Application				Cyclic Operation					
		mm	mm					mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in					in	in	in	psi	6	12	19	25 - 40	psi	6
VF480/ 80R50	DW16L DW15L	479 18.9	2060 81.1	951 37.4	6148 242.0	179D	0.8	3660	3460	3400	3330	1.6	4660				
							12	8060	7620	7490	7330	23	10260				
							1.2	4710	4450	4370	4280	2.0	5990				
							17	10370	9800	9630	9430	29	13190				
							2.0	6330	5980	5870	5750	2.8	8050				
							29	13940	13170	12930	12670	41	17730				
							2.8	7380	6980	6840	6710	3.6	9390				
							41	16260	15370	15070	14780	52	20680				
							3.6	8530	8060	7910	7750	4.4	10850				
							52	18790	17750	17420	17070	64	23900				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Mixed Application				Cyclic Operation					
		mm	mm					mm	mm	mm	bar	10	20	30	40 - 65	bar	10
		in	in					in	in	in	psi	6	12	19	25 - 40	psi	6
VF480/ 95R50	DW16L DW15L	480 18.9	2185 86.0	988 38.9	6555 258.1	181D	0.8	4260	4030	3950	3875	1.6	5430				
							12	9380	8880	8700	8540	23	11960				
							1.2	5500	5200	5100	5000	2.0	7000				
							17	12110	11450	11230	11010	29	15420				
							1.6	6600	6240	6120	6000	2.4	8400				
							23	14540	13740	13480	13220	35	18500				
							2.4	7810	7380	7240	7100	3.2	9940				
							35	17200	16260	15950	15640	46	21890				
							3.2	9080	8580	8420	8250	4.0	11550				
							46	20000	18900	18550	18170	58	25440				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application				Cyclic Operation	
		mm	mm				bar	10	20	30	40 - 65	bar	10
		in	in				psi	6	12	19	25 - 40	psi	6
VF480/ 95R54	DW16L DW15L	479 18.9	2284 89.9	1047 41.2	6853 269.8	180D	0.8	4390	4150	4070	3990	1.6	5590
							12	9670	9140	8960	8790	23	12310
							1.2	5640	5340	5230	5130	2.0	7180
							17	12420	11760	11520	11300	29	15810
							1.6	6900	6520	6400	6270	2.4	8780
							23	15200	14360	14100	13810	35	19340
							2.0	7580	7170	7030	6890	2.8	9650
							29	16700	15790	15480	15180	41	21260
							2.4	8060	7620	7480	7330	3.2	10260
							35	17750	16780	16480	16150	46	22600
							2.8	8800	8320	8160	8000	3.6	11200
							41	19380	18330	17970	17620	52	24670

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application				Cyclic Operation	
		mm	mm				bar	10	20	30	40 - 65	bar	10
		in	in				psi	6	12	19	25 - 40	psi	6
VF750/ 60R46	DW25B DW27B	750 29.5	2070 81.5	932 36.7	6210 244.5	189D	0.8	5090	4810	4720	4625	1.6	6480
							12	11210	10590	10400	10190	23	14270
							1.2	6600	6240	6120	6000	2.0	8400
							17	14540	13740	13480	13220	29	18500
							1.6	8030	7590	7450	7300	2.4	10220
							23	17690	16720	16410	16080	35	22510
							2.2	9350	8840	8690	8500	3.0	11900
							32	20590	19470	19140	18720	44	26210
							2.8	10450	9880	9690	9500	3.6	13300
							41	23020	21760	21340	20930	52	29300
							3.2	11330	10710	10510	10300	4.0	14420
							46	24960	23590	23150	22690	58	31760

MID & LOW HP TRACTORS



FEATURES AND BENEFITS



FARMAX R65

TRA CODE: R-1W



FARMAX

R65

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)											
								Speed,km/h(mph)											
		SW	OD					Non-Cyclic Operation					Cyclic Operation						
		mm	mm					mm	mm	mm	bar	65	Field Operation	25	40	50	bar	10	15
		in	in					in	in	in	psi	40	Field Operation	16	25	31	psi	6	9
480/65 R24	W15L W14L	479 18.9	1234 48.6	561 22.1	3644 143.5	140D	0.8	1380	1590	1640	1510	1450	1	2350	2140				
							12	3040	3500	3610	3330	3190	15	5180	4710				
							1.2	1740	2000	2060	1910	1830	1.5	2960	2700				
							17	3830	4410	4540	4210	4030	22	6520	5950				
							2	2250	2590	2670	2460	2360	2.5	3830	3490				
							29	4960	5700	5880	5420	5200	36	8440	7690				
							2.4	2500	2880	2960	2740	2630	3	4250	3880				
35	5510	6340	6520	6040	5790	44	9360	8550											

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Non-Cyclic Operation				Cyclic Operation			
		mm	mm	mm	mm	mm	bar	Field Operation	25	40	50	65	bar	10	15
		in	in	in	in	in	psi	Field Operation	16	25	31	40	psi	6	9
480/65 R24	W15L W14L	479 18.9	1234 48.6	561 22.1	3644 143.5	133D	0.8	1590	1640	1510	1450	1380	1	2350	2140
							12	3500	3610	3330	3190	3040	15	5180	4710
							1	1810	1860	1720	1650	1570	1.3	2670	2430
							15	3990	4100	3790	3630	3460	18	5880	5350
							1.4	2200	2260	2090	2010	1910	1.8	3250	2960
							20	4850	4980	4600	4430	4210	25	7160	6520
							1.6	2370	2440	2260	2160	2060	2	3500	3190
							23	5220	5370	4980	4760	4540	29	7710	7030

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)											
								Speed,km/h(mph)											
		SW	OD					Non-Cyclic Operation						Cyclic Operation					
		mm	mm					mm	mm	mm	bar	Field Operation	25	40	50	65	bar	10	15
		in	in					in	in	in	psi	Field Operation	16	25	31	40	psi	6	9
480/65 R28	W15L W14L	479 18.9	1335 52.6	606 23.9	4068 160.2	136D	0.8	1710	1770	1630	1560	1490	1.0	2530	2310				
							12	3770	3900	3590	3440	3280	15	5570	5090				
							1.0	1960	2010	1860	1790	1700	1.3	2890	2640				
							15	4320	4430	4100	3940	3740	18	6370	5810				
							1.3	2280	2350	2170	2080	1980	1.6	3370	3070				
							19	5020	5180	4780	4580	4360	24	7420	6760				
							1.6	2580	2650	2450	2350	2240	2.0	3810	3470				
							23	5680	5840	5400	5180	4930	29	8390	7640				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Non-Cyclic Operation				Cyclic Operation			
		mm	mm	mm	mm	mm	bar	Field Operation	25	40	50	65	bar	10	15
		in	in	in	in	in	psi	Field Operation	16	25	31	40	psi	6	9
480/65 R28	W15L W14L	479 18.9	1335 52.6	606 23.9	4068 160.2	142D	0.8	1710	1770	1630	1560	1490	1.0	2530	2310
							12	3770	3900	3590	3440	3280	15	5570	5090
							1.2	2170	2240	2070	1980	1890	1.5	3210	2930
							17	4780	4930	4560	4360	4160	22	7070	6450
							1.8	2760	2840	2630	2520	2400	2.3	4080	3720
							26	6080	6260	5790	5550	5290	33	8990	8190
							2.4	3050	3140	2900	2780	2650	3.0	4510	4110
							35	6720	6920	6390	6120	5840	44	9930	9050

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Non-Cyclic Operation				Cyclic Operation			
		mm	mm	mm	mm	mm	bar	Field Operation	25	40	50	65	bar	10	15
		in	in	in	in	in	psi	Field Operation	16	25	31	40	psi	6	9
540/65 R24	W16L W18L	550 21.7	1312 51.7	590 23.2	3879 152.7	140D	0.8	1920	1980	1830	1750	1670	1.0	2840	2590
							12	4230	4360	4030	3850	3680	15	6260	5700
							1.0	2190	2250	2080	2000	1900	1.3	3230	2950
							15	4820	4960	4580	4410	4190	18	7110	6500
							1.3	2540	2620	2420	2320	2210	1.6	3760	3430
							19	5590	5770	5330	5110	4870	24	8280	7560
							1.6	2880	2960	2740	2630	2500	2.0	4250	3880
							23	6340	6520	6040	5790	5510	29	9360	8550

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Non-Cyclic Operation				Cyclic Operation			
		mm	mm	mm	mm	mm	bar	Field Operation	25	40	50	65	bar	10	15
		in	in	in	in	in	psi	Field Operation	16	25	31	40	psi	6	9
540/65 R24	W16L W18L	550 21.7	1312 51.7	590 23.2	3879 152.7	146D	0.8	1920	1980	1830	1750	1670	1.0	2840	2590
							12	4230	4360	4030	3850	3680	15	6260	5700
							1.2	2430	2500	2310	2220	2110	1.5	3590	3270
							17	5350	5510	5090	4890	4650	22	7910	7200
							2.0	3110	3200	2960	2840	2700	2.5	4590	4190
							29	6850	7050	6520	6260	5950	36	10110	9230
							2.4	3450	3560	3290	3150	3000	3.0	5100	4650
							35	7600	7840	7250	6940	6610	44	11230	10240

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Non-Cyclic Operation					Cyclic Operation		
		mm	mm	mm	mm	mm	bar	Field Operation	25	40	50	65	bar	10	15
		in	in	in	in	in	psi	Field Operation	16	25	31	40	psi	6	9
540/65 R34	W16L W18L	550 21.7	1566 61.7	717 28.2	4659 183.4	145D	0.8	2220	2290	2110	2030	1930	1.0	3280	2990
							12	4890	5040	4650	4470	4250	15	7220	6590
							1.0	2530	2610	2410	2310	2200	1.3	3740	3410
							15	5570	5750	5310	5090	4850	18	8240	7510
							1.3	2960	3050	2810	2700	2570	1.6	4370	3980
							19	6520	6720	6190	5950	5660	24	9630	8770
							1.6	3340	3440	3180	3050	2900	2.0	4930	4500
							23	7360	7580	7000	6720	6390	29	10860	9910

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Non-Cyclic Operation				Cyclic Operation			
		mm	mm	mm	mm	mm	bar	Field Operation	25	40	50	65	bar	10	15
		in	in	in	in	in	psi	Field Operation	16	25	31	40	psi	6	9
540/65 R34	W16L W18L	550 21.7	1566 61.7	717 28.2	4659 183.4	152D	0.8	2220	2290	2110	2030	1930	1.0	3280	2990
							12	4890	5040	4650	4470	4250	15	7220	6590
							1.2	2730	2810	2600	2490	2370	1.5	4030	3670
							17	6010	6190	5730	5480	5220	22	8880	8080
							1.8	3450	3560	3290	3150	3000	2.3	5100	4650
							26	7600	7840	7250	6940	6610	33	11230	10240
							2.4	4080	4210	3890	3730	3550	3.0	6040	5500
							35	8990	9270	8570	8220	7820	44	13300	12110

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Non-Cyclic Operation				Cyclic Operation			
		mm	mm	mm	mm	mm	bar	Field Operation	25	40	50	65	bar	10	15
		in	in	in	in	in	psi	Field Operation	16	25	31	40	psi	6	9
540/65 R38	W16L W18L	550 21.7	1667 65.6	767 30.2	4975 195.9	147D	0.8	2350	2420	2230	2140	2040	1.0	3470	3160
							12	5180	5330	4910	4710	4490	15	7640	6960
							1.0	2680	2760	2550	2450	2330	1.3	3960	3610
							15	5900	6080	5620	5400	5130	18	8720	7950
							1.4	3270	3370	3110	2980	2840	1.8	4830	4400
							20	7200	7420	6850	6560	6260	25	10640	9690
							1.6	3540	3640	3370	3230	3075	2.0	5230	4770
							23	7800	8020	7420	7110	6770	29	11520	10510

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Non-Cyclic Operation				Cyclic Operation			
		mm	mm	mm	mm	mm	bar	Field Operation	25	40	50	65	bar	10	15
		in	in	in	in	in	psi	Field Operation	16	25	31	40	psi	6	9
540/65 R38	W16L W18L	550 21.7	1667 65.6	767 30.2	4975 195.9	153D	0.8	2350	2420	2230	2140	2040	1.0	3470	3160
							12	5180	5330	4910	4710	4490	15	7640	6960
							1.2	2990	3080	2850	2730	2600	1.5	4420	4030
							17	6590	6780	6280	6010	5730	22	9740	8880
							2.0	3770	3890	3590	3440	3280	2.2	5580	5080
							29	8300	8570	7910	7580	7220	32	12290	11190
							2.4	4200	4330	4000	3830	3650	3.0	6210	5660
							35	9250	9540	8810	8440	8040	44	13680	12470

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Non-Cyclic Operation				Cyclic Operation			
		mm	mm	mm	mm	mm	bar	Field Operation	25	40	50	65	bar	10	15
		in	in	in	in	in	psi	Field Operation	16	25	31	40	psi	6	9
600/65 R28	DW20B W18L	611 24.1	1491 58.7	668 26.3	4473 176.1	154D	0.8	2370	2440	2260	2160	2060	1.0	3500	3190
							12	5220	5370	4980	4760	4540	15	7710	7030
							1.4	3340	3440	3180	3050	2900	1.8	4930	4500
							20	7360	7580	7000	6720	6390	26	10860	9910
							2.0	4120	4240	3920	3760	3580	2.5	6090	5550
							29	9070	9340	8630	8280	7890	36	13410	12220
							2.4	4310	4440	4110	3940	3750	3.0	6380	5810
							35	9490	9780	9050	8680	8260	44	14050	12800

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Non-Cyclic Operation				Cyclic Operation			
		mm	mm	mm	mm	mm	bar	Field Operation	25	40	50	65	bar	10	15
		in	in	in	in	in	psi	Field Operation	16	25	31	40	psi	6	9
600/65 R28	DW20B W18L	611 24.1	1491 58.7	668 26.3	4473 176.1	147D	0.8	2350	2420	2230	2140	2040	1.0	3470	3160
							12	5180	5330	4910	4710	4490	15	7640	6960
							1.0	2680	2760	2550	2450	2330	1.3	3960	3610
							15	5900	6080	5620	5400	5130	19	8720	7950
							1.3	3130	3220	2980	2860	2720	1.6	4620	4220
							19	6890	7090	6560	6300	5990	23	10180	9300
							1.6	3540	3640	3370	3230	3075	2.0	5230	4770
							23	7800	8020	7420	7110	6770	29	11520	10510

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Non-Cyclic Operation				Cyclic Operation			
		mm	mm	mm	mm	mm	bar	Field Operation	25	40	50	65	bar	10	15
		in	in	in	in	in	psi	Field Operation	16	25	31	40	psi	6	9
600/65 R30	DW20B W18L	611 24.1	1542 60.7	693 27.3	4626 182.1	149D	0.8	2500	2570	2380	2280	2170	1.0	3690	3360
							12	5510	5660	5240	5020	4780	15	8130	7400
							1.0	2840	2930	2700	2590	2470	1.3	4200	3830
							15	6260	6450	5950	5700	5440	18	9250	8440
							1.3	3310	3410	3150	3020	2880	1.6	4900	4460
							19	7290	7510	6940	6650	6340	24	10790	9820
							1.6	3740	3850	3560	3410	3250	2.0	5530	5040
							23	8240	8480	7840	7510	7160	29	12180	11100

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Non-Cyclic Operation				Cyclic Operation			
		mm	mm	mm	mm	mm	bar	Field Operation	25	40	50	65	bar	10	15
		in	in	in	in	in	psi	Field Operation	16	25	31	40	psi	6	9
600/65 R30	DW20B W18L	611 24.1	1542 60.7	693 27.3	4626 182.1	152D	0.8	2500	2570	2380	2280	2170	1.0	3690	3360
							12	5510	5660	5240	5020	4780	15	8130	7400
							1.2	3160	3260	3010	2890	2750	1.5	4680	4260
							17	6960	7180	6630	6370	6060	22	10310	9380
							1.5	3600	3710	3430	3290	3130	1.9	5320	4850
							22	7930	8170	7560	7250	6890	27	11720	10680
							1.9	4080	4210	3890	3730	3550	2.3	6040	5500
							28	8990	9270	8570	8220	7820	34	13300	12110

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Non-Cyclic Operation				Cyclic Operation			
		mm	mm	mm	mm	mm	bar	Field Operation	25	40	50	65	bar	10	15
		in	in	in	in	in	psi	Field Operation	16	25	31	40	psi	6	9
600/65 R30/3	DW20B W18L	611 24.1	1542 60.7	693 27.3	4626 182.1	155D	0.8	2500	2570	2380	2280	2170	1.0	3690	3360
							12	5510	5660	5240	5020	4780	15	8130	7400
							1.4	3460	3570	3300	3160	3010	1.8	5120	4670
							20	7620	7860	7270	6960	6630	25	11280	10290
							1.8	4000	4120	3810	3650	3480	2.3	5920	5390
							26	8810	9070	8390	8040	7670	33	13040	11870
							2.0	4260	4380	4050	3890	3700	2.5	6290	5740
							29	9380	9650	8920	8570	8150	36	13850	12640
							2.4	4460	4590	4240	4070	3875	3.0	6590	6010
							35	9820	10110	9340	8960	8540	44	14520	13240

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Non-Cyclic Operation				Cyclic Operation			
		mm	mm	mm	mm	mm	bar	Field Operation	25	40	50	65	bar	10	15
		in	in	in	in	in	psi	Field Operation	16	25	31	40	psi	6	9
600/65 R30/3	DW20B W18L	611 24.1	1542 60.7	693 27.3	4626 182.1	155D	0.8	2500	2570	2380	2280	2170	1.0	3690	3360
							12	5510	5660	5240	5020	4780	15	8130	7400
							1.4	3460	3570	3300	3160	3010	1.8	5120	4670
							20	7620	7860	7270	6960	6630	25	11280	10290
							1.8	4000	4120	3810	3650	3480	2.3	5920	5390
							26	8810	9070	8390	8040	7670	33	13040	11870
							2.0	4260	4380	4050	3890	3700	2.5	6290	5740
							29	9380	9650	8920	8570	8150	36	13850	12640
							2.4	4460	4590	4240	4070	3875	3.0	6590	6010
							35	9820	10110	9340	8960	8540	44	14520	13240

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Non-Cyclic Operation				Cyclic Operation			
		mm	mm	mm	mm	mm	bar	Field Operation	25	40	50	65	bar	10	15
		in	in	in	in	in	psi	Field Operation	16	25	31	40	psi	6	9
600/65 R34	DW20B W18L	591 23.3	1644 64.7	780 30.7	4916 193.5	151D	0.8	2650	2730	2520	2420	2300	1.0	3910	3570
							12	5840	6010	5550	5330	5070	15	8610	7860
							1.0	3010	3100	2870	2750	2620	1.3	4450	4060
							15	6630	6830	6320	6060	5770	18	9800	8940
							1.3	3520	3630	3350	3210	3060	1.6	5200	4740
							19	7750	8000	7380	7070	6740	24	11450	10440
							1.6	3970	4090	3780	3620	3450	2.0	5870	5350
							23	8740	9010	8330	7970	7600	29	12930	11780

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Non-Cyclic Operation				Cyclic Operation			
		mm	mm	mm	mm	mm	bar	Field Operation	25	40	50	65	bar	10	15
		in	in	in	in	in	psi	Field Operation	16	25	31	40	psi	6	9
600/65 R34	DW20B W18L	591 23.3	1644 64.7	780 30.7	4916 193.5	157D	0.8	2650	2730	2520	2420	2300	1.0	3910	3570
							12	5840	6010	5550	5330	5070	15	8610	7860
							1.2	3170	3270	3020	2900	2760	1.5	4690	4280
							17	6980	7200	6650	6390	6080	22	10330	9430
							1.5	3610	3720	3440	3300	3140	1.9	5340	4870
							22	7950	8190	7580	7270	6920	27	11760	10730
							2.0	4270	4400	4060	3900	3710	2.5	6310	5750
							29	9410	9690	8940	8590	8170	36	13900	12670
							2.4	4740	4890	4520	4330	4125	3.0	7010	6390
35	10440	10770	9960	9540	9090	44	15440	14070							

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Non-Cyclic Operation				Cyclic Operation			
		mm	mm	mm	mm	mm	bar	Field Operation	25	40	50	65	bar	10	15
		in	in	in	in	in	psi	Field Operation	16	25	31	40	psi	6	9
600/65 R38	DW20B W18L	600 23.6	1745 68.7	798 31.4	5236 206.1	153D	0.8	2790	2880	2660	2550	2430	1.0	4130	3770
							12	6150	6340	5860	5620	5350	15	9100	8300
							1.0	3190	3280	3030	2910	2770	1.3	4710	4290
							15	7030	7220	6670	6410	6100	18	10370	9450
							1.3	3710	3830	3540	3390	3230	1.6	5490	5010
							19	8170	8440	7800	7470	7110	24	12090	11040
							1.6	4200	4330	4000	3830	3650	2.0	6210	5660
							23	9250	9540	8810	8440	8040	29	13680	12470

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Non-Cyclic Operation				Cyclic Operation			
		mm	mm	mm	mm	mm	bar	Field Operation	25	40	50	65	bar	10	15
		in	in	in	in	in	psi	Field Operation	16	25	31	40	psi	6	9
320/65 R16	W10 W9 W11L	319 12.6	822 32.4	370 14.6	2466 97.1	117D	0.8	780	810	740	710	680	1.0	1160	1050
							12	1720	1780	1630	1560	1500	15	2560	2310
							1.4	1080	1110	1030	990	940	1.8	1600	1460
							20	2380	2440	2270	2180	2070	25	3520	3220
							2.0	1330	1370	1270	1220	1160	2.5	1970	1800
							29	2930	3020	2800	2690	2560	36	4340	3960
							2.4	1480	1520	1410	1350	1285	3.0	2180	1990
							35	3260	3350	3110	2970	2830	44	4800	4380

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Non-Cyclic Operation				Cyclic Operation			
		mm	mm	mm	mm	mm	bar	Field Operation	25	40	50	65	bar	10	15
		in	in	in	in	in	psi	Field Operation	16	25	31	40	psi	6	9
320/65 R18	W10 W9 W11	319 12.6	873 34.4	395 15.6	2619 103.1	109D	0.8	780	810	740	710	680	1.0	1160	1050
							12	1720	1780	1630	1560	1500	15	2560	2310
							1.0	900	920	850	820	780	1.3	1330	1210
							15	1980	2030	1870	1810	1720	19	2930	2670
							1.4	1090	1130	1040	1000	950	1.8	1620	1470
							20	2400	2490	2290	2200	2090	26	3570	3240
							1.6	1180	1230	1130	1080	1030	2.0	1750	1600
							23	2600	2710	2490	2380	2270	29	3850	3520

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Non-Cyclic Operation				Cyclic Operation			
		mm	mm	mm	mm	mm	bar	Field Operation	25	40	50	65	bar	10	15
		in	in	in	in	in	psi	Field Operation	16	25	31	40	psi	6	9
340/65 R18	W11 W10 W12	343 13.5	899 35.4	406 16.0	2697 106.2	122D	0.8	910	940	870	830	790	1.0	1340	1220
							12	2000	2070	1920	1830	1740	15	2950	2690
							1.4	1270	1300	1200	1160	1100	1.8	1870	1710
							20	2800	2860	2640	2560	2420	25	4120	3770
							2.0	1550	1600	1480	1420	1350	2.5	2300	2090
							29	3410	3520	3260	3130	2970	36	5070	4600
							2.4	1730	1780	1640	1580	1500	3.0	2550	2330
							35	3810	3920	3610	3480	3300	44	5620	5130

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Non-Cyclic Operation				Cyclic Operation			
		mm	mm	mm	mm	mm	bar	Field Operation	25	40	50	65	bar	10	15
		in	in	in	in	in	psi	Field Operation	16	25	31	40	psi	6	9
340/65 R20	W11 W10 W12	343 13.5	950 37.4	431 17.0	2850 112.2	124D	0.8	840	870	800	770	730	1.0	1240	1130
							12	1850	1920	1760	1700	1610	15	2730	2490
							1.4	1180	1220	1130	1080	1030	1.8	1750	1600
							20	2600	2690	2490	2380	2270	25	3850	3520
							2.0	1660	1710	1580	1510	1440	2.5	2450	2230
							29	3660	3770	3480	3330	3170	36	5400	4910
							2.4	1840	1900	1750	1680	1600	3.0	2720	2480
							35	4050	4190	3850	3700	3520	44	5990	5460

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Non-Cyclic Operation				Cyclic Operation			
		mm	mm	mm	mm	mm	bar	Field Operation	25	40	50	65	bar	10	15
		in	in	in	in	in	psi	Field Operation	16	25	31	40	psi	6	9
340/65 R20	W11 W10 W12	343 13.5	950 37.4	431 17.0	2850 112.2	124D	0.8	840	870	800	770	730	1.0	1240	1130
							12	1850	1920	1760	1700	1610	15	2730	2490
							1.4	1180	1220	1130	1080	1030	1.8	1750	1600
							20	2600	2690	2490	2380	2270	25	3850	3520
							2.0	1660	1710	1580	1510	1440	2.5	2450	2230
							29	3660	3770	3480	3330	3170	36	5400	4910
							2.4	1840	1900	1750	1680	1600	3.0	2720	2480
35	4050	4190	3850	3700	3520	44	5990	5460							

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)											
								Speed,km/h(mph)											
		SW	OD					Non-Cyclic Operation						Cyclic Operation					
		mm	mm					mm	mm	mm	bar	Field Operation	25	40	50	65	bar	10	15
		in	in					in	in	in	psi	Field Operation	16	25	31	40	psi	6	9
420/65 R20	W13 W11 W12	418 16.5	1054 41.5	473 18.6	3113 122.6	124D	0.8	1320	1360	1260	1210	1150	1.0	1960	1780				
							12	2910	3000	2780	2670	2530	15	4320	3920				
							1.4	1830	1880	1740	1670	1590	1.8	2700	2460				
							20	4030	4140	3830	3680	3500	25	5950	5420				
							2.0	2250	2320	2150	2060	1960	2.5	3330	3040				
							29	4960	5110	4740	4540	4320	36	7330	6700				
							2.4	2510	2580	2390	2290	2180	3.0	3710	3380				
							35	5530	5680	5260	5040	4800	44	8170	7440				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Non-Cyclic Operation				Cyclic Operation			
		mm	mm	mm	mm	mm	bar	Field Operation	25	40	50	65	bar	10	15
		in	in	in	in	in	psi	Field Operation	16	25	31	40	psi	6	9
420/65 R24	W13 W11 W12	418 16.5	1156 45.5	524 20.6	3414 134.4	138D	0.8	1290	1330	1230	1180	1120	1.0	1900	1740
							12	2840	2930	2710	2600	2470	15	4190	3830
							1.4	1840	1900	1750	1680	1600	1.8	2720	2480
							20	4050	4190	3850	3700	3520	26	5990	5460
							2.0	2060	2120	1960	1880	1790	2.5	3040	2770
							29	4540	4670	4320	4140	3940	36	6700	6100
							2.4	2290	2360	2180	2090	1990	3.0	3380	3080
							35	5040	5200	4800	4600	4380	44	7440	6780
							3.2	2710	2800	2580	2480	2360	4.0	4010	3660
							46	5970	6170	5680	5460	5200	58	8830	8060

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Non-Cyclic Operation				Cyclic Operation			
		mm	mm	mm	mm	mm	bar	Field Operation	25	40	50	65	bar	10	15
		in	in	in	in	in	psi	Field Operation	16	25	31	40	psi	6	9
440/65 R20	W14L W13L W15L	441 17.4	1080 42.5	483 19.0	3240 127.6	138D	0.8	1290	1330	1230	1180	1120	1.0	1900	1740
							12	2840	2930	2710	2600	2470	15	4190	3830
							1.4	1840	1900	1750	1680	1600	1.8	2720	2480
							20	4050	4190	3850	3700	3520	26	5990	5460
							2.0	2440	2510	2330	2230	2120	2.5	3600	3290
							29	5370	5530	5130	4910	4670	36	7930	7250
							2.4	2710	2800	2480	2480	2360	3.0	4010	3660
							35	5970	6170	5460	5460	5200	44	8830	8060

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Non-Cyclic Operation				Cyclic Operation			
		mm	mm	mm	mm	mm	bar	Field Operation	25	40	50	65	bar	10	15
		in	in	in	in	in	psi	Field Operation	16	25	31	40	psi	6	9
440/65 R24	W14L W13 W15L	441 17.4	1182 46.5	540 21.3	3565 140.4	128D	0.8	1370	1410	1300	1250	1190	1.0	2020	1840
							12	3020	3110	2860	2750	2620	15	4450	4050
							1.0	1560	1610	1490	1430	1360	1.3	2310	2110
							15	3440	3550	3280	3150	3000	18	5090	4650
							1.4	1910	1970	1820	1740	1660	1.8	2820	2570
							20	4210	4340	4010	3830	3660	25	6210	5660
							1.6	2070	2130	1970	1890	1800	2.0	3060	2790
							23	4560	4690	4340	4160	3960	29	6740	6150

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Non-Cyclic Operation				Cyclic Operation			
		mm	mm	mm	mm	mm	bar	Field Operation	25	40	50	65	bar	10	15
		in	in	in	in	in	psi	Field Operation	16	25	31	40	psi	6	9
440/65 R24	W14L W13 W15L	441 17.4	1182 46.5	540 21.3	3565 140.4	135D	0.8	1370	1410	1300	1250	1190	1.0	2020	1840
							12	3020	3110	2860	2750	2620	15	4450	4050
							1.2	1670	1720	1590	1520	1450	1.5	2470	2250
							17	3680	3790	3500	3350	3190	22	5440	4960
							2.0	2250	2320	2150	2060	1960	2.5	3330	3040
							29	4960	5110	4740	4540	4320	36	7330	6700
							2.4	2510	2580	2390	2290	2180	3.0	3710	3380
							35	5530	5680	5260	5040	4800	44	8170	7440

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Non-Cyclic Operation				Cyclic Operation			
		mm	mm	mm	mm	mm	bar	Field Operation	25	40	50	65	bar	10	15
		in	in	in	in	in	psi	Field Operation	16	25	31	40	psi	6	9
440/65 R28	W14L W13 W15L	441 17.4	1283 50.5	590 23.2	3869 152.3	138D	0.8	1430	1470	1360	1300	1240	1.0	2110	1920
							12	3150	3240	3000	2860	2730	15	4650	4230
							1.2	1810	1860	1720	1650	1570	1.5	2610	2430
							17	3990	4100	3790	3630	3460	22	5750	5350
							2.0	2440	2510	2320	2230	2120	2.5	3600	3290
							29	5370	5530	5110	4910	4670	36	7930	7250
							2.4	2710	2800	2580	2480	2360	3.0	4010	3660
							35	5970	6170	5680	5460	5200	44	8830	8060

FEATURES AND BENEFITS

Directional &
robust lugs

Provides higher
traction




Robust centre blocks

Low noise &
smooth rides



Rounded shoulders

Less soil damage



Through grooves

Better self-cleaning



Higher OD

More mileage



FARMAX R65 X3

TRA CODE: R-1W



FARMAX R65 X3

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Non-Cyclic Operation				Cyclic Operation			
		mm	mm	mm	mm	mm	bar	Field Operation	25	40	50	65	bar	10	15
		in	in	in	in	in	psi	Field Operation	16	25	31	40	psi	6	9
540/65 R28	W16L W18L	540 21.3	1430 56.3	651 25.6	4228 166.5	149D	0.8	2010	2070	1920	1840	1750	1	2980	2710
							12	4430	4560	4230	4050	3850	15	6560	5970
							1.2	2580	2650	2450	2350	2240	1.5	3810	3470
							17	5680	5840	5400	5180	4930	22	8390	7640
							1.6	3050	3140	2900	2780	2650	2	4510	4110
							23	6720	6920	6390	6120	5840	29	9930	9050
							2.4	3740	3850	3560	3410	3250	3	5530	5040
							35	8240	8480	7840	7510	7160	44	12180	11100

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Non-Cyclic Operation				Cyclic Operation			
		mm	mm	mm	mm	mm	bar	Field Operation	25	40	50	65	bar	10	15
		in	in	in	in	in	psi	Field Operation	16	25	31	40	psi	6	9
540/65 R30	W16L W18L	540 21.3	1472 58.0	673 26.5	4463 175.7	150D	0.8	2070	2130	1970	1890	1800	1.0	3060	2790
							12	4560	4690	4340	4160	3960	15	6740	6150
							1.2	2650	2730	2520	2420	2300	1.5	3910	3570
							17	5840	6010	5550	5330	5070	22	8610	7860
							1.6	3130	3230	2980	2860	2725	2.0	4630	4220
							23	6890	7110	6560	6300	6000	29	10200	9300
							2.4	3850	3970	3670	3520	3350	3.0	5700	5190
							35	8480	8740	8080	7750	7380	44	12560	11430

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Non-Cyclic Operation				Cyclic Operation			
		mm	mm	mm	mm	mm	bar	Field Operation	25	40	50	65	bar	10	15
		in	in	in	in	in	psi	Field Operation	16	25	31	40	psi	6	9
650/65 R38	DW20B DW21B DW23B	660 26.0	1830 72.0	838 33.0	5548 218.4	163D	0.8	3050	3140	2900	2780	2650	1.0	4510	4110
							12	6720	6920	6390	6120	5840	15	9930	9050
							1.2	3970	4090	3780	3620	3450	1.5	5870	5350
							17	8740	9010	8330	7970	7600	22	12930	11780
							1.6	4740	4890	4520	4330	4125	2.0	7010	6390
							23	10440	10770	9960	9540	9090	29	15440	14070
							2.4	5610	5780	5340	5120	4875	3.0	8290	7560
							35	12360	12730	11760	11280	10740	44	18260	16650

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Non-Cyclic Operation					Cyclic Operation		
		mm	mm					Field Operation	25	40	50	65	bar	10	15
		in	in	in	in	in	psi	Field Operation	16	25	31	40	psi	6	9
650/65 R42	DW20B DW21B DW23B	660 26.0	1935 76.2	890 35.0	5866 230.9	170D	0.8	3220	3320	3070	2940	2800	1.0	4760	4340
							12	7090	7310	6760	6480	6170	15	10480	9560
							1.6	4890	5040	4650	4460	4250	2.0	7230	6590
							23	10770	11100	10240	9820	9360	29	15930	14520
							2.4	5920	6100	5640	5410	5150	3.0	8760	7980
							35	13040	13440	12420	11920	11340	44	19300	17580
							3.2	6900	7110	6570	6300	6000	4.0	10200	9300
							46	15200	15660	14470	13880	13220	58	22470	20480

FEATURES AND BENEFITS

Tilted lug tip

Lesser vibration
& noise



Mud breaker

Better self cleaning



Higher angle & lug
overlap at centre

Better roadability



Wider tread
larger inner volume

Reduced soil
compaction



R1-W tread depth
Longer tyre life



Lower angle at
shoulder
Superior traction



Rounded shoulder
Lesser damage to
soil & crop



FARMAX R70/75

TRA CODE: R-1W



FARMAX R70

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	50	65	Static	10	20	30	40
		in	in	in	in	in	psi	31	40	Static	6	12	19	25
380/70 R20	W12 W13 W11	380 15	1082 42.6	486 19.1	3185 125.4	132D 35A8	1.8	1770	1690	3890	2540	2080	1940	1850
							26	3900	3720	8570	5590	4580	4270	4070
							2.4	2100	2000	4600	3000	2460	2300	2190
							35	4630	4410	10130	6610	5420	5070	4820
							0.8	1000	2300	1500	1230	1150	1100	1050
							12	2200	5070	3300	2710	2530	2420	2310
							1.6	1500	3450	2250	1850	1730	1640	1580
							23	3300	7600	4960	4070	3810	3610	3480

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
380/70 R20	W12 W13 W11	380 15.0	1082 42.6	486 19.1	3185 125.4	122D 25A8	0.8	2300	1500	1230	1150	1100	1050	1000
							12	5070	3300	2710	2530	2420	2310	2200
							1.2	2920	1910	1560	1460	1390	1330	1270
							17	6430	4210	3440	3220	3060	2930	2800
							1.4	3200	2090	1710	1600	1520	1460	1390
							20	7050	4600	3770	3520	3350	3220	3060
							1.6	3450	2250	1850	1730	1640	1580	1500
							23	7600	4960	4070	3810	3610	3480	3300

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
380/70 R24	W12 W11 W13	380 15.0	1190 46.9	540 21.3	3514 138.3	125D 28A8	0.8	2530	1650	1350	1270	1200	1160	1100
							12	5570	3630	2970	2800	2640	2560	2420
							1.0	2880	1880	1540	1440	1370	1310	1250
							15	6340	4140	3390	3170	3020	2890	2750
							1.3	3360	2190	1800	1680	1600	1530	1460
							19	7400	4820	3960	3700	3520	3370	3220
							1.6	3800	2480	2030	1900	1810	1730	1650
							23	8370	5460	4470	4190	3990	3810	3630

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
380/70 R28	W12 W13 W11	380 15.0	1293 50.9	589 23.2	3843 151.3	132D 35A8	0.8	2690	1760	1440	1350	1280	1230	1170
							12	5930	3880	3170	2970	2820	2710	2580
							1.2	3400	2220	1820	1700	1620	1550	1480
							17	7490	4890	4010	3740	3570	3410	3260
							1.4	3730	2430	1990	1860	1770	1700	1620
							20	8220	5350	4380	4100	3900	3740	3570
							2.4	4600	3000	2460	2300	2190	2100	2000
							35	10130	6610	5420	5070	4820	4630	4410

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	in	psi	Static	6	12	19	25	31	40
380/70 R28	W12 W13 W11	380 15.0	1293 50.9	589 23.2	3843 151.3	127D 30A8	0.8	2690	1760	1440	1350	1280	1230	1170
							12	5930	3880	3170	2970	2820	2710	2580
							1.2	3400	2220	1820	1700	1620	1550	1480
							17	7490	4890	4010	3740	3570	3410	3260
							1.4	3730	2430	1990	1860	1770	1700	1620
							20	8220	5350	4380	4100	3900	3740	3570
							1.6	4030	2630	2150	2010	1920	1840	1750
							23	8880	5790	4740	4430	4230	4050	3850

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	in	psi	Static	6	12	19	25	31	40
400/75 R38	W13 W12 W14	404 15.9	1565 61.6	723 28.5	4646 182.9	138D 41A8	0.8	3610	2360	1930	1810	1720	1650	1570
							12	7950	5200	4250	3990	3790	3630	3460
							1.0	4120	2690	2200	2060	1960	1880	1790
							15	9070	5930	4850	4540	4320	4140	3940
							1.4	5010	3270	2680	2510	2390	2290	2180
							20	11040	7200	5900	5530	5260	5040	4800
							1.6	5430	3540	2900	2710	2580	2480	2360
							23	11960	7800	6390	5970	5680	5460	5200

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	in	psi	Static	6	12	19	25	31	40
420/70 R24	W13 W12 W14	430 16.9	1248 49.1	563 22.2	3683 145.0	130D 33A8	0.8	2900	1890	1550	1450	1380	1320	1260
							12	6390	4160	3410	3190	3040	2910	2780
							1.0	3310	2160	1770	1660	1580	1510	1440
							15	7290	4760	3900	3660	3480	3330	3170
							1.3	3860	2520	2070	1930	1840	1760	1680
							19	8500	5550	4560	4250	4050	3880	3700
							1.6	4370	2850	2340	2190	2080	2000	1900
							23	9630	6280	5150	4820	4580	4410	4190

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
420/70 R28	W13 W12 W14	430 16.9	1349 53.1	614 24.2	3985 156.9	133D 36A8	0.8	3150	2060	1690	1580	1500	1440	1370
							12	6940	4540	3720	3480	3300	3170	3020
							1.0	3590	2340	1920	1790	1710	1640	1560
							15	7910	5150	4230	3940	3770	3610	3440
							1.3	4190	2730	2240	2090	1990	1910	1820
							19	9230	6010	4930	4600	4380	4210	4010
							1.6	4740	3090	2530	2370	2260	2160	2060
							23	10440	6810	5570	5220	4980	4760	4540

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	in	psi	Static	6	12	19	25	31	40
420/70 R30	W13 W12 W14	430 16.9	1398 55.0	636 25.0	4155 163.6	134D 37A8	0.8	3240	2120	1730	1620	1540	1480	1410
							12	7140	4670	3810	3570	3390	3260	3110
							1.0	3700	2420	1980	1850	1760	1690	1610
							15	8150	5330	4360	4070	3880	3720	3550
							1.4	4510	2940	2410	2250	2150	2060	1960
							20	9930	6480	5310	4960	4740	4540	4320
							1.6	4880	3180	2610	2440	2320	2230	2120
							23	10750	7000	5750	5370	5110	4910	4670

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	in	psi	Static	6	12	19	25	31	40
480/70 R24	W15L W14L W16L	490 19.3	1316 51.8	588 23.1	3870 152.4	138D 41A8	0.8	3610	2360	1930	1810	1720	1650	1570
							12	7950	5200	4250	3990	3790	3630	3460
							1.0	4120	2690	2200	2060	1960	1880	1790
							15	9070	5930	4850	4540	4320	4140	3940
							1.4	5010	3270	2680	2510	2390	2290	2180
							20	11040	7200	5900	5530	5260	5040	4800
							1.6	5430	3540	2900	2710	2580	2480	2360
							23	11960	7800	6390	5970	5680	5460	5200

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	in	psi	Static	6	12	19	25	31	40
480/70 R28	W15L W14L W16L	490 19.3	1421 55.9	640 25.2	4183 164.7	140D 43A8	0.8	3840	2510	2050	1920	1830	1750	1670
							12	8460	5530	4520	4230	4030	3850	3680
							1.0	4370	2850	2340	2190	2080	2000	1900
							15	9630	6280	5150	4820	4580	4410	4190
							1.4	5310	3470	2840	2660	2530	2430	2310
							20	11700	7640	6260	5860	5570	5350	5090
							1.6	5750	3750	3080	2880	2740	2630	2500
							23	12670	8260	6780	6340	6040	5790	5510

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	in	psi	Static	6	12	19	25	31	40
480/70 R28	W15L W14L W16L	490 19.3	1421 55.9	640 25.2	4183 164.7	151D 54A8	0.8	3840	2510	2050	1920	1830	1750	1670
							12	8460	5530	4520	4230	4030	3850	3680
							1.8	5680	3710	3040	2840	2700	2590	2470
							26	12510	8170	6700	6260	5950	5700	5440
							2.5	6880	4490	3680	3440	3270	3140	2990
							36	15150	9890	8110	7580	7200	6920	6590
							3.2	7940	5180	4240	3970	3780	3620	3450
							46	17490	11410	9340	8740	8330	7970	7600

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
480/70 R30	W15L W14L W16L	490 19.3	1478 58.2	671 26.4	4377 172.3	141D 44A8	0.8	3960	2580	2120	1980	1880	1810	1720
							12	8720	5680	4670	4360	4140	3990	3790
							1.0	4510	2940	2410	2250	2150	2060	1960
							15	9930	6480	5310	4960	4740	4540	4320
							1.3	5240	3420	2800	2620	2500	2390	2280
							19	11540	7530	6170	5770	5510	5260	5020
							1.6	5920	3860	3170	2960	2820	2700	2575
							23	13040	8500	6980	6520	6210	5950	5670

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	in	psi	Static	6	12	19	25	31	40
480/70 R30	W15L W14L W16L	490 19.3	1478 58.2	671 26.4	4377 172.3	147D 50A8	0.8	3730	2430	1990	1860	1770	1700	1620
							12	8220	5350	4380	4100	3900	3740	3570
							1.2	4720	3080	2520	2360	2240	2150	2050
							17	10400	6780	5550	5200	4930	4740	4520
							1.4	5380	3510	2880	2690	2560	2460	2340
							20	11850	7730	6340	5930	5640	5420	5150
							2.0	6350	4530	3390	3170	3020	2900	2760
							29	13990	9980	7470	6980	6650	6390	6080
							2.4	7070	4610	3780	3540	3370	3230	3075
35	15570	10150	8330	7800	7420	7110	6770							

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
480/70 R34	W15L W14L W16L	490 19.3	1580 62.2	722 28.4	4696 184.9	143D 46A8	0.8	4160	2720	2230	2080	1980	1900	1810
							12	9160	5990	4910	4580	4360	4190	3990
							1.2	5290	3450	2830	2650	2520	2420	2300
							17	11650	7600	6230	5840	5550	5330	5070
							1.4	5800	3780	3100	2900	2760	2650	2520
							20	12780	8330	6830	6390	6080	5840	5550
							1.6	6270	4090	3350	3130	2980	2860	2725
							23	13810	9010	7380	6890	6560	6300	6000

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
480/70 R34	W15L W14L W16L	490 19.3	1580 62.2	722 28.4	4696 184.9	149D 52A8	0.8	4160	2720	2230	2080	1980	1900	1810
							12	9160	5990	4910	4580	4360	4190	3990
							1.8	6330	4130	3380	3160	3010	2890	2750
							26	13940	9100	7440	6960	6630	6370	6060
							2.0	6720	4380	3590	3360	3200	3070	2920
							29	14800	9650	7910	7400	7050	6760	6430
							2.4	7480	4880	4000	3740	3560	3410	3250
							35	16480	10750	8810	8240	7840	7510	7160

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	in	psi	Static	6	12	19	25	31	40
480/70 R34/3	W15L W14L W16L	490 19.3	1580 62.2	722 28.4	4696 184.9	155D 58A8	0.8	4160	2720	2230	2080	1980	1900	1810
							12	9160	5990	4910	4580	4360	4190	3990
							2.6	8050	5250	4310	4030	3830	3680	3500
							38	17730	11560	9490	8880	8440	8110	7710
							2.8	8400	5480	4490	4200	4000	3830	3650
							41	18500	12070	9890	9250	8810	8440	8040
							3.1	8910	5810	4770	4460	4240	4070	3875
							45	19630	12800	10510	9820	9340	8960	8540

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
480/70 R38	W15L W14L W16L	500 19.7	1680 66.1	773 30.4	5040 198.4	145D 48A8	0.8	4440	2900	2370	2220	2110	2030	1930
							12	9780	6390	5220	4890	4650	4470	4250
							1.0	5060	3300	2710	2530	2410	2310	2200
							15	11150	7270	5970	5570	5310	5090	4850
							1.4	6160	4020	3300	3080	2930	2810	2680
							20	13570	8850	7270	6780	6450	6190	5900
							1.6	6670	4350	3570	3340	3180	3050	2900
							23	14690	9580	7860	7360	7000	6720	6390

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
520/70 R30	W16L W15L W18L	530 20.9	1536 60.5	694 27.3	4537 178.6	145D 48A8	0.8	4440	2900	2370	2220	2110	2030	1930
							12	9780	6390	5220	4890	4650	4470	4250
							1.0	5060	3300	2710	2530	2410	2310	2200
							15	11150	7270	5970	5570	5310	5090	4850
							1.3	5910	3860	3160	2960	2810	2700	2570
							19	13020	8500	6960	6520	6190	5950	5660
							1.6	6670	4350	3570	3340	3180	3050	2900
							23	14690	9580	7860	7360	7000	6720	6390

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
520/70 R34	W16L W15L W18L	516 20.3	1640 64.6	743 29.3	4920 193.7	148D 51A8	0.8	4830	3150	2580	2420	2300	2210	2100
							12	10640	6940	5680	5330	5070	4870	4630
							1.0	5500	3590	2940	2750	2620	2510	2390
							15	12110	7910	6480	6060	5770	5530	5260
							1.4	6690	4370	3580	3350	3190	3060	2910
							20	14740	9630	7890	7380	7030	6740	6410
							1.6	7250	4730	3870	3620	3450	3310	3150
							23	15970	10420	8520	7970	7600	7290	6940

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
520/70 R34	W16L W15L W18L	516 20.3	1640 64.6	743 29.3	4920 193.7	168D 71A8	0.8	4830	3150	2580	2420	2300	2210	2100
							12	10640	6940	5680	5330	5070	4870	4630
							1.8	7750	5060	4150	3880	3690	3540	3370
							26	17070	11150	9140	8550	8130	7800	7420
							2.8	10030	6540	5360	5010	4770	4580	4360
							41	22090	14410	11810	11040	10510	10090	9600
							4.3	12880	8400	6890	6440	6130	5880	5600
							62	28370	18500	15180	14190	13500	12950	12330

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
520/70 R38	W16L W15L W18L	530 20.9	1749 68.9	800 31.5	5204 204.9	150D 53A8	0.8	3840	2510	2050	1920	1830	1750	1670
							12	8460	5530	4520	4230	4030	3850	3680
							1.0	4370	2850	2340	2190	2080	2000	1900
							15	9630	6280	5150	4820	4580	4410	4190
							1.3	5080	3320	2720	2540	2420	2320	2210
							19	11190	7310	5990	5590	5330	5110	4870
							1.6	5750	3750	3080	2880	2740	2630	2500
							23	12670	8260	6780	6340	6040	5790	5510

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
580/70 R38	W18L	577 22.7	1827 71.9	832 32.8	5420 213.4	180D 83A8	0.8	5930	3870	3170	2970	2830	2710	2580
							12	13060	8520	6980	6540	6230	5970	5680
							4.0	13800	9000	7380	6900	6570	6300	6000
							58	30400	19820	16260	15200	14470	13880	13220
							5.0	17600	11480	9410	8800	8380	8030	7650
							73	38770	25290	20730	19380	18460	17690	16850
							5.4	18400	12000	9840	9200	8760	8400	8000
							78	40530	26430	21670	20260	19300	18500	17620

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	in	psi	Static	6	12	19	25	31	40
580/70 R38	W18L	577 22.7	1827 71.9	832 32.8	5420 213.4	155D 58A8	0.8	5930	3870	3170	2970	2830	2710	2580
							12	13060	8520	6980	6540	6230	5970	5680
							1.0	6760	4410	3620	3380	3220	3090	2940
							15	14890	9710	7970	7440	7090	6810	6480
							1.2	7520	4910	4020	3760	3580	3430	3270
							17	16560	10810	8850	8280	7890	7560	7200
							1.4	8230	5370	4400	4120	3920	3760	3580
							20	18130	11830	9690	9070	8630	8280	7890
							1.6	8910	5810	4770	4460	4240	4070	3875
23	19630	12800	10510	9820	9340	8960	8540							

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	in	psi	Static	6	12	19	25	31	40
580/70 R38/3	W18L	577 22.7	1827 71.9	832 32.8	5420 213.4	170D 73A8	0.8	5930	3870	3170	2970	2830	2710	2580
							12	13060	8520	6980	6540	6230	5970	5680
							2.4	10240	6680	5470	5120	4870	4670	4450
							35	22560	14710	12050	11280	10730	10290	9800
							2.8	11200	7310	5990	5600	5330	5110	4870
							41	24670	16100	13190	12330	11740	11260	10730
							3.4	12560	8190	6720	6280	5980	5730	5460
							49	27670	18040	14800	13830	13170	12620	12030
							4.0	13800	9000	7380	6900	6570	6300	6000
58	30400	19820	16260	15200	14470	13880	13220							

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	in	psi	Static	6	12	19	25	31	40
600/70 R28	DW20B DW18L	610 24.0	1551 61.1	700 27.6	4629 182.2	157D 60A8	1.8	8210	5360	4390	4110	3910	3750	3570
							26	18080	11810	9670	9050	8610	8260	7860
							2.0	8740	5700	4670	4370	4160	3990	3800
							29	19250	12560	10290	9630	9160	8790	8370
							2.4	9730	6350	5200	4860	4630	4440	4230
							35	21430	13990	11450	10700	10200	9780	9320
							2.8	10640	6940	5690	5320	5060	4860	4625
							41	23440	15290	12530	11720	11150	10700	10190

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	in	psi	Static	6	12	19	25	31	40
600/70 R28	DW20B DW18L	610 24.0	1551 61.1	700 27.6	4629 182.2	157D 60A8	1.8	8210	5360	4390	4110	3910	3750	3570
							26	18080	11810	9670	9050	8610	8260	7860
							2.0	8740	5700	4670	4370	4160	3990	3800
							29	19250	12560	10290	9630	9160	8790	8370
							2.4	9730	6350	5200	4860	4630	4440	4230
							35	21430	13990	11450	10700	10200	9780	9320
							2.8	10640	6940	5690	5320	5060	4860	4625
							41	23440	15290	12530	11720	11150	10700	10190

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	in	psi	Static	6	12	19	25	31	40
600/70 R30	DW20B DW18L	610 24.0	1624 63.9	726 28.6	4781 188.2	158D 61A8	0.8	5430	3540	2900	2710	2580	2480	2360
							12	11960	7800	6390	5970	5680	5460	5200
							1.0	6190	4040	3310	3090	2950	2820	2690
							15	13630	8900	7290	6810	6500	6210	5930
							1.3	7220	4710	3860	3610	3440	3300	3140
							19	15900	10370	8500	7950	7580	7270	6920
							1.6	8170	5330	4370	4080	3890	3730	3550
							23	18000	11740	9630	8990	8570	8220	7820

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
600/70 R30	DW20B DW18L	610 24.0	1624 63.9	726 28.6	4781 188.2	158D 61A8	0.8	5430	3540	2900	2710	2580	2480	2360
							12	11960	7800	6390	5970	5680	5460	5200
							1.0	6190	4040	3310	3090	2950	2820	2690
							15	13630	8900	7290	6810	6500	6210	5930
							1.3	7220	4710	3860	3610	3440	3300	3140
							19	15900	10370	8500	7950	7580	7270	6920
							1.6	8170	5330	4370	4080	3890	3730	3550
							23	18000	11740	9630	8990	8570	8220	7820

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	in	psi	Static	6	12	19	25	31	40
600/70 R30	DW20B DW18L	610 24.0	1624 63.9	726 28.6	4781 188.2	168D 71A8	0.8	5430	3540	2900	2710	2580	2480	2360
							12	11960	7800	6390	5970	5680	5460	5200
							1.2	6900	4500	3690	3450	3290	3150	3000
							17	15200	9910	8130	7600	7250	6940	6610
							1.6	8170	5330	4370	4080	3890	3730	3550
							23	18000	11740	9630	8990	8570	8220	7820
							2.4	12080	7880	6460	6040	5750	5510	5250
							35	26610	17360	14230	13300	12670	12140	11560

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	in	psi	Static	6	12	19	25	31	40
600/70 R30	DW20B DW18L	610 24.0	1624 63.9	726 28.6	4781 188.2	168D 71A8	0.8	5430	3540	2900	2710	2580	2480	2360
							12	11960	7800	6390	5970	5680	5460	5200
							1.2	6900	4500	3690	3450	3290	3150	3000
							17	15200	9910	8130	7600	7250	6940	6610
							1.6	8170	5330	4370	4080	3890	3730	3550
							23	18000	11740	9630	8990	8570	8220	7820
							2.4	12080	7880	6460	6040	5750	5510	5250
							35	26610	17360	14230	13300	12670	12140	11560

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	in	psi	Static	6	12	19	25	31	40
620/70 R42	DW20B W18L	625 24.6	1935 76.2	881 34.7	5745 226.2	166D 69A8	0.8	6390	4170	3420	3200	3040	2920	2780
							12	14070	9190	7530	7050	6700	6430	6120
							1.4	8880	5790	4750	4440	4230	4050	3860
							20	19560	12750	10460	9780	9320	8920	8500
							2.0	10950	7140	5850	5470	5210	5000	4760
							29	24120	15730	12890	12050	11480	11010	10480
							2.4	12190	7950	6520	6100	5800	5570	5300
							35	26850	17510	14360	13440	12780	12270	11670

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	in	psi	Static	6	12	19	25	31	40
620/70 R42	DW20B W18L	625 24.6	1935 76.2	881 34.7	5745 226.2	173D 76A8	0.8	6390	4170	3420	3200	3040	2920	2780
							12	14070	9190	7530	7050	6700	6430	6120
							1.6	9610	6270	5140	4810	4580	4390	4180
							23	21170	13810	11320	10590	10090	9670	9210
							1.8	10300	6720	5510	5150	4910	4700	4480
							26	22690	14800	12140	11340	10810	10350	9870
							3.4	14950	9750	8000	7480	7120	6830	6500
							49	32930	21480	17620	16480	15680	15040	14320

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
710/70 R38	DW23B DW25B	716 28.2	1985 78.1	891 35.1	5856 230.6	171D 74A8	0.8	7610	4970	4070	3810	3620	3480	3310
							12	16760	10950	8960	8390	7970	7670	7290
							1.6	11430	7460	6110	5720	5440	5220	4970
							23	25180	16430	13460	12600	11980	11500	10950
							2.0	13020	8490	6960	6510	6200	5940	5660
							29	28680	18700	15330	14340	13660	13080	12470
							2.4	14490	9450	7750	7250	6900	6620	6300
							35	31920	20810	17070	15970	15200	14580	13880

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
710/70 R38	DW23B DW25B	716 28.2	1985 78.1	891 35.1	5856 230.6	171D 74A8	0.8	7610	4970	4070	3810	3620	3480	3310
							12	16760	10950	8960	8390	7970	7670	7290
							1.6	11430	7460	6110	5720	5440	5220	4970
							23	25180	16430	13460	12600	11980	11500	10950
							2.0	13020	8490	6960	6510	6200	5940	5660
							29	28680	18700	15330	14340	13660	13080	12470
							2.4	14490	9450	7750	7250	6900	6620	6300
							35	31920	20810	17070	15970	15200	14580	13880

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
710/70 R38	DW23B DW25B	716 28.2	1985 78.1	891 35.1	5856 230.6	178D 81A8	0.8	7610	4970	4070	3810	3620	3480	3310
							12	16760	10950	8960	8390	7970	7670	7290
							1.4	10650	6950	5690	5320	5070	4860	4630
							20	23460	15310	12530	11720	11170	10700	10200
							1.8	12330	8040	6590	6160	5870	5630	5360
							26	27160	17710	14520	13570	12930	12400	11810
							3.2	17250	11250	9230	8630	8210	7880	7500
							46	38000	24780	20330	19010	18080	17360	16520

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
710/70 R38	DW23B DW25B	716 28.2	1985 78.1	891 35.1	5856 230.6	178D 81A8	0.8	7610	4970	4070	3810	3620	3480	3310
							12	16760	10950	8960	8390	7970	7670	7290
							1.4	10650	6950	5690	5320	5070	4860	4630
							20	23460	15310	12530	11720	11170	10700	10200
							1.8	12330	8040	6590	6160	5870	5630	5360
							26	27160	17710	14520	13570	12930	12400	11810
							3.2	17250	11250	9230	8630	8210	7880	7500
							46	38000	24780	20330	19010	18080	17360	16520

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	in	psi	Static	6	12	19	25	31	40
710/70 R42	DW23B DW25B	715 28.1	2061 81.1	932 36.7	6119 240.9	173D 76A8	0.8	7870	5130	4210	3930	3740	3590	3420
							12	17330	11300	9270	8660	8240	7910	7530
							1.2	9980	6510	5340	4990	4750	4560	4340
							17	21980	14340	11760	10990	10460	10040	9560
							1.6	11800	7700	6310	5900	5620	5390	5130
							23	25990	16960	13900	13000	12380	11870	11300
							2.0	13430	8760	7180	6720	6390	6130	5840
							29	29580	19300	15810	14800	14070	13500	12860
							2.4	14950	9750	8000	7480	7120	6830	6500
35	32930	21480	17620	16480	15680	15040	14320							

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
200/70 R16	W6	197 7.8	686 27.0	316 12.4	2037 80.2	94D	0.8	810	530	430	400	380	370	350
							12	1780	1170	950	880	840	810	770
							1.2	1040	680	550	520	490	470	450
							17	2290	1500	1210	1150	1080	1040	990
							1.8	1310	860	700	660	620	600	570
							26	2890	1890	1540	1450	1370	1320	1260
							2.4	1540	1010	820	770	730	700	670
							35	3390	2220	1810	1700	1610	1540	1480

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	in	psi	Static	6	12	19	25	31	40
240/70 R16	W8 W9	244 9.6	742 29.2	338 13.3	2215 87.2	104D 07A8	0.8	1080	710	580	540	510	490	470
							12	2380	1560	1280	1190	1120	1080	1040
							1.2	1380	900	740	690	660	630	600
							17	3040	1980	1630	1520	1450	1390	1320
							1.8	1750	1140	930	870	830	800	760
							26	3850	2510	2050	1920	1830	1760	1670
							2.4	2070	1350	1110	1040	990	950	900
							35	4560	2970	2440	2290	2180	2090	1980

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	in	psi	Static	6	12	19	25	31	40
260/70 R16	W8 W9	258 10.2	770 30.3	349 13.7	2298 90.5	109D 12A8	0.8	1240	810	660	620	590	570	540
							12	2730	1780	1450	1370	1300	1260	1190
							1.2	1590	1040	850	790	760	720	690
							17	3500	2290	1870	1740	1670	1590	1520
							1.8	2000	1310	1070	1000	950	910	870
							26	4410	2890	2360	2200	2090	2000	1920
							2.4	2370	1550	1270	1180	1130	1080	1030
							35	5220	3410	2800	2600	2490	2380	2270

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
260/70 R20	W8 W9	260 10.2	872 34.3	400 15.7	2602 102.4	113D 16A8	0.8	1400	920	750	700	670	640	610
							12	3080	2030	1650	1540	1480	1410	1340
							1.4	1930	1260	1030	970	920	880	840
							20	4250	2780	2270	2140	2030	1940	1850
							2.0	2370	1550	1270	1180	1130	1080	1030
							29	5220	3410	2800	2600	2490	2380	2270
							2.4	2650	1730	1410	1320	1260	1210	1150
							35	5840	3810	3110	2910	2780	2670	2530

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	in	psi	Static	6	12	19	25	31	40
280/70 R16	W8L W9 W10	282 11.1	798 31.4	360 14.2	2382 93.8	112D 15A8	0.8	1360	890	730	680	650	620	590
							12	3000	1960	1610	1500	1430	1370	1300
							1.4	1890	1230	1010	940	900	860	820
							20	4160	2710	2220	2070	1980	1890	1810
							2.0	2320	1520	1240	1160	1110	1060	1010
							29	5110	3350	2730	2560	2440	2330	2220
							2.4	2580	1680	1380	1290	1230	1180	1120
							35	5680	3700	3040	2840	2710	2600	2470

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
280/70 R18	W8L W9 W10	282 11.1	849 33.4	386 15.2	2534 99.8	114D 17A8	0.8	1430	930	760	710	680	650	620
							12	3150	2050	1670	1560	1500	1430	1370
							1.4	1980	1290	1060	990	940	900	860
							20	4360	2840	2330	2180	2070	1980	1890
							2.0	2440	1590	1300	1220	1160	1110	1060
							29	5370	3500	2860	2690	2560	2440	2330
							2.4	2710	1770	1450	1360	1290	1240	1180
							35	5970	3900	3190	3000	2840	2730	2600

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	in	psi	Static	6	12	19	25	31	40
280/70 R20	W8 W9 W10	290 11.4	900 35.4	411 16.2	2686 105.7	116D 19A8	0.8	1920	1250	1020	950	910	870	830
							12	4230	2750	2250	2090	2000	1920	1830
							1.0	2190	1430	1170	1090	1040	1000	950
							15	4820	3150	2580	2400	2290	2200	2090
							1.4	2670	1740	1430	1330	1270	1220	1160
							20	5880	3830	3150	2930	2800	2690	2560
							1.6	2880	1880	1540	1440	1370	1310	1250
							23	6340	4140	3390	3170	3020	2890	2750

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	in	psi	Static	6	12	19	25	31	40
300/70 R20	W9 W10	295 11.6	952 37.5	434 17.1	2826 111.3	120D 23A8	0.8	1680	1100	900	840	800	770	730
							12	3700	2420	1980	1850	1760	1700	1610
							1.8	2710	1770	1450	1360	1290	1240	1180
							26	5970	3900	3190	3000	2840	2730	2600
							2.1	2970	1940	1590	1480	1410	1350	1290
							30	6540	4270	3500	3260	3110	2970	2840
							2.4	3220	2100	1720	1610	1530	1470	1400
							35	7090	4630	3790	3550	3370	3240	3080

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	in	psi	Static	6	12	19	25	31	40
300/70 R20	W9 W10	295 11.6	952 37.5	434 17.1	2826 111.3	110D 13A8	0.8	1680	1100	900	840	800	770	730
							12	3700	2420	1980	1850	1760	1700	1610
							1.2	2070	1350	1110	1040	990	950	900
							17	4560	2970	2440	2290	2180	2090	1980
							1.4	2250	1470	1210	1130	1070	1030	980
							20	4960	3240	2670	2490	2360	2270	2160
							1.6	2440	1590	1300	1220	1160	1110	1060
							23	5370	3500	2860	2690	2560	2440	2330

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	in	psi	Static	6	12	19	25	31	40
320/70 R20	W10 W9 W11	320 12.6	982 38.7	444 17.5	2909 114.5	113D 16A8	0.8	1770	1160	950	890	840	810	770
							12	3900	2560	2090	1960	1850	1780	1700
							1.2	2230	1460	1190	1120	1060	1020	970
							17	4910	3220	2620	2470	2330	2250	2140
							1.4	2440	1590	1300	1220	1160	1110	1060
							20	5370	3500	2860	2690	2560	2440	2330
							1.6	2650	1730	1410	1320	1260	1210	1150
							23	5840	3810	3110	2910	2780	2670	2530

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
320/70 R20	W10 W9 W11	320 12.6	982 38.7	444 17.5	2909 114.5	123D 26A8	0.8	1770	1160	950	890	840	810	770
							12	3900	2560	2090	1960	1850	1780	1700
							1.8	3010	1970	1610	1510	1430	1380	1310
							26	6630	4340	3550	3330	3150	3040	2890
							2.1	3290	2150	1760	1640	1570	1500	1430
							30	7250	4740	3880	3610	3460	3300	3150
							2.4	3570	2330	1910	1780	1700	1630	1550
							35	7860	5130	4210	3920	3740	3590	3410

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
320/70 R24	W10 W9 W11	320 12.6	1095 43.1	499 19.6	3261 128.4	116D 19A8	0.8	1930	1260	1030	970	920	880	840
							12	4250	2780	2270	2140	2030	1940	1850
							1.2	2440	1590	1300	1220	1160	1110	1060
							17	5370	3500	2860	2690	2560	2440	2330
							1.4	2670	1740	1430	1330	1270	1220	1160
							20	5880	3830	3150	2930	2800	2690	2560
							1.6	2880	1880	1540	1440	1370	1310	1250
							23	6340	4140	3390	3170	3020	2890	2750

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)												
		SW	OD					Speed,km/h(mph)												
								Tractor Application												
								mm	mm	mm	mm	mm	mm	mm	bar	Static	10	20	30	40
		in	in					in	in	in	in	in	psi	Static	6	12	19	25	31	40
320/70 R28	W10 W9 W11	320 12.6	1190 46.9	548 21.6	3563 140.3	119D 22A8	0.8	2090	1370	1120	1050	1000	960	910						
							12	4600	3020	2470	2310	2200	2110	2000						
							1.2	2650	1730	1410	1320	1260	1210	1150						
							17	5840	3810	3110	2910	2780	2670	2530						
							1.4	2900	1890	1550	1450	1380	1320	1260						
							20	6390	4160	3410	3190	3040	2910	2780						
							1.6	3130	2040	1670	1560	1490	1430	1360						
							23	6890	4490	3680	3440	3280	3150	3000						

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
360/70 R20	W11 W12 W10	360 14.2	1042 41.0	468 18.4	3074 121.0	120D 23A8	0.8	2140	1400	1140	1070	1020	980	930
							12	4710	3080	2510	2360	2250	2160	2050
							1.0	2440	1590	1300	1220	1160	1110	1060
							15	5370	3500	2860	2690	2560	2440	2330
							1.2	2710	1770	1450	1360	1290	1240	1180
							17	5970	3900	3190	3000	2840	2730	2600
							1.6	3220	2100	1720	1610	1530	1470	1400
							23	7090	4630	3790	3550	3370	3240	3080

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	in	psi	Static	6	12	19	25	31	40
360/70 R20	W11 W12 W10	360 14.2	1042 41.0	468 18.4	3074 121.0	129D 32A8	0.8	2140	1400	1140	1070	1020	980	930
							12	4710	3080	2510	2360	2250	2160	2050
							1.4	3110	2030	1660	1550	1480	1420	1350
							20	6850	4470	3660	3410	3260	3130	2970
							2.0	3820	2490	2040	1910	1820	1740	1660
							29	8410	5480	4490	4210	4010	3830	3660
							2.4	4260	2780	2280	2130	2030	1940	1850
							35	9380	6120	5020	4690	4470	4270	4070

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	in	psi	Static	6	12	19	25	31	40
360/70 R24	W11 W12 W10	360 14.2	1152 45.4	522 20.6	3420 134.6	122D 25A8	0.8	2300	1500	1230	1150	1100	1050	1000
							12	5070	3300	2710	2530	2420	2310	2200
							1.0	2620	1710	1400	1310	1250	1200	1140
							15	5770	3770	3080	2890	2750	2640	2510
							1.4	3200	2090	1710	1600	1520	1460	1390
							20	7050	4600	3770	3520	3350	3220	3060
							1.6	3450	2250	1850	1730	1640	1580	1500
							23	7600	4960	4070	3810	3610	3480	3300

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
in	in	in	in	in	in	in	psi	Static	6	12	19	25	31	40
360/70 R28	W11 W12 W10	360 14.2	1251 49.3	572 22.5	3734 147.0	125D 28A8	0.8	2530	1650	1350	1270	1200	1160	1100
							12	5570	3630	2970	2800	2640	2560	2420
							1.2	3220	2100	1720	1610	1530	1470	1400
							17	7090	4630	3790	3550	3370	3240	3080
							1.4	3520	2300	1880	1760	1680	1610	1530
							20	7750	5070	4140	3880	3700	3550	3370
							1.6	3800	2480	2030	1900	1810	1730	1650
							23	8370	5460	4470	4190	3990	3810	3630

FEATURES AND BENEFITS

R1-W tread depth
Longer tyre life



Higher angle and lug
overlap at centre
Better roadability



Wider tread
larger inner volume
Reduced soil
compaction



Rounded shoulder
Lesser damage to
soil and crop



Lower angle at
shoulder
Superior traction

80/85/90 SERIES AGRI RADIAL

TRA CODE : R-1W



FARMAX

R80

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
480/80 R26 (18.4 R26)	DW16L DW14L DW15L	485 19.1	1428 56.2	638 25.1	4217 166	143D 46A8	0.8	4030	2630	2150	2010	1920	1840	1750
							12	8880	5790	4740	4430	4230	4050	3850
							1	4600	3000	2460	2300	2190	2100	2000
							15	10130	6610	5420	5070	4820	4630	4410
							1.2	5150	3360	2760	2580	2450	2350	2240
							17	11340	7400	6080	5680	5400	5180	4930
							1.3	5750	3750	3080	2880	2740	2630	2500
							19	12670	8260	6780	6340	6040	5790	5510
							1.6	6270	4090	3350	3130	2980	2860	2725
							23	13810	9010	7380	6890	6560	6300	6000

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
480/80 R42	DW16L DW14L DW15L	485 19.1	1835 72.2	848 33.4	5472 215.4	151D 54A8	0.8	5010	3270	2680	2510	2390	2290	2180
							12	11040	7200	5900	5530	5260	5040	4800
							1.0	5750	3750	3080	2880	2740	2630	2500
							15	12670	8260	6780	6340	6040	5790	5510
							1.2	6440	4200	3440	3220	3070	2940	2800
							17	14190	9250	7580	7090	6760	6480	6170
							1.4	7250	4730	3870	3620	3450	3310	3150
							20	15970	10420	8520	7970	7600	7290	6940
							1.6	7940	5180	4240	3970	3780	3620	3450
							23	17490	11410	9340	8740	8330	7970	7600

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
480/80 R42	DW16L DW14L DW15L	485 19.1	1835 72.2	848 33.4	5472 215.4	153D 56A8	0.8	5010	3270	2680	2510	2390	2290	2180
							12	11040	7200	5900	5530	5260	5040	4800
							1.0	5750	3750	3080	2880	2740	2630	2500
							15	12670	8260	6780	6340	6040	5790	5510
							1.3	6900	4500	3690	3450	3290	3150	3000
							19	15200	9910	8130	7600	7250	6940	6610
							1.6	7940	5180	4240	3970	3780	3620	3450
							23	17490	11410	9340	8740	8330	7970	7600
							1.8	8400	5480	4490	4200	4000	3830	3650
							26	18500	12070	9890	9250	8810	8440	8040

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
480/80 R42/3	DW16L DW14L DW15L	485 19.1	1835 72.2	848 33.4	5472 215.4	169D 72A8	0.8	5010	3270	2680	2510	2390	2290	2180
							12	11040	7200	5900	5530	5260	5040	4800
							2.0	8630	5630	4610	4310	4110	3940	3750
							29	19010	12400	10150	9490	9050	8680	8260
							2.8	10060	6560	5380	5030	4790	4590	4375
							41	22160	14450	11850	11080	10550	10110	9640
							3.4	11210	7310	6000	5610	5340	5120	4875
							49	24690	16100	13220	12360	11760	11280	10740
							4.4	13340	8700	7130	6670	6350	6090	5800
							64	29380	19160	15700	14690	13990	13410	12780

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
480/80 R46	DW16L DW14L DW15L	485 19.1	1940 76.4	900 35.4	5800 228.3	158D 61A8	0.8	5290	3450	2830	2650	2520	2420	2300
							12	11650	7600	6230	5840	5550	5330	5070
							1.2	6670	4350	3570	3340	3180	3050	2900
							17	14690	9580	7860	7360	7000	6720	6390
							1.6	8170	5330	4370	4080	3890	3730	3550
							23	18000	11740	9630	8990	8570	8220	7820
							2.0	8910	5810	4770	4460	4240	4070	3875
							29	19630	12800	10510	9820	9340	8960	8540
							2.4	9780	6380	5230	4890	4650	4460	4250
							35	21540	14050	11520	10770	10240	9820	9360

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
480/80 R46	DW16L DW14L DW15L	485 19.1	1940 76.4	900 35.4	5800 228.3	164D 67A8	0.8	5290	3450	2830	2650	2520	2420	2300
							12	11650	7600	6230	5840	5550	5330	5070
							1.4	7480	4880	4000	3740	3560	3430	3250
							20	16480	10750	8810	8240	7840	7560	7160
							2.2	9490	6190	5070	4740	4520	4330	4125
							32	20900	13630	11170	10440	9960	9540	9090
							2.8	10640	6940	5690	5320	5060	4860	4625
							41	23440	15290	12530	11720	11150	10700	10190
							3.2	11500	7500	6150	5750	5480	5250	5000
							46	25330	16520	13550	12670	12070	11560	11010

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
380/80 R38	W12 W11 W13	380 15.0	1573 61.9	726 28.6	4793 188.7	154D 57A8	0.8	3270	2130	1750	1630	1550	1490	1420
							12	7200	4690	3850	3590	3410	3280	3130
							2.0	5590	3650	2990	2790	2660	2550	2430
							29	12310	8040	6590	6150	5860	5620	5350
							3.2	7360	4800	3940	3680	3500	3360	3200
							46	16210	10570	8680	8110	7710	7400	7050
							4.2	8630	5630	4610	4310	4110	3940	3750
							61	19010	12400	10150	9490	9050	8680	8260

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
420/80 R46	W13 W12	418 16.5	1840 72.4	853 33.6	5607 220.7	151D 54A8	0.8	4160	2720	2230	2080	1980	1900	1810
							12	9160	5990	4910	4580	4360	4190	3990
							1.2	5290	3450	2830	2650	2520	2420	2300
							17	11650	7600	6230	5840	5550	5330	5070
							1.8	6690	4370	3580	3350	3190	3060	2910
							26	14740	9630	7890	7380	7030	6740	6410
							2.0	7130	4650	3810	3570	3390	3260	3100
							29	15700	10240	8390	7860	7470	7180	6830
							2.4	7940	5150	4240	3970	3780	3620	3450
							35	17490	11340	9340	8740	8330	7970	7600

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
420/80 R46	W13 W12	418 16.5	1840 72.4	853 33.6	5607 220.7	159D 62A8	0.8	4160	2710	2230	2080	1980	1900	1810
							12	9160	5970	4910	4580	4360	4190	3990
							1.6	6260	4080	3350	3130	2980	2860	2720
							23	13790	8990	7380	6890	6560	6300	5990
							2.2	7540	4920	4030	3770	3590	3440	3280
							32	16610	10840	8880	8300	7910	7580	7220
							3.0	9040	5900	4830	4520	4300	4130	3930
							44	19910	13000	10640	9960	9470	9100	8660
							3.6	10060	6560	5380	5030	4790	4590	4375
							52	22160	14450	11850	11080	10550	10110	9640



FARMAX R85

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
								Tractor Application						
		SW	OD					Static	10	20	30	40	50	
		mm	mm	mm	mm	mm	bar	Static	6	12	19	25	31	
		in	in	in	in	in	psi	Static						
180/85 R12	4.00E	157 6.2	630 24.8	286 11.3	1884 74.2	80A8/B	0.8	690	450	370	350	300	300	
							12	1520	990	810	770	660	660	
							1	780	510	420	390	340	340	
							15	1720	1120	930	860	750	750	
							1.3	920	600	490	460	400	400	
							19	2030	1320	1080	1010	880	880	
							1.6	1040	680	550	520	450	450	
							23	2290	1500	1210	1150	990	990	

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
								Tractor Application						
		SW	OD					Static	10	20	30	40	50	65
		mm	mm	mm	mm	mm	bar	Static	6	12	19	25	31	40
		in	in	in	in	in	psi	Static						
250/85 R20	W8 W7 W9	250 9.8	933 36.7	424 16.7	2790 109.8	116D 19A8	0.8	1520	990	810	760	720	690	660
							12	3350	2180	1780	1670	1590	1520	1450
							1.4	2090	1370	1120	1050	1000	960	910
							20	4600	3020	2470	2310	2200	2110	2000
							2.0	2580	1680	1380	1290	1230	1180	1120
							29	5680	3700	3040	2840	2710	2600	2470
							2.4	2880	1880	1540	1440	1370	1310	1250
							35	6340	4140	3390	3170	3020	2890	2750

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
								Tractor Application						
		SW	OD					Static	10	20	30	40	50	65
		mm	mm	mm	mm	mm	bar	Static	6	12	19	25	31	40
		in	in	in	in	in	psi	Static						
250/85 R24	W8 W7 W9	250 9.8	1036 40.8	477 18.8	3092 121.7	109D 12A8	0.8	1590	1040	850	790	760	720	690
							12	3500	2290	1870	1740	1670	1590	1520
							1.2	2000	1310	1070	1000	950	910	870
							17	4410	2890	2360	2200	2090	2000	1920
							1.4	2190	1430	1170	1090	1040	1000	950
							20	4820	3150	2580	2400	2290	2200	2090
							1.6	2370	1550	1270	1180	1130	1080	1030
							23	5220	3410	2800	2600	2490	2380	2270

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
250/85 R28	W8 W7 W9	250 9.8	1137 44.8	526 20.7	3401 133.9	112D 15A8	0.8	1730	1130	920	860	820	790	750
							12	3810	2490	2030	1890	1810	1740	1650
							1.0	1960	1280	1050	980	930	890	850
							15	4320	2820	2310	2160	2050	1960	1870
							1.3	2280	1490	1220	1140	1080	1040	990
							19	5020	3280	2690	2510	2380	2290	2180
							1.6	2580	1680	1380	1290	1230	1180	1120
							23	5680	3700	3040	2840	2710	2600	2470

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
280/85 R20	W10 W9	285 11.2	984 38.7	445 17.5	2937 115.6	112D 15A8	0.8	1730	1130	920	860	820	790	750
							12	3810	2490	2030	1890	1810	1740	1650
							1.2	2190	1430	1170	1090	1040	1000	950
							17	4820	3150	2580	2400	2290	2200	2090
							1.4	2390	1560	1280	1200	1140	1090	1040
							20	5260	3440	2820	2640	2510	2400	2290
							1.6	2580	1680	1380	1290	1230	1180	1120
							23	5680	3700	3040	2840	2710	2600	2470

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
280/85 R20	W10 W9	285 11.2	984 38.7	445 17.5	2937 115.6	112D 15A8	0.8	1730	1130	920	860	820	790	750
							12	3810	2490	2030	1890	1810	1740	1650
							1.2	2190	1430	1170	1090	1040	1000	950
							17	4820	3150	2580	2400	2290	2200	2090
							1.4	2390	1560	1280	1200	1140	1090	1040
							20	5260	3440	2820	2640	2510	2400	2290
							1.6	2580	1680	1380	1290	1230	1180	1120
							23	5680	3700	3040	2840	2710	2600	2470

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
280/85 R24	W10 W9	285 11.2	1086 42.8	496 19.5	3235 127.4	112D 15A8	0.8	1840	1200	980	920	880	840	800
							12	4050	2640	2160	2030	1940	1850	1760
							1.2	2350	1530	1250	1170	1120	1070	1020
							17	5180	3370	2750	2580	2470	2360	2250
							1.4	2580	1680	1380	1290	1230	1180	1120
							20	5680	3700	3040	2840	2710	2600	2470
							1.6	2790	1820	1490	1400	1330	1280	1215
							23	6150	4010	3280	3080	2930	2820	2680

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
280/85 R28	W10 W9	285 11.2	1187 46.7	546 21.5	3552 139.8	118D 21A8	0.8	2020	1320	1080	1010	960	920	880
							12	4450	2910	2380	2220	2110	2030	1940
							1.2	2550	1670	1370	1280	1220	1170	1110
							17	5620	3680	3020	2820	2690	2580	2440
							1.4	2810	1830	1500	1400	1340	1280	1220
							20	6190	4030	3300	3080	2950	2820	2690
							1.6	3040	1980	1620	1520	1450	1390	1320
							23	6700	4360	3570	3350	3190	3060	2910

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
320/85 R20	W11 W10 W9	320 12.6	1052 41.4	472 18.6	3123 123.0	119D 22A8	0.8	2090	1370	1120	1050	1000	960	910
							12	4600	3020	2470	2310	2200	2110	2000
							1.2	2650	1730	1410	1320	1260	1210	1150
							17	5840	3810	3110	2910	2780	2670	2530
							1.4	2900	1890	1550	1450	1380	1320	1260
							20	6390	4160	3410	3190	3040	2910	2780
							1.6	3130	2040	1670	1560	1490	1430	1360
							23	6890	4490	3680	3440	3280	3150	3000

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
320/85 R24	W11 W10 W9	325 12.8	1154 45.4	523 20.6	3444 135.6	122D 25A8	0.8	2300	1500	1230	1150	1100	1050	1000
							12	5070	3300	2710	2530	2420	2310	2200
							1.2	2920	1910	1560	1460	1390	1330	1270
							17	6430	4210	3440	3220	3060	2930	2800
							1.4	3200	2090	1710	1600	1520	1460	1390
							20	7050	4600	3770	3520	3350	3220	3060
							1.6	3450	2250	1850	1730	1640	1580	1500
							23	7600	4960	4070	3810	3610	3480	3300

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)										
								Speed,km/h(mph)										
		SW	OD					Tractor Application										
		mm	mm					mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in					in	in	in	in	psi	Static	6	12	19	25	31
320/85 R24	W11 W10 W9	325 12.8	1154 45.4	523 20.6	3444 135.6	142D 45A8	0.8	2300	1500	1230	1150	1100	1050	1000				
							12	5070	3300	2710	2530	2420	2310	2200				
							2.2	4160	2720	2230	2080	1980	1900	1810				
							32	9160	5990	4910	4580	4360	4190	3990				
							3.2	5180	3380	2770	2590	2460	2360	2250				
							46	11410	7440	6100	5700	5420	5200	4960				
							4.2	6100	3980	3260	3050	2900	2780	2650				
							61	13440	8770	7180	6720	6390	6120	5840				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
320/85 R28	W11 W10 W9	325 12.8	1255 49.4	574 22.6	3746 147.5	124D 27A8	0.8	2460	1610	1320	1230	1170	1120	1070
							12	5420	3550	2910	2710	2580	2470	2360
							1.0	2810	1830	1500	1400	1340	1280	1220
							15	6190	4030	3300	3080	2950	2820	2690
							1.3	3270	2130	1750	1630	1550	1490	1420
							19	7200	4690	3850	3590	3410	3280	3130
							1.6	3680	2400	1970	1840	1750	1680	1600
							23	8110	5290	4340	4050	3850	3700	3520

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
320/85 R32	W11 W10 W9	325 12.8	1357 53.4	625 24.6	4063 160.0	126D 29A8	0.8	2620	1710	1400	1310	1250	1200	1140
							12	5770	3770	3080	2890	2750	2640	2510
							1.0	2990	1950	1600	1500	1420	1370	1300
							15	6590	4300	3520	3300	3130	3020	2860
							1.3	3470	2270	1860	1740	1650	1590	1510
							19	7640	5000	4100	3830	3630	3500	3330
							1.6	3910	2550	2090	1960	1860	1790	1700
							23	8610	5620	4600	4320	4100	3940	3740

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)										
								Speed,km/h(mph)										
		SW	OD					Tractor Application										
		mm	mm					mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in					in	in	in	psi	Static	6	12	19	25	31	40
320/85 R32	W11 W10 W9	325 12.8	1357 53.4	625 24.6	4063 160.0	142D 45A8	0.8	2620	1710	1400	1310	1250	1200	1140				
							12	5770	3770	3080	2890	2750	2640	2510				
							2.2	4300	2810	2300	2150	2050	1960	1870				
							32	9470	6190	5070	4740	4520	4320	4120				
							3.2	5360	3500	2870	2680	2550	2450	2330				
							46	11810	7710	6320	5900	5620	5400	5130				
							4.0	6100	3980	3260	3050	2900	2780	2650				
							58	13440	8770	7180	6720	6390	6120	5840				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
320/85 R32/3	W11 W10 W9	325 12.8	1357 53.4	625 24.6	4063 160.0	145D 48A8	0.8	2620	1710	1400	1310	1250	1200	1140
							12	5770	3770	3080	2890	2750	2640	2510
							2.0	4210	2750	2250	2100	2000	1920	1830
							29	9270	6060	4960	4630	4410	4230	4030
							3.0	5340	3480	2850	2670	2540	2440	2320
							44	11760	7670	6280	5880	5590	5370	5110
							4.4	6670	4350	3570	3340	3180	3050	2900
							64	14690	9580	7860	7360	7000	6720	6390

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
320/85 R34	W11 W10 W9	325 12.8	1408 55.4	650 25.6	4215 165.9	141D 44A8	0.8	2480	1620	1330	1240	1180	1130	1080
							12	5460	3570	2930	2730	2600	2490	2380
							1.8	3960	2580	2120	1980	1880	1810	1720
							26	8720	5680	4670	4360	4140	3990	3790
							2.7	5010	3270	2680	2510	2390	2290	2180
							39	11040	7200	5900	5530	5260	5040	4800
							3.6	5920	3860	3170	2960	2820	2700	2575
							52	13040	8500	6980	6520	6210	5950	5670

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
320/85 R36	W11 W10 W9	325 12.8	1458 57.4	675 26.6	4361 171.7	128D 31A8	0.8	2740	1790	1460	1370	1300	1250	1190
							12	6040	3940	3220	3020	2860	2750	2620
							1.0	3130	2040	1670	1560	1490	1430	1360
							15	6890	4490	3680	3440	3280	3150	3000
							1.3	3660	2390	1960	1830	1740	1670	1590
							19	8060	5260	4320	4030	3830	3680	3500
							1.6	4140	2700	2210	2070	1970	1890	1800
							23	9120	5950	4870	4560	4340	4160	3960

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
320/85 R38	W11 W10 W9	325 12.8	1509 59.4	701 27.6	4518 177.9	143D 46A8	0.8	2600	1700	1390	1300	1240	1190	1130
							12	5730	3740	3060	2860	2730	2620	2490
							1.8	4160	2720	2230	2080	1980	1900	1810
							26	9160	5990	4910	4580	4360	4190	3990
							2.6	5180	3380	2770	2590	2460	2360	2250
							38	11410	7440	6100	5700	5420	5200	4960
							3.6	6270	4090	3350	3130	2980	2860	2725
							52	13810	9010	7380	6890	6560	6300	6000

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
340/85 R24	W12 W11	355 14.0	1188 46.8	542 21.3	3528 138.9	125D 28A8	0.8	2530	1650	1350	1270	1200	1160	1100
							12	5570	3630	2970	2800	2640	2560	2420
							1.0	2880	1880	1540	1440	1370	1310	1250
							15	6340	4140	3390	3170	3020	2890	2750
							1.3	3360	2190	1800	1680	1600	1530	1460
							19	7400	4820	3960	3700	3520	3370	3220
							1.6	3800	2480	2030	1900	1810	1730	1650
							23	8370	5460	4470	4190	3990	3810	3630

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
340/85 R24	W12 W11	355 14.0	1188 46.8	542 21.3	3528 138.9	125D 28A8	0.8	2530	1650	1350	1270	1200	1160	1100
							12	5570	3630	2970	2800	2640	2560	2420
							1.0	2880	1880	1540	1440	1370	1310	1250
							15	6340	4140	3390	3170	3020	2890	2750
							1.3	3360	2190	1800	1680	1600	1530	1460
							19	7400	4820	3960	3700	3520	3370	3220
							1.6	3800	2480	2030	1900	1810	1730	1650
							23	8370	5460	4470	4190	3990	3810	3630

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
340/85 R28	W12 W11	355 14.0	1289 50.7	592 23.3	3847 151.5	127D 30A8	0.8	2690	1760	1440	1350	1280	1230	1170
							12	5930	3880	3170	2970	2820	2710	2580
							1.0	3060	2000	1640	1530	1460	1400	1330
							15	6740	4410	3610	3370	3220	3080	2930
							1.3	3570	2330	1910	1780	1700	1630	1550
							19	7860	5130	4210	3920	3740	3590	3410
							1.6	4030	2630	2150	2010	1920	1840	1750
							23	8880	5790	4740	4430	4230	4050	3850

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
340/85 R36	W12 W11	355 14.0	1492 58.7	694 27.3	4453 175.3	132D 35A8	0.8	3060	2000	1640	1530	1460	1400	1330
							12	6740	4410	3610	3370	3220	3080	2930
							1.0	3500	2280	1870	1750	1660	1600	1520
							15	7710	5020	4120	3850	3660	3520	3350
							1.3	4070	2660	2180	2040	1940	1860	1770
							19	8960	5860	4800	4490	4270	4100	3900
							1.6	4600	3000	2460	2300	2190	2100	2000
							23	10130	6610	5420	5070	4820	4630	4410

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm					Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
340/85 R38	W12 W11	355 14.0	1543 60.7	719 28.3	4620 181.9	133D 35A8	0.8	3150	2060	1690	1580	1500	1440	1370
							12	6940	4540	3720	3480	3300	3170	3020
							1.0	3590	2340	1920	1710	1710	1640	1560
							15	7910	5150	4230	3770	3770	3610	3440
							1.3	4190	2730	2240	2090	1990	1910	1820
							19	9230	6010	4930	4600	4380	4210	4010
							1.6	4740	3090	2530	2370	2260	2160	2060
							23	10440	6810	5570	5220	4980	4760	4540

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm					Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
340/85 R38	W12 W11	355 14.0	1543 60.7	719 28.3	4620 181.9	148D 51A8	0.8	3150	2060	1690	1580	1500	1440	1370
							12	6940	4540	3720	3480	3300	3170	3020
							2.2	5110	3330	2730	2550	2430	2330	2220
							32	11260	7330	6010	5620	5350	5130	4890
							3.2	6350	4140	3390	3170	3020	2900	2760
							46	13990	9120	7470	6980	6650	6390	6080
							4.0	7250	4730	3870	3620	3450	3310	3150
							58	15970	10420	8520	7970	7600	7290	6940

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm					Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
340/85 R38/3	W12 W11	355 14.0	1543 60.7	719 28.3	4620 181.9	151D 54A8	0.8	3150	2060	1690	1580	1500	1440	1370
							12	6940	4540	3720	3480	3300	3170	3020
							2.0	4950	3230	2640	2470	2350	2260	2150
							29	10900	7110	5810	5440	5180	4980	4740
							3.0	6260	4080	3350	3130	2980	2860	2720
							44	13790	8990	7380	6890	6560	6300	5990
							4.5	7940	5180	4240	3970	3780	3620	3450
							65	17490	11410	9340	8740	8330	7970	7600

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm					Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
380/85 R24	W12 W13 W11	385 15.2	1260 49.6	571 22.5	3728 146.8	131D 34A8	0.8	2990	1950	1600	1500	1420	1370	1300
							12	6590	4300	3520	3300	3130	3020	2860
							1.0	3400	2220	1820	1700	1620	1550	1480
							15	7490	4890	4010	3740	3570	3410	3260
							1.3	3980	2600	2130	1990	1890	1820	1730
							19	8770	5730	4690	4380	4160	4010	3810
							1.6	4490	2930	2400	2240	2140	2050	1950
							23	9890	6450	5290	4930	4710	4520	4300

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)										
								Speed,km/h(mph)										
		SW	OD					Tractor Application										
		mm	mm					mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in					in	in	in	in	psi	Static	6	12	19	25	31
380/85 R28	W12 W13 W11	390 15.4	1357 53.4	620 24.4	4035 158.9	133D 36A8	0.8	3150	2060	1690	1580	1500	1440	1370				
							12	6940	4540	3720	3480	3300	3170	3020				
							1.0	3590	2340	1920	1790	1710	1640	1560				
							15	7910	5150	4230	3940	3770	3610	3440				
							1.3	4190	2730	2240	2090	1990	1910	1820				
							19	9230	6010	4930	4600	4380	4210	4010				
							1.6	4740	3090	2530	2370	2260	2160	2060				
							23	10440	6810	5570	5220	4980	4760	4540				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
								Tractor Application							
		SW	OD												
		mm	mm					mm	mm	mm	bar	Static	10	20	30
in	in	in	in	in	in	psi	Static	6	12	19	25	31	40		
380/85 R30	W12 W13	385 15.2	1408 55.4	646 25.4	4195 165.2	135D 38A8	0.8	3360	2190	1800	1680	1600	1530	1460	
							12	7400	4820	3960	3700	3520	3370	3220	
							1.2	4260	2780	2280	2130	2030	1940	1850	
							17	9380	6120	5020	4690	4470	4270	4070	
							1.4	4650	3030	2480	2320	2210	2120	2020	
							20	10240	6670	5460	5110	4870	4670	4450	
							1.6	5010	3270	2680	2510	2390	2290	2180	
							23	11040	7200	5900	5530	5260	5040	4800	

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
380/85 R34	W12 W13 W11	385 15.2	1510 59.4	697 27.4	4516 177.8	137D 40A8	0.8	3540	2310	1890	1770	1690	1620	1540
							12	7800	5090	4160	3900	3720	3570	3390
							1.2	4490	2930	2400	2240	2140	2050	1950
							17	9890	6450	5290	4930	4710	4520	4300
							1.4	4900	3200	2620	2450	2330	2240	2130
							20	10790	7050	5770	5400	5130	4930	4690
							1.6	5290	3450	2830	2650	2520	2420	2300
							23	11650	7600	6230	5840	5550	5330	5070

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
420/85 R24	W15 W13 W14	450 17.7	1324 52.1	597 23.5	3931 154.8	137D 40A8	0.8	3540	2310	1890	1770	1690	1620	1540
							12	7800	5090	4160	3900	3720	3570	3390
							1.2	4490	2930	2400	2240	2140	2050	1950
							17	9890	6450	5290	4930	4710	4520	4300
							1.4	4900	3200	2620	2450	2330	2240	2130
							20	10790	7050	5770	5400	5130	4930	4690
							1.6	5290	3450	2830	2650	2520	2420	2300
							23	11650	7600	6230	5840	5550	5330	5070

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)										
								Speed,km/h(mph)										
		SW	OD					Tractor Application										
		mm	mm					mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in					in	in	in	psi	Static	6	12	19	25	31	40
420/85 R26	W15L W14L W13	438 17.2	1384 54.5	627 24.7	4131 162.6	138D 41A8	0.8	3450	2250	1850	1730	1640	1580	1500				
							12	7600	4960	4070	3810	3610	3480	3300				
							1.0	3910	2550	2090	1960	1860	1790	1700				
							15	8610	5620	4600	4320	4100	3940	3740				
							1.2	4580	2990	2450	2290	2180	2090	1990				
							17	10090	6590	5400	5040	4800	4600	4380				
							1.6	5430	3540	2900	2710	2580	2480	2360				
							23	11960	7800	6390	5970	5680	5460	5200				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)										
								Speed,km/h(mph)										
		SW	OD					Tractor Application										
		mm	mm					mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in					in	in	in	psi	Static	6	12	19	25	31	40
420/85 R28	W15L W14L W13	450 17.7	1425 56.1	648 25.5	4253 167.4	139D 42A8	0.8	3700	2420	1980	1850	1760	1690	1610				
							12	8150	5330	4360	4070	3880	3720	3550				
							1.0	4230	2760	2260	2120	2010	1930	1840				
							15	9320	6080	4980	4670	4430	4250	4050				
							1.3	4950	3230	2640	2470	2350	2260	2150				
							19	10900	7110	5810	5440	5180	4980	4740				
							1.6	5590	3650	2990	2790	2660	2550	2430				
							23	12310	8040	6590	6150	5860	5620	5350				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
420/85 R30	W15L W13L W14L	450 17.7	1476 58.1	673 26.5	4405 173.4	147D 50A8	0.8	3840	2510	2050	1920	1830	1750	1670
							12	8460	5530	4520	4230	4030	3850	3680
							1.6	5750	3750	3080	2880	2740	2630	2500
							23	12670	8260	6780	6340	6040	5790	5510
							2.0	6560	4280	3510	3280	3120	2990	2850
							29	14450	9430	7730	7220	6870	6590	6280
							2.4	7070	4610	3780	3540	3370	3230	3075
							35	15570	10150	8330	7800	7420	7110	6770

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)										
								Speed,km/h(mph)										
		SW	OD					Tractor Application										
		mm	mm					mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in					in	in	in	psi	Static	6	12	19	25	31	40
420/85 R30	W15L W13L W14L	450 17.7	1476 58.1	673 26.5	4405 173.4	140D 43A8	0.8	3840	2510	2050	1920	1830	1750	1670				
							12	8460	5530	4520	4230	4030	3850	3680				
							1.0	4370	2850	2340	2190	2080	2000	1900				
							15	9630	6280	5150	4820	4580	4410	4190				
							1.3	5080	3320	2720	2540	2420	2320	2210				
							19	11190	7310	5990	5590	5330	5110	4870				
							1.6	5750	3750	3080	2880	2740	2630	2500				
							23	12670	8260	6780	6340	6040	5790	5510				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)										
								Speed,km/h(mph)										
		SW	OD					Tractor Application										
		mm	mm					mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in					in	in	in	in	psi	Static	6	12	19	25	31
420/85 R34	W15L W14L W13	450 17.7	1578 62.1	725 28.5	4705 185.2	142D 45A8	0.8	3910	2550	2090	1960	1860	1790	1700				
							12	8610	5620	4600	4320	4100	3940	3740				
							1.2	5010	3270	2680	2510	2390	2290	2180				
							17	11040	7200	5900	5530	5260	5040	4800				
							1.4	5590	3650	2990	2790	2660	2550	2430				
							20	12310	8040	6590	6150	5860	5620	5350				
							1.6	6100	3980	3260	3050	2900	2780	2650				
							23	13440	8770	7180	6720	6390	6120	5840				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
		Speed,km/h(mph)													
		Tractor Application													
		SW	OD												
		mm	mm					mm	mm	mm	bar	Static	10	20	30
in	in	in	in	in	in	psi	Static	6	12	19	25	31	40		
420/85 R34	W15L W14L W13	450 17.7	1578 62.1	725 28.5	4705 185.2	147D 50A8	0.8	3910	2550	2090	1960	1860	1790	1700	
							12	8610	5620	4600	4320	4100	3940	3740	
							1.4	5590	3650	2990	2790	2660	2550	2430	
							20	12310	8040	6590	6150	5860	5620	5350	
							2.0	6670	4350	3570	3340	3180	3050	2900	
							29	14690	9580	7860	7360	7000	6720	6390	
							2.4	7070	4610	3780	3540	3370	3230	3075	
							35	15570	10150	8330	7800	7420	7110	6770	

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)												
		Speed,km/h(mph)																		
		Tractor Application																		
		SW	OD					mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		mm	mm											Static	6	12	19	25	31	40
in	in	in	in	in	in	in	psi	Static	6	12	19	25	31	40						
420/85 R38	W15L W14L W13	450 17.7	1680 66.1	775 30.5	5026 197.9	144D 47A8	0.8	4300	2810	2300	2150	2050	1960	1870						
							12	9470	6190	5070	4740	4520	4320	4120						
							1.0	4900	3200	2620	2450	2330	2240	2130						
							15	10790	7050	5770	5400	5130	4930	4690						
							1.3	5700	3720	3050	2850	2720	2600	2480						
							19	12560	8190	6720	6280	5990	5730	5460						
							1.6	6440	4200	3440	3220	3070	2940	2800						
							23	14190	9250	7580	7090	6760	6480	6170						

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)										
								Speed,km/h(mph)										
		SW	OD					Tractor Application										
		mm	mm					mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in					in	in	in	psi	Static	6	12	19	25	31	40
460/85 R30	W15L W16L W14L	480 18.9	1544 60.8	701 27.6	4584 180.5	145D 48A8	0.8	4440	2900	2370	2220	2110	2030	1930				
							12	9780	6390	5220	4890	4650	4470	4250				
							1.2	5640	3680	3010	2820	2680	2570	2450				
							17	12420	8110	6630	6210	5900	5660	5400				
							1.4	6160	4020	3300	3080	2930	2810	2680				
							20	13570	8850	7270	6780	6450	6190	5900				
							1.6	6670	4350	3570	3340	3180	3050	2900				
							23	14690	9580	7860	7360	7000	6720	6390				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
460/85 R34	W15L W16L W14L	480 18.9	1646 64.8	752 29.6	4895 192.7	147D 50A8	0.8	4720	3080	2520	2360	2240	2150	2050
							12	10400	6780	5550	5200	4930	4740	4520
							1.2	5980	3900	3200	2990	2850	2730	2600
							17	13170	8590	7050	6590	6280	6010	5730
							1.4	6530	4260	3490	3270	3110	2980	2840
							20	14380	9380	7690	7200	6850	6560	6260
							1.6	7070	4610	3780	3540	3370	3230	3075
							23	15570	10150	8330	7800	7420	7110	6770

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
460/85 R34	W15L W16L W14L	480 18.9	1646 64.8	752 29.6	4895 192.7	157D 60A8	0.8	4720	3080	2520	2360	2240	2150	2050
							12	10400	6780	5550	5200	4930	4740	4520
							2.2	7910	5160	4230	3960	3770	3610	3440
							32	17420	11370	9320	8720	8300	7950	7580
							2.8	9110	5940	4870	4550	4340	4160	3960
							41	20070	13080	10730	10020	9560	9160	8720
							3.0	9490	6190	5070	4740	4520	4330	4125
							44	20900	13630	11170	10440	9960	9540	9090

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
460/85 R38	W15L W16L W14L	480 18.9	1747 68.8	796 31.3	5214 205.3	149D 52A8	0.8	4990	3260	2670	2500	2380	2280	2170
							12	10990	7180	5880	5510	5240	5020	4780
							1.2	6330	4130	3380	3160	3010	2890	2750
							17	13940	9100	7440	6960	6630	6370	6060
							1.4	6920	4520	3700	3460	3300	3160	3010
							20	15240	9960	8150	7620	7270	6960	6630
							1.6	7480	4880	4000	3740	3560	3410	3250
							23	16480	10750	8810	8240	7840	7510	7160

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
460/85 R38	W15L W16L W14L	480 18.9	1747 68.8	796 31.3	5214 205.3	153D 56A8	0.8	4990	3260	2670	2500	2380	2280	2170
							12	10990	7180	5880	5510	5240	5020	4780
							1.2	6330	4130	3380	3160	3010	2890	2750
							17	13940	9100	7440	6960	6630	6370	6060
							1.6	7480	4880	4000	3740	3560	3410	3250
							23	16480	10750	8810	8240	7840	7510	7160
							2.4	8400	5480	4490	4200	4000	3830	3650
							35	18500	12070	9890	9250	8810	8440	8040

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)								
								Speed,km/h(mph)								
								Tractor Application								
		SW	OD													
		mm	mm					mm	mm	mm	bar	Static	10	20	30	40
in	in	in	in	in	in	psi	Static	6	12	19	25	31	40			
460/85 R38/3	W15L W16L W14L	480 18.9	1747 68.8	796 31.3	5214 205.3	167D 70A8	0.8	4990	3260	2670	2500	2380	2280	2170		
							12	10990	7180	5880	5510	5240	5020	4780		
							2.8	9640	6290	5150	4820	4590	4400	4190		
							41	21230	13850	11340	10620	10110	9690	9230		
							3.6	11160	7280	5970	5580	5310	5090	4850		
							52	24580	16040	13150	12290	11700	11210	10680		
							4.4	12540	8180	6700	6270	5970	5720	5450		
							64	27620	18020	14760	13810	13150	12600	12000		

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
520/85 R38	DW16 DW18L	530 20.9	1855 73.0	847 33.3	5513 217.0	155D 58A8	0.8	5930	3870	3170	2970	2830	2710	2580
							12	13060	8520	6980	6540	6230	5970	5680
							1.0	6760	4410	3620	3380	3220	3090	2940
							15	14890	9710	7970	7440	7090	6810	6480
							1.4	8230	5370	4400	4120	3920	3760	3580
							20	18130	11830	9690	9070	8630	8280	7890
							1.6	8910	5810	4770	4460	4240	4070	3875
							23	19630	12800	10510	9820	9340	8960	8540

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)												
		Speed,km/h(mph)																		
		Tractor Application																		
		SW	OD					mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		mm	mm											Static	6	12	19	25	31	40
in	in	in	in	in	in	in	psi	Static	6	12	19	25	31	40						
520/85 R38	DW16 DW18L	530 20.9	1855 73.0	847 33.3	5513 217.0	169D 72A8	0.8	5930	3870	3170	2970	2830	2710	2580						
							12	13060	8520	6980	6540	6230	5970	5680						
							1.8	8880	5790	4750	4440	4230	4050	3860						
							26	19560	12750	10460	9780	9320	8920	8500						
							2.6	11020	7190	5890	5510	5250	5030	4790						
							38	24270	15840	12970	12140	11560	11080	10550						
							3.6	13340	8700	7130	6670	6350	6090	5800						
							52	29380	19160	15700	14690	13990	13410	12780						

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		Speed,km/h(mph)												
		SW	OD	Tractor Application										
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
520/85 R42	DW16L DW15L DW18L	530 20.9	1951 76.8	888 35.0	5823 229.3	157D 60A8	0.8	6330	4130	3380	3160	3010	2890	2750
							12	13940	9100	7440	6960	6630	6370	6060
							1.0	7200	4700	3850	3600	3430	3290	3130
							15	15860	10350	8480	7930	7560	7250	6890
							1.3	8400	5480	4490	4200	4000	3830	3650
							19	18500	12070	9890	9250	8810	8440	8040
							1.6	9490	6190	5070	4740	4520	4330	4125
							23	20900	13630	11170	10440	9960	9540	9090

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
520/85 R42	DW16L DW15L DW18L	530 20.9	1951 76.8	889 35.0	5823 229.3	169D 72A8	0.8	6330	4130	3380	3160	3010	2890	2750
							12	13940	9100	7440	6960	6630	6370	6060
							1.0	6510	4250	3480	3250	3100	2970	2830
							15	14340	9360	7670	7160	6830	6540	6230
							2.0	9780	6380	5230	4890	4650	4460	4250
							29	21540	14050	11520	10770	10240	9820	9360
							2.8	11910	7770	6370	5960	5670	5440	5180
							41	26230	17110	14030	13130	12490	11980	11410
							3.4	13340	8700	7130	6670	6350	6090	5800
							49	29380	19160	15700	14690	13990	13410	12780

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
520/85 R46	DW16L DW18L	530 20.9	2052 80.8	938 36.9	6124 241.1	174D 77A8	0.8	6510	4250	3480	3250	3100	2970	2830
							12	14340	9360	7670	7160	6830	6540	6230
							2.2	10860	7080	5810	5430	5170	4960	4720
							32	23920	15590	12800	11960	11390	10930	10400
							3.2	13520	8820	7230	6760	6440	6170	5880
							46	29780	19430	15930	14890	14190	13590	12950
							4.0	15410	10050	8240	7710	7340	7040	6700
							58	33940	22140	18150	16980	16170	15510	14760

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Tractor Application						
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
520/85 R46	DW16L DW18L	530 20.9	2052 80.8	938 36.9	6124 241.1	158D 61A8	0.8	6510	4250	3480	3250	3100	2970	2830
							12	14340	9360	7670	7160	6830	6540	6230
							1.0	7430	4850	3970	3710	3540	3390	3230
							15	16370	10680	8740	8170	7800	7470	7110
							1.3	8650	5640	4620	4320	4120	3950	3760
							19	19050	12420	10180	9520	9070	8700	8280
							1.6	9780	6380	5230	4890	4650	4460	4250
							23	21540	14050	11520	10770	10240	9820	9360



FARMAX R90

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
								Tractor Application						
		SW	OD					Static	10	20	30	40	50	65
		mm	mm	mm	mm	mm	bar	Static	6	12	19	25	31	40
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
420/90 R30	DW13 W14L	426 16.8	1518 59.8	676 26.6	4459 175.6	142D 45A8	0.8	3910	2550	2090	1960	1860	1790	1700
							12	8610	5620	4600	4320	4100	3940	3740
							1.2	5010	3270	2680	2510	2390	2290	2180
							17	11040	7200	5900	5530	5260	5040	4800
							1.4	5590	3650	2990	2790	2660	2550	2430
							20	12310	8040	6590	6150	5860	5620	5350
							1.6	6100	3980	3260	3050	2900	2780	2650
							23	13440	8770	7180	6720	6390	6120	5840

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
								Tractor Application						
		SW	OD					Static	10	20	30	40	50	65
		mm	mm	mm	mm	mm	bar	Static	6	12	19	25	31	40
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
420/90 R30	DW13 W14L	426 16.8	1518 59.8	676 26.6	4459 175.6	147D 50A8	0.8	3910	2550	2090	1960	1860	1790	1700
							12	8610	5620	4600	4320	4100	3940	3740
							1.3	5290	3450	2830	2650	2520	2420	2300
							19	11650	7600	6230	5840	5550	5330	5070
							2.2	6900	4500	3690	3450	3290	3150	3000
							32	15200	9910	8130	7600	7250	6940	6610
							2.4	7070	4610	3780	3540	3370	3230	3075
							35	15570	10150	8330	7800	7420	7110	6770

FEATURES AND BENEFITS

Extra-deep tread,
with curved tread bars

Better self cleaning &
traction in wet soil



Flatter tread

Reduces soil
compaction



Dual step tie bar

Prevents mud
clogging while adding
traction & side hill
slip resistance



Stepped lug design

Good grip in wet
& moist soil



Bolstered nose
at tread center

Improved wear &
performance



Buttressed
bar base

Better
self cleaning

FARMAX R85/90 R2

TRA CODE : R-2



FARMAX

R85/90 R2

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)										
		Speed,km/h(mph)																
		Tractor Application																
		SW	OD					mm	mm	mm	mm	bar	Static	10	20	30	40	50
		mm	mm															
in	in	in	in	in	in	psi	Static	6	12	19	25	31						
420/90 R30	DW13 W14L	426 16.8	1518 59.8	676 26.6	4459 175.6	147D 50A8	0.8	3730	2430	1990	1730	1620	1620					
							12	8220	5350	4380	3810	3570	3570					
							1.3	4720	3080	2520	2190	2050	2050					
							19	10400	6780	5550	4820	4520	4520					
							2.2	6720	4380	3590	3120	2920	2920					
							32	14800	9650	7910	6870	6430	6430					
							2.4	7070	4610	3780	3290	3075	3075					
							35	15570	10150	8330	7250	6770	6770					

MULTIPURPOSE TRACTOR



FEATURES AND BENEFITS

Gives better
stability on road
Big centre block



Better driving
comfort &
self cleaning
Unique angular
grooves



Good traction
on-road & off-road
Robust block
design



Uniform load
distribution and
good puncture &
impact resistance

Steel belted
carcass



MULTILOADMAX

TRA CODE : M+S



MULTILOADMAX

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)													
								Speed,km/h(mph)													
		SW	OD					Constant Load							Cyclic Operation						
		mm	mm					mm	mm	mm	bar	20	30	40	50	65	Static	10	bar	10	15
		in	in					in	in	in	psi	12	19	25	31	40	Static	6	psi	6	9
500/70 R24	DW16L DW15L DW18L	503 19.8	1310 51.6	617 24.3	3921 154.4	164 A8/B	0.8	2020	1920	1840	1730	1600	4220	2300	0.8	2770	2460				
							12	4450	4230	4050	3810	3520	9300	5070	12	6100	5420				
							1.6	3150	3000	2880	2700	2500	6600	3600	1.6	4330	3850				
							23	6940	6610	6340	5950	5510	14540	7930	23	9540	8480				
							2.4	3650	3480	3340	3130	2900	7660	4180	2.4	5020	4470				
							35	8040	7670	7360	6890	6390	16870	9210	35	11060	9850				
							3.2	4470	4260	4080	3830	3550	9370	5110	3.2	6140	5470				
							46	9850	9380	8990	8440	7820	20640	11260	46	13520	12050				
							4.0	5510	5250	5030	4730	4375	11550	6300	4	7570	6740				
							58	12140	11560	11080	10420	9640	25440	13880	58	16670	14850				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)													
								Speed,km/h(mph)													
		SW	OD					Constant Load							Cyclic Operation						
		mm	mm					mm	mm	mm	bar	20	30	40	50	65	Static	10	bar	10	15
		in	in					in	in	in	psi	12	19	25	31	40	Static	6	psi	6	9
500/70 R24	DW16L DW15L DW18L	503 19.8	1310 51.6	617 24.3	3921 154.4	164 A8/B	0.8	2020	1920	1840	1730	1600	4220	2300	0.8	2770	2460				
							12	4450	4230	4050	3810	3520	9300	5070	12	6100	5420				
							1.6	3150	3000	2880	2700	2500	6600	3600	1.6	4330	3850				
							23	6940	6610	6340	5950	5510	14540	7930	23	9540	8480				
							2.4	3650	3480	3340	3130	2900	7660	4180	2.4	5020	4470				
							35	8040	7670	7360	6890	6390	16870	9210	35	11060	9850				
							3.2	4470	4260	4080	3830	3550	9370	5110	3.2	6140	5470				
							46	9850	9380	8990	8440	7820	20640	11260	46	13520	12050				
							4.0	5510	5250	5030	4730	4375	11550	6300	4.0	7570	6740				
							58	12140	11560	11080	10420	9640	25440	13880	58	16670	14850				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)													
								Speed,km/h(mph)													
		SW	OD					Constant Load							Cyclic Operation						
		mm	mm					mm	mm	mm	bar	20	30	40	50	65	Static	10	bar	10	15
		in	in					in	in	in	psi	12	19	25	31	40	Static	6	psi	6	9
500/70 R24	DW16L DW15L DW18L	503 19.8	1310 51.6	617 24.3	3921 154.4	164 A8/B	0.8	2020	1920	1840	1730	1600	4220	2300	0.8	2770	2460				
							12	4450	4230	4050	3810	3520	9300	5070	12	6100	5420				
							1.6	3150	3000	2880	2700	2500	6600	3600	1.6	4330	3850				
							23	6940	6610	6340	5950	5510	14540	7930	23	9540	8480				
							2.4	3650	3480	3340	3130	2900	7660	4180	2.4	5020	4470				
							35	8040	7670	7360	6890	6390	16870	9210	35	11060	9850				
							3.2	4470	4260	4080	3830	3550	9370	5110	3.2	6140	5470				
							46	9850	9380	8990	8440	7820	20640	11260	46	13520	12050				
							4.0	5510	5250	5030	4730	4375	11550	6300	4.0	7570	6740				
							58	12140	11560	11080	10420	9640	25440	13880	58	16670	14850				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Constant Load							Cyclic Operation		
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65	bar	10	15
		in	in	in	in	in	psi	Static	6	12	19	25	31	40	psi	6	9
540/70 R24	W18L W16L	1466 57.7	1366 53.8	612 24.1	4120 162.2	170D 75A8	0.8	4750	2590	2270	2160	2070	1940	1800	0.8	3110	2770
							12	10460	5700	5000	4760	4560	4270	3960	12	6850	6100
							1.6	7390	4030	3530	3360	3220	3020	2800	1.6	4840	4310
							23	16280	8880	7780	7400	7090	6650	6170	23	10660	9490
							2.4	8840	4820	4220	4020	3850	3620	3350	2.4	5800	5160
							35	19470	10620	9300	8850	8480	7970	7380	35	12780	11370
							5.0	15840	8640	7560	7200	6900	6480	6000	5.0	10380	9240
							73	34890	19030	16650	15860	15200	14270	13220	73	22860	20350

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Constant Load							Cyclic Operation		
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65	bar	10	15
		in	in	in	in	in	psi	Static	6	12	19	25	31	40	psi	6	9
540/80 R38	DW18L W16L	550 21.7	1829 72.0	833 32.8	5516 217.2	167D 72A8	0.8	6600	3600	3150	3000	2880	2700	2500	0.8	4330	3850
							12	14540	7930	6940	6610	6340	5950	5510	12	9540	8480
							1.6	10230	5580	4880	4650	4460	4190	3875	1.6	6700	5970
							23	22530	12290	10750	10240	9820	9230	8540	23	14760	13150
							2.4	12210	6660	5830	5550	5320	5000	4625	2.4	8000	7120
							35	26890	14670	12840	12220	11720	11010	10190	35	17620	15680
							3.2	14390	7850	6870	6540	6270	5890	5450	3.2	9430	8390
							46	31700	17290	15130	14410	13810	12970	12000	46	20770	18480

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Constant Load							Cyclic Operation		
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65	bar	10	15
		in	in	in	in	in	psi	Static	6	12	19	25	31	40	psi	6	9
600/70 R30	DW20 DW18	601 23.7	1580 62.2	709 27.9	4706 185.3	166D 71A8	0.8	6230	3400	2970	2830	2710	2550	2360	0.8	4080	3630
							12	13720	7490	6540	6230	5970	5620	5200	12	8990	8000
							1.2	7920	4320	3780	3600	3450	3240	3000	1.2	5190	4620
							17	17440	9520	8330	7930	7600	7140	6610	17	11430	10180
							1.6	9640	5260	4600	4380	4200	3940	3650	1.6	6310	5620
							23	21230	11590	10130	9650	9250	8680	8040	23	13900	12380
							2.4	11220	6120	5360	5100	4890	4590	4250	2.4	7350	6550
							35	24710	13480	11810	11230	10770	10110	9360	35	16190	14430
							3.2	13990	7630	6680	6360	6100	5720	5300	3.2	9170	8160
							46	30810	16810	14710	14010	13440	12600	11670	46	20200	17970

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Constant Load							Cyclic Operation		
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65	bar	10	15
		in	in	in	in	in	psi	Static	6	12	19	25	31	40	psi	6	9
710/70 R42	DW23B DW25B	715 28.1	2061 81.1	932 36.7	6119 240.9	173D 76A8	0.8	9370	5110	4470	4260	4080	3830	3550	0.8	6140	5470
							12	20640	11260	9850	9380	8990	8440	7820	12	13520	12050
							1.2	11880	6480	5670	5400	5180	4860	4500	1.2	7790	6930
							17	26170	14270	12490	11890	11410	10700	9910	17	17160	15260
							1.6	14780	8060	7060	6720	6440	6050	5600	1.6	9690	8620
							23	32560	17750	15550	14800	14190	13330	12330	23	21340	18990
							2.4	17160	9360	8190	7800	7480	7020	6500	2.4	11250	10010
							35	37800	20620	18040	17180	16480	15460	14320	35	24780	22050
							3.2	21120	11520	10040	9600	9200	8640	8000	3.2	13840	12320
							46	46520	25370	22110	21150	20260	19030	17620	46	30480	27140

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Constant Load							Cyclic Operation		
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65	bar	10	15
		in	in	in	in	in	psi	Static	6	12	19	25	31	40	psi	6	9
710/70 R42	DW23B DW25B	715 28.1	2061 81.1	932 36.7	6119 240.9	173D 76A8	0.8	9370	5110	4470	4260	4080	3830	3550	0.8	6140	5470
							12	20640	11260	9850	9380	8990	8440	7820	12	13520	12050
							1.2	11880	6480	5670	5400	5180	4860	4500	1.2	7790	6930
							17	26170	14270	12490	11890	11410	10700	9910	17	17160	15260
							1.6	14780	8060	7060	6720	6440	6050	5600	1.6	9690	8620
							23	32560	17750	15550	14800	14190	13330	12330	23	21340	18990
							2.4	17160	9360	8190	7800	7480	7020	6500	2.4	11250	10010
							35	37800	20620	18040	17180	16480	15460	14320	35	24780	22050
							3.2	21120	11520	10040	9600	9200	8640	8000	3.2	13840	12320
							46	46520	25370	22110	21150	20260	19030	17620	46	30480	27140

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Constant Load							Cyclic Operation		
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65	bar	10	15
		in	in	in	in	in	psi	Static	6	12	19	25	31	40	psi	6	9
250/80 R16	W8 W7 W9	265 10.4	810 31.9	367 14.4	2473 97.4	123D 27A8	0.8	1360	740	650	620	590	560	515	0.8	890	790
							12	3000	1630	1430	1370	1300	1230	1130	12	1960	1740
							1.2	1720	940	820	780	750	700	650	1.2	1120	1000
							17	3790	2070	1810	1720	1650	1540	1430	17	2470	2200
							1.6	2110	1150	1010	960	920	860	800	1.6	1380	1230
							23	4650	2530	2220	2110	2030	1890	1760	23	3040	2710
							3.2	3040	1660	1450	1380	1320	1240	1150	3.2	1990	1770
							46	6700	3660	3190	3040	2910	2730	2530	46	4380	3900
							4.5	4090	2230	1950	1860	1780	1670	1550	4.5	2680	2390
							65	9010	4910	4300	4100	3920	3680	3410	65	5900	5260

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)								
								Speed,km/h(mph)								
		SW	OD					Constant Load						Cyclic Operation		
		mm	mm	mm	mm	mm	bar	Static	10	20	25	30	40	bar	10	15
		in	in	in	in	in	psi	Static	6	12	16	19	25	psi	6	9
265/70 R16.5	8.25	266 10.5	773 30.4	353 13.9	2331 91.8	130A 223A8	0.8	1150	630	550	530	520	500	0.8	750	670
							12	2530	1390	1210	1170	1150	1100	12	1650	1480
							1.2	1500	810	710	690	680	650	1.2	980	870
							17	3300	1780	1560	1520	1500	1430	17	2160	1920
							1.6	1840	1000	870	850	830	800	1.6	1200	1070
							23	4050	2200	1920	1870	1830	1760	23	2640	2360
							3.2	2960	1610	1400	1360	1340	1285	3.2	1930	1720
							46	6520	3550	3080	3000	2950	2830	46	4250	3790
							4.0	3570	1900	1690	1640	1610	1550	4.0	2330	2080
							58	7860	4190	3720	3610	3550	3410	58	5130	4580

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)								
								Speed,km/h(mph)								
		SW	OD					Constant Load						Cyclic Operation		
		mm	mm	mm	mm	mm	bar	Static	10	20	25	30	40	bar	10	15
		in	in	in	in	in	psi	Static	6	12	16	19	25	psi	6	9
305/70 R16.5	9.75	307 12.1	831 32.7	376 14.8	2506 98.7	146A 238A8	0.8	1780	970	840	820	810	775	0.8	1160	1040
							12	3920	2140	1850	1810	1780	1710	12	2560	2290
							1.2	2240	1220	1060	1030	1010	975	1.2	1460	1310
							17	4930	2690	2330	2270	2220	2150	17	3220	2890
							1.6	2710	1480	1290	1250	1230	1180	1.6	1770	1580
							23	5970	3260	2840	2750	2710	2600	23	3900	3480
							3.2	4490	2440	2130	2070	2030	1950	3.2	2930	2610
							46	9890	5370	4690	4560	4470	4300	46	6450	5750
							4.0	5430	3000	2570	2500	2450	2360	4.0	3540	3160
							58	11960	6610	5660	5510	5400	5200	58	7800	6960

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Constant Load							Cyclic Operation		
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65	bar	10	15
		in	in	in	in	in	psi	Static	6	12	19	25	31	40	psi	6	9
340/80 R18	W11 W10 W12	343 13.5	1001 39.4	445 17.5	2987 117.6	143 A8/B	0.8	2310	1260	1100	1050	1010	950	875	0.8	1510	1350
							12	5090	2780	2420	2310	2220	2090	1930	12	3330	2970
							1.6	3590	1960	1710	1630	1560	1470	1360	1.6	2350	2090
							23	7910	4320	3770	3590	3440	3240	3000	23	5180	4600
							2.4	4750	2590	2270	2160	2070	1940	1800	2.4	3110	2770
							35	10460	5700	5000	4760	4560	4270	3960	35	6850	6100
							3.2	5150	2810	2460	2340	2240	2110	1950	3.2	3370	3000
							46	11340	6190	5420	5150	4930	4650	4300	46	7420	6610
							4.0	6230	3400	2970	2830	2710	2550	2360	4.0	4080	3630
58	13720	7490	6540	6230	5970	5620	5200	58	8990	8000							

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Constant Load							Cyclic Operation		
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65	bar	10	15
		in	in	in	in	in	psi	Static	6	12	19	25	31	40	psi	6	9
340/80 R18	W11 W10 W12	343 13.5	1001 39.4	445 17.5	2987 117.6	143 A8/B	0.8	2310	1260	1100	1050	1010	950	875	0.8	1510	1350
							12	5090	2780	2420	2310	2220	2090	1930	12	3330	2970
							1.6	3590	1960	1710	1630	1560	1470	1360	1.6	2350	2090
							23	7910	4320	3770	3590	3440	3240	3000	23	5180	4600
							2.4	4750	2590	2270	2160	2070	1940	1800	2.4	3110	2770
							35	10460	5700	5000	4760	4560	4270	3960	35	6850	6100
							3.2	5150	2810	2460	2340	2240	2110	1950	3.2	3370	3000
							46	11340	6190	5420	5150	4930	4650	4300	46	7420	6610
							4.0	6230	3400	2970	2830	2710	2550	2360	4.0	4080	3630
							58	13720	7490	6540	6230	5970	5620	5200	58	8990	8000

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Constant Load							Cyclic Operation		
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65	bar	10	15
		in	in	in	in	in	psi	Static	6	12	19	25	31	40	psi	6	9
340/80 R18	W11 W10 W12	343 13.5	1001 39.4	445 17.5	2987 117.6	143 A8/B	0.8	2310	1260	1100	1050	1010	950	875	0.8	1510	1350
							12	5090	2780	2420	2310	2220	2090	1930	12	3330	2970
							1.6	3590	1960	1710	1630	1560	1470	1360	1.6	2350	2090
							23	7910	4320	3770	3590	3440	3240	3000	23	5180	4600
							2.4	4750	2590	2270	2160	2070	1940	1800	2.4	3110	2770
							35	10460	5700	5000	4760	4560	4270	3960	35	6850	6100
							3.2	5150	2810	2460	2340	2240	2110	1950	3.2	3370	3000
							46	11340	6190	5420	5150	4930	4650	4300	46	7420	6610
							4.0	6230	3400	2970	2830	2710	2550	2360	4.0	4080	3630
							58	13720	7490	6540	6230	5970	5620	5200	58	8990	8000

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Constant Load							Cyclic Operation		
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65	bar	10	15
		in	in	in	in	in	psi	Static	6	12	19	25	31	40	psi	6	9
360/70 R20	W11 W10 W12	353 13.9	1030 40.6	466 18.3	3106 122.3	131D 36A8	0.8	2310	1260	1100	1050	1010	950	875	0.8	1510	1350
							12	5090	2780	2420	2310	2220	2090	1930	12	3330	2970
							1.2	3040	1660	1450	1380	1320	1240	1150	1.2	1990	1770
							17	6700	3660	3190	3040	2910	2730	2530	17	4380	3900
							1.6	3700	2020	1760	1680	1610	1510	1400	1.6	2420	2160
							23	8150	4450	3880	3700	3550	3330	3080	23	5330	4760
							2.4	4880	2660	2330	2220	2130	2000	1850	2.4	3200	2850
							35	10750	5860	5130	4890	4690	4410	4070	35	7050	6280
							3.2	5150	2810	2460	2340	2240	2110	1950	3.2	3370	3000
							46	11340	6190	5420	5150	4930	4650	4300	46	7420	6610

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Constant Load							Cyclic Operation		
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65	bar	10	15
		in	in	in	in	in	psi	Static	6	12	19	25	31	40	psi	6	9
360/70 R20	W11 W10 W12	353 13.9	1030 40.6	466 18.3	3106 122.3	131D 36A8	0.8	2310	1260	1100	1050	1010	950	875	0.8	1510	1350
							12	5090	2780	2420	2310	2220	2090	1930	12	3330	2970
							1.2	3040	1660	1450	1380	1320	1240	1150	1.2	1990	1770
							17	6700	3660	3190	3040	2910	2730	2530	17	4380	3900
							1.6	3700	2020	1760	1680	1610	1510	1400	1.6	2420	2160
							23	8150	4450	3880	3700	3550	3330	3080	23	5330	4760
							2.4	4880	2660	2330	2220	2130	2000	1850	2.4	3200	2850
							35	10750	5860	5130	4890	4690	4410	4070	35	7050	6280
							3.2	5150	2810	2460	2340	2240	2110	1950	3.2	3370	3000
							46	11340	6190	5420	5150	4930	4650	4300	46	7420	6610

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Constant Load							Cyclic Operation		
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65	bar	10	15
		in	in	in	in	in	psi	Static	6	12	19	25	31	40	psi	6	9
360/80 R20	W11 W10 W12	357 14.1	1088 42.8	489 19.3	3281 129.2	143D 47A8	0.8	2640	1440	1260	1200	1150	1080	1000	0.8	1730	1540
							12	5810	3170	2780	2640	2530	2380	2200	12	3810	3390
							1.2	3390	1850	1620	1540	1480	1390	1285	1.2	2220	1980
							17	7470	4070	3570	3390	3260	3060	2830	17	4890	4360
							1.6	4090	2230	1950	1860	1780	1670	1550	1.6	2680	2390
							23	9010	4910	4300	4100	3920	3680	3410	23	5900	5260
							3.2	5910	3230	2820	2690	2580	2420	2240	3.2	3880	3450
							46	13020	7110	6210	5930	5680	5330	4930	46	8550	7600
							4.0	7190	3920	3430	3270	3130	2940	2725	4.0	4710	4200
							58	15840	8630	7560	7200	6890	6480	6000	58	10370	9250

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Constant Load							Cyclic Operation		
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65	bar	10	15
		in	in	in	in	in	psi	Static	6	12	19	25	31	40	psi	6	9
360/80 R24	W11 W10 W12 W13	357 14.1	1189 46.8	540 21.3	3552 139.8	145D 50A8	0.8	2880	1570	1370	1310	1250	1180	1090	0.8	1890	1680
							12	6340	3460	3020	2890	2750	2600	2400	12	4160	3700
							1.2	3700	2020	1760	1680	1610	1510	1400	1.2	2420	2160
							17	8150	4450	3880	3700	3550	3330	3080	17	5330	4760
							1.6	4490	2450	2140	2040	1960	1840	1700	1.6	2940	2620
							23	9890	5400	4710	4490	4320	4050	3740	23	6480	5770
							3.2	6420	3500	3060	2920	2790	2620	2430	3.2	4200	3740
							46	14140	7710	6740	6430	6150	5770	5350	46	9250	8240
							4.0	7660	4180	3650	3480	3340	3130	2900	4.0	5020	4470
							58	16870	9210	8040	7670	7360	6890	6390	58	11060	9850

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Constant Load							Cyclic Operation		
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65	bar	10	15
		in	in	in	in	in	psi	Static	6	12	19	25	31	40	psi	6	9
360/80 R28	W11 W10 W12 W13	357 14.1	1300 51.2	595 23.4	3921 154.4	142D 46A8	0.8	3040	1660	1450	1380	1320	1240	1150	0.8	1990	1770
							12	6700	3660	3190	3040	2910	2730	2530	12	4380	3900
							1.2	3960	2160	1890	1800	1730	1620	1500	1.2	2600	2310
							17	8720	4760	4160	3960	3810	3570	3300	17	5730	5090
							1.6	4750	2590	2270	2160	2070	1940	1800	1.6	3110	2770
							23	10460	5700	5000	4760	4560	4270	3960	23	6850	6100
							2.4	5600	3050	2670	2540	2440	2290	2120	2.4	3670	3260
							35	12330	6720	5880	5590	5370	5040	4670	35	8080	7180
							3.2	7000	3820	3340	3180	3050	2860	2650	3.2	4580	4080
							46	15420	8410	7360	7000	6720	6300	5840	46	10090	8990

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Constant Load							Cyclic Operation		
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65	bar	10	15
		in	in	in	in	in	psi	Static	6	12	19	25	31	40	psi	6	9
400/70 R18	13 12	404 15.9	1017 40.0	456 18.0	3067 120.7	143D 47A8	0.8	2640	1440	1260	1200	1150	1080	1000	0.8	1730	1540
							12	5810	3170	2780	2640	2530	2380	2200	12	3810	3390
							1.2	3390	1850	1620	1540	1480	1390	1285	1.2	2220	1980
							17	7470	4070	3570	3390	3260	3060	2830	17	4890	4360
							1.6	4090	2230	1950	1860	1780	1670	1550	1.6	2680	2390
							23	9010	4910	4300	4100	3920	3680	3410	23	5900	5260
							3.2	5910	3230	2820	2690	2580	2420	2240	3.2	3880	3450
							46	13020	7110	6210	5930	5680	5330	4930	46	8550	7600
							4.0	7190	3920	3430	3270	3130	2940	2725	4.0	4710	4200
							58	15840	8630	7560	7200	6890	6480	6000	58	10370	9250

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Constant Load							Cyclic Operation		
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65	bar	10	15
		in	in	in	in	in	psi	Static	6	12	19	25	31	40	psi	6	9
400/70 R20	W13L W12L W14	404 15.9	1067 42.0	475 18.7	3201 126.0	149 A8/B	0.8	2720	1480	1300	1240	1180	1110	1030	0.8	1780	1590
							12	5990	3260	2860	2730	2600	2440	2270	12	3920	3500
							1.2	3480	1900	1660	1580	1520	1430	1320	1.2	2280	2030
							17	7670	4190	3660	3480	3350	3150	2910	17	5020	4470
							1.6	4360	2380	2080	1980	1900	1780	1650	1.6	2850	2540
							23	9600	5240	4580	4360	4190	3920	3630	23	6280	5590
							3.2	6070	3310	2900	2760	2650	2480	2300	3.2	3980	3540
							46	13370	7290	6390	6080	5840	5460	5070	46	8770	7800
							4.0	7390	4030	3530	3360	3220	3020	2800	4.0	4840	4310
							58	16280	8880	7780	7400	7090	6650	6170	58	10660	9490

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Constant Load							Cyclic Operation		
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65	bar	10	15
		in	in	in	in	in	psi	Static	6	12	19	25	31	40	psi	6	9
400/70 R20	W13L W12L W14	404 15.9	1067 42.0	475 18.7	3201 126.0	149 A8/B	0.8	2720	1480	1300	1240	1180	1110	1030	0.8	1780	1590
							12	5990	3260	2860	2730	2600	2440	2270	12	3920	3500
							1.2	3480	1900	1660	1580	1520	1430	1320	1.2	2280	2030
							17	7670	4190	3660	3480	3350	3150	2910	17	5020	4470
							1.6	4360	2380	2080	1980	1900	1780	1650	1.6	2850	2540
							23	9600	5240	4580	4360	4190	3920	3630	23	6280	5590
							3.2	6070	3310	2900	2760	2650	2480	2300	3.2	3980	3540
							46	13370	7290	6390	6080	5840	5460	5070	46	8770	7800
							4.0	7390	4030	3530	3360	3220	3020	2800	4.0	4840	4310
							58	16280	8880	7780	7400	7090	6650	6170	58	10660	9490

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Constant Load							Cyclic Operation		
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65	bar	10	15
		in	in	in	in	in	psi	Static	6	12	19	25	31	40	psi	6	9
400/80 R24	DW13 DW12 DW14	404 15.9	1250 49.2	565 22.2	3770 148.4	151D 56A8	0.8	3390	1850	1620	1540	1480	1390	1285	0.8	2220	1980
							12	7470	4070	3570	3390	3260	3060	2830	12	4890	4360
							1.6	5280	2880	2520	2400	2300	2160	2000	1.6	3460	3080
							23	11630	6340	5550	5290	5070	4760	4410	23	7620	6780
							2.4	6230	3400	2970	2830	2710	2550	2360	2.4	4080	3630
							35	13720	7490	6540	6230	5970	5620	5200	35	8990	8000
							3.2	7390	4030	3530	3360	3220	3020	2800	3.2	4840	4310
							46	16280	8880	7780	7400	7090	6650	6170	46	10660	9490
							4.0	9110	4970	4350	4140	3970	3730	3450	4.0	5970	5310
							58	20070	10950	9580	9120	8740	8220	7600	58	13150	11700

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Constant Load							Cyclic Operation		
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65	bar	10	15
		in	in	in	in	in	psi	Static	6	12	19	25	31	40	psi	6	9
400/80 R28	DW13 DW12 DW14L	404 15.9	1351 53.2	615 24.2	4075 160.4	153D 58A8	0.8	3590	1960	1710	1630	1560	1470	1360	0.8	2350	2090
							12	7910	4320	3770	3590	3440	3240	3000	12	5180	4600
							1.6	5600	3050	2670	2540	2440	2290	2120	1.6	3670	3260
							23	12330	6720	5880	5590	5370	5040	4670	23	8080	7180
							2.4	6600	3600	3150	3000	2880	2700	2500	2.4	4330	3850
							35	14540	7930	6940	6610	6340	5950	5510	35	9540	8480
							3.2	8120	4430	3870	3690	3540	3320	3075	3.2	5320	4740
							46	17890	9760	8520	8130	7800	7310	6770	46	11720	10440
							4.0	9640	5260	4600	4380	4200	3940	3650	4.0	6310	5620
							58	21230	11590	10130	9650	9250	8680	8040	58	13900	12380

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Constant Load							Cyclic Operation		
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65	bar	10	15
		in	in	in	in	in	psi	Static	6	12	19	25	31	40	psi	6	9
440/80 R24	DW14L W15L W16L	441 17.4	1314 51.7	591 23.3	3942 155.2	161 A8/B	0.8	3960	2160	1890	1800	1730	1620	1500	0.8	2600	2310
							12	8720	4760	4160	3960	3810	3570	3300	12	5730	5090
							1.6	6070	3310	2900	2760	2650	2480	2300	1.6	3980	3540
							23	13370	7290	6390	6080	5840	5460	5070	23	8770	7800
							2.4	7190	3920	3430	3270	3130	2940	2725	2.4	4710	4200
							35	15840	8630	7560	7200	6890	6480	6000	35	10370	9250
							3.2	8580	4680	4100	3900	3740	3510	3250	3.2	5620	5010
							46	18900	10310	9030	8590	8240	7730	7160	46	12380	11040
							4.0	10560	5760	5040	4800	4600	4320	4000	4.0	6920	6160
							58	23260	12690	11100	10570	10130	9520	8810	58	15240	13570

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Constant Load							Cyclic Operation		
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65	bar	10	15
		in	in	in	in	in	psi	Static	6	12	19	25	31	40	psi	6	9
440/80 R24	DW14L W15L W16L	441 17.4	1314 51.7	591 23.3	3942 155.2	161 A8/B	0.8	3960	2160	1890	1800	1730	1620	1500	0.8	2600	2310
							12	8720	4760	4160	3960	3810	3570	3300	12	5730	5090
							1.6	6070	3310	2900	2760	2650	2480	2300	1.6	3980	3540
							23	13370	7290	6390	6080	5840	5460	5070	23	8770	7800
							2.4	7190	3920	3430	3270	3130	2940	2725	2.4	4710	4200
							35	15840	8630	7560	7200	6890	6480	6000	35	10370	9250
							3.2	8580	4680	4100	3900	3740	3510	3250	3.2	5620	5010
							46	18900	10310	9030	8590	8240	7730	7160	46	12380	11040
							4.0	10560	5760	5040	4800	4600	4320	4000	4.0	6920	6160
							58	23260	12690	11100	10570	10130	9520	8810	58	15240	13570

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Constant Load							Cyclic Operation		
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65	bar	10	15
		in	in	in	in	in	psi	Static	6	12	19	25	31	40	psi	6	9
440/80 R28	DW14L W15L W16L	441 17.4	1415 55.7	637 25.1	4245 167.1	156 A8/B	0.8	4220	2300	2020	1920	1840	1730	1600	0.8	2770	2460
							12	9300	5070	4450	4230	4050	3810	3520	12	6100	5420
							1.2	5200	2880	2520	2400	2300	2160	2000	1.2	3460	3020
							17	11450	6340	5550	5290	5070	4760	4410	17	7620	6650
							1.6	6600	3600	3150	3000	2880	2700	2500	1.6	4330	3850
							23	14540	7930	6940	6610	6340	5950	5510	23	9540	8480
							3.2	9370	5110	4470	4260	4080	3830	3550	3.2	6140	5470
							46	20640	11260	9850	9380	8990	8440	7820	46	13520	12050
							4.0	11220	6120	5360	5100	4890	4590	4250	4.0	7350	6550
							58	24710	13480	11810	11230	10770	10110	9360	58	16190	14430

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Constant Load							Cyclic Operation		
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65	bar	10	15
		in	in	in	in	in	psi	Static	6	12	19	25	31	40	psi	6	9
440/80 R28	DW14L W15L W16L	441 17.4	1415 55.7	637 25.1	4245 167.1	156 A8/B	0.8	4220	2300	2020	1920	1840	1730	1600	0.8	2770	2460
							12	9300	5070	4450	4230	4050	3810	3520	12	6100	5420
							1.2	5200	2880	2520	2400	2300	2160	2000	1.2	3460	3020
							17	11450	6340	5550	5290	5070	4760	4410	17	7620	6650
							1.6	6600	3600	3150	3000	2880	2700	2500	1.6	4330	3850
							23	14540	7930	6940	6610	6340	5950	5510	23	9540	8480
							3.2	9370	5110	4470	4260	4080	3830	3550	3.2	6140	5470
							46	20640	11260	9850	9380	8990	8440	7820	46	13520	12050
							4.0	11220	6120	5360	5100	4890	4590	4250	4.0	7350	6550
							58	24710	13480	11810	11230	10770	10110	9360	58	16190	14430

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Constant Load							Cyclic Operation		
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65	bar	10	15
		in	in	in	in	in	psi	Static	6	12	19	25	31	40	psi	6	9
440/80 R30	DW14L DW15L	442 17.4	1466 57.7	667 26.3	4421 174.1	153D 57A8	0.8	4360	2380	2080	1980	1900	1780	1650	0.8	2850	2540
							12	9600	5240	4580	4360	4190	3920	3630	12	6280	5590
							1.6	6800	3710	3240	3090	2960	2780	2575	1.6	4450	3970
							23	14980	8170	7140	6810	6520	6120	5670	23	9800	8740
							2.4	7920	4320	3780	3600	3450	3240	3000	2.4	5190	4620
							35	17440	9520	8330	7930	7600	7140	6610	35	11430	10180
							3.2	9640	5260	4600	4380	4200	3940	3650	3.2	6310	5620
							46	21230	11590	10130	9650	9250	8680	8040	46	13900	12380

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Constant Load							Cyclic Operation		
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65	bar	10	15
		in	in	in	in	in	psi	Static	6	12	19	25	31	40	psi	6	9
440/80 R34	DW14L W15L DW16L	441 17.4	1568 61.7	717 28.2	4729 186.2	155D 59A8	0.8	4620	2520	2210	2100	2010	1890	1750	0.8	3030	2700
							12	10180	5550	4870	4630	4430	4160	3850	12	6670	5950
							1.6	7190	3920	3430	3270	3130	2940	2725	1.6	4710	4200
							23	15840	8630	7560	7200	6890	6480	6000	23	10370	9250
							2.4	8320	4540	3970	3780	3620	3400	3150	2.4	5450	4850
							35	18330	10000	8740	8330	7970	7490	6940	35	12000	10680
							3.2	10230	5580	4880	4650	4460	4190	3875	3.2	6700	5970
							46	22530	12290	10750	10240	9820	9230	8540	46	14760	13150

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Constant Load							Cyclic Operation		
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65	bar	10	15
		in	in	in	in	in	psi	Static	6	12	19	25	31	40	psi	6	9
480/80 R34	DW15 DW16L DW18L	479 18.9	1632 64.3	743 29.3	4922 193.8	159D 64A8	0.8	5150	2810	2460	2340	2240	2110	1950	0.8	3370	3000
							12	11340	6190	5420	5150	4930	4650	4300	12	7420	6610
							1.6	8120	4430	3870	3690	3540	3320	3075	1.6	5320	4740
							23	17890	9760	8520	8130	7800	7310	6770	23	11720	10440
							2.4	9640	5260	4600	4380	4200	3940	3650	2.4	6310	5620
							35	21230	11590	10130	9650	9250	8680	8040	35	13900	12380
							3.2	11550	6300	5510	5250	5030	4730	4375	3.2	7570	6740
							46	25440	13880	12140	11560	11080	10420	9640	46	16670	14850

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Constant Load							Cyclic Operation		
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	65	bar	10	15
		in	in	in	in	in	psi	Static	6	12	19	25	31	40	psi	6	9
480/80 R38	DW15L DW16L DW18L	479 18.9	1733 68.2	794 31.3	5227 205.8	161D 66A8	0.8	5440	2970	2600	2470	2370	2220	2060	0.8	3560	3170
							12	11980	6540	5730	5440	5220	4890	4540	12	7840	6980
							1.6	8580	4680	4100	3730	3740	3510	3250	1.6	5620	5010
							23	18900	10310	9030	8220	8240	7730	7160	23	12380	11040
							2.4	10230	5580	4880	4680	4460	4190	3875	2.4	6700	5970
							35	22530	12290	10750	10310	9820	9230	8540	35	14760	13150
							3.2	12210	6660	5830	5880	5320	5000	4625	3.2	8000	7120
							46	26890	14670	12840	12950	11720	11010	10190	46	17620	15680

HARVESTER



FEATURES AND BENEFITS

R1-W pattern
Longer tyre life



Dual lug angle
Higher traction and
better stability



Higher lug overlap
Enhanced roadability
and loadability



Strong and
sharp shoulders
Better grip



Wide open
shoulders
Better
self-cleaning



Rounded lug base
Stubble resistance



YIELDMAX

TRA CODE : R-1W



YIELDMAX

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)												
								Speed,km/h(mph)												
		SW	OD					Harvester application										CHO		
		mm	mm					mm	mm	mm	bar	10	20	30	40	50	Static	bar	10	15
		in	in					in	in	in	psi	6	12	19	25	31	Static	psi	6	9
750/65 R26 CHO	DW25B DW24B DW23B	754 29.7	1625 64	738 29	4824 189.9	173 A8/B	1.6	6560	5380	4680	4375	4375	10060	0.8	5220	4790				
							23	14450	11850	10310	9640	9640	22160	12	11500	10550				
							2	7310	6000	5220	4875	4875	11210	1.6	7880	7220				
							29	16100	13220	11500	10740	10740	24690	23	17360	15900				
							2.6	8180	6700	5830	5450	5450	12540	2	8780	8040				
							38	18020	14760	12840	12000	12000	27620	29	19340	17710				
							3.6	9750	8000	6960	6500	6500	14950	2.6	9810	8990				
							52	21480	17620	15330	14320	14320	32930	38	21610	19800				
							0.8	3570	3100	2900	2900	6670	4350	3.6	11700	10730				
							12	7860	6830	6390	6390	14690	9580	52	25770	23630				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)												
								Speed,km/h(mph)												
		SW	OD					Harvester application										CHO		
		mm	mm					mm	mm	mm	bar	Static	10	20	30	40	50	bar	10	15
		in	in					in	in	in	psi	Static	6	12	19	25	31	psi	6	9
800/65 R32 CHO	DW27B DW25B	800 31.5	1853 73.0	825 32.5	5540.2 218.1	181 A8/B	0.8	7940	5180	4240	3690	3450	3450	0.8	6210	5690				
							12	17490	11410	9340	8130	7600	7600	12	13680	12530				
							1.6	12190	7950	6520	5670	5300	5300	1.6	9540	8750				
							23	26850	17510	14360	12490	11670	11670	23	21010	19270				
							2.0	13340	8700	7130	6210	5800	5800	2.0	10440	9570				
							29	29380	19160	15700	13680	12780	12780	29	23000	21080				
							2.6	14950	9750	8000	6960	6500	6500	2.6	11700	10730				
							38	32930	21480	17620	15330	14320	14320	38	25770	23630				
							3.8	18980	12380	10150	8830	8250	8250	3.8	14850	13610				
							55	41810	27270	22360	19450	18170	18170	55	32710	29980				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)											
								Speed,km/h(mph)											
		SW	OD					Harvester application					CHO						
		mm	mm					mm	mm	mm	bar	10	20	30	40	50	bar	10	15
		in	in					in	in	in	psi	6	12	19	25	31	psi	6	9
800/70 R32 CHO	DW27B DW25B	798 31.4	1933 76.1	875 34.4	5817.6 229.0	181 A8/B	0.8	5630	4610	4010	3750	3750	0.8	6750	6190				
							12	12400	10150	8830	8260	8260	12	14870	13630				
							1.2	7310	6000	5220	4875	4880	1.2	8780	8040				
							17	16100	13220	11500	10740	10750	17	19340	17710				
							1.6	9000	7380	6420	6000	6000	1.6	10800	9900				
							23	19820	16260	14140	13220	13220	23	23790	21810				
							2.4	10350	8490	7380	6900	6900	2.4	12420	11390				
							35	22800	18700	16260	15200	15200	35	27360	25090				
							3.2	12380	10150	8830	8250	8250	3.2	14850	13610				
							46	27270	22360	19450	18170	18170	46	32710	29980				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)								
								Speed,km/h(mph)								
		SW	OD					Harvester application						CHO		
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	bar	10	15
		in	in	in	in	in	psi	Static	6	12	19	25	31	psi	6	9
900/60 R32 CHO	DW28B DW27B DW30B	896 35.3	1893 74.5	858 33.8	5697.3 224.3	193 A8/B	0.8	8630	5630	4610	4010	3750	3750	0.8	6750	6190
							12	19010	12400	10150	8830	8260	8260	12	14870	13630
							1.6	13340	8700	7130	6210	5800	5800	1.6	10440	9570
							23	29380	19160	15700	13680	12780	12780	23	23000	21080
							2.0	14950	9750	8000	6960	6500	6500	2.0	11700	10730
							29	32930	21480	17620	15330	14320	14320	29	25770	23630
							3.0	18400	12000	9840	8560	8000	8000	3.0	14400	13200
							44	40530	26430	21670	18850	17620	17620	44	31720	29070
							4.0	21280	13880	11380	9900	9250	9250	4.0	16650	15260
							58	46870	30570	25070	21810	20370	20370	58	36670	33610
							4.5	23690	15450	12670	11020	10300	10300	4.5	18540	17000
							65	52180	34030	27910	24270	22690	22690	65	40840	37440
							5.0	26450	17250	14150	12310	11500	11500	5.0	20700	18980
							73	58260	38000	31170	27110	25330	25330	73	45590	41810

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)								
								Speed,km/h(mph)								
		SW	OD					Harvester application						CHO		
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	bar	10	15
		in	in	in	in	in	psi	Static	6	12	19	25	31	psi	6	9
900/60 R42 CHO	DW28B DW27B DW30B	896 35.3	2147 84.5	985 38.8	6461.7 254.4	180 A8/B	0.8	9780	6380	5230	4550	4250	4250	0.8	7650	7010
							12	21540	14050	11520	10020	9360	9360	12	16850	15440
							1.2	12540	8180	6700	5830	5450	5450	1.2	9810	8990
							17	27620	18020	14760	12840	12000	12000	17	21610	19800
							1.4	13800	9000	7380	6420	6000	6000	1.4	10800	9900
							20	30400	19820	16260	14140	13220	13220	20	23790	21810
							1.6	14490	9450	7750	6740	6300	6300	1.6	11340	10400
							23	31920	20810	17070	14850	13880	13880	23	24980	22910
							1.8	15410	10050	8240	7170	6700	6700	1.8	12060	11060
							26	33940	22140	18150	15790	14760	14760	26	26560	24360
							2.0	16790	10950	8980	7810	7300	7300	2.0	13140	12050
							29	36980	24120	19780	17200	16080	16080	29	28940	26540
							2.4	18400	12000	9840	8560	8000	8000	2.4	14400	13200
							35	40530	26430	21670	18850	17620	17620	35	31720	29070

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)								
								Speed,km/h(mph)								
		SW	OD					Harvester application						CHO		
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	bar	10	15
		in	in	in	in	in	psi	Static	6	12	19	25	31	psi	6	9
1050/50 R32 CHO	36.00 VA	1059 41.7	1875 73.8	871 34.3	5643 222.2	184 A8/B	0.8	9200	6000	4920	4280	4000	4000	0.8	7200	6600
							12	20260	13220	10840	9430	8810	8810	12	15860	14540
							1.2	11850	7730	6330	5510	5150	5150	1.2	9270	8500
							17	26100	17030	13940	12140	11340	11340	17	20420	18720
							1.4	13340	8700	7130	6210	5800	5800	1.4	10440	9570
							20	29380	19160	15700	13680	12780	12780	20	23000	21080
							1.6	14490	9450	7750	6740	6300	6300	1.6	11340	10400
							23	31920	20810	17070	14850	13880	13880	23	24980	22910
							2.4	17250	11250	9230	8030	7500	7500	2.4	13500	12380
							35	38000	24780	20330	17690	16520	16520	35	29740	27270
							3.2	20700	13500	11070	9630	9000	9000	3.2	16200	14850
							46	45590	29740	24380	21210	19820	19820	46	35680	32710

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)								
								Speed,km/h(mph)								
		SW	OD					Harvester application						CHO		
		mm	mm	mm	mm	mm		Static	10	20	30	40	50	bar	10	15
		in	in	in	in	in	psi	Static	6	12	19	25	31	psi	6	9
620/75 R26 CHO	DW20B	625 24.6	1610 63.4	775 30.5	4856 191.2	166 A8/B	0.8	5750	3750	3080	2680	2500	2500	0.8	4500	4130
							12	12670	8260	6780	5900	5510	5510	12	9910	9100
							1.6	8910	5810	4770	4150	3875	3880	1.6	6980	6390
							23	19630	12800	10510	9140	8540	8550	23	15370	14070
							2.0	9780	6380	5230	4550	4250	4250	2.0	7650	7010
							29	21540	14050	11520	10020	9360	9360	29	16850	15440
							2.6	10930	7130	5840	5080	4750	4750	2.6	8550	7840
							38	24070	15700	12860	11190	10460	10460	38	18830	17270
							3.2	12190	7950	6520	5670	5300	5300	3.2	9540	8750
							46	26850	17510	14360	12490	11670	11670	46	21010	19270

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)								
								Speed,km/h(mph)								
		SW	OD					Harvester application						CHO		
		mm	mm	mm	mm	mm		Static	10	20	30	40	50	bar	10	15
		in	in	in	in	in	psi	Static	6	12	19	25	31	psi	6	9
620/75 R30 CHO	DW20B	625 24.6	1692 66.6	763 30.0	5103 200.9	169 A8/B	0.8	6100	3980	3260	2840	2650	2650	0.8	4770	4370
							12	13440	8770	7180	6260	5840	5840	12	10510	9630
							1.6	9490	6190	5070	4410	4125	4130	1.6	7430	6810
							23	20900	13630	11170	9710	9090	9100	23	16370	15000
							2.0	10350	6750	5540	4820	4500	4500	2.0	8100	7430
							29	22800	14870	12200	10620	9910	9910	29	17840	16370
							2.6	11500	7500	6150	5350	5000	5000	2.6	9000	8250
							38	25330	16520	13550	11780	11010	11010	38	19820	18170
							3.2	13340	8700	7130	6210	5800	5800	3.2	10440	9570
							46	29380	19160	15700	13680	12780	12780	46	23000	21080

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)								
								Speed,km/h(mph)								
		SW	OD					Harvester application						CHO		
		mm	mm	mm	mm	mm		Static	10	20	30	40	50	bar	10	15
		in	in	in	in	in	psi	Static	6	12	19	25	31	psi	6	9
620/75 R34 CHO	DW20B	625 24.6	1794 70.6	814 32.0	5411 213.0	170 A8/B	0.8	6440	4200	3440	3000	2800	2800	0.8	5040	4620
							12	14190	9250	7580	6610	6170	6170	12	11100	10180
							1.6	10060	6560	5380	4680	4375	4380	1.6	7880	7220
							23	22160	14450	11850	10310	9640	9650	23	17360	15900
							2.0	10930	7130	5840	5080	4750	4750	2.0	8550	7840
							29	24070	15700	12860	11190	10460	10460	29	18830	17270
							2.6	12190	7950	6520	5670	5300	5300	2.6	9540	8750
							38	26850	17510	14360	12490	11670	11670	38	21010	19270
							3.2	13800	9000	7380	6420	6000	6000	3.2	10800	9900
							46	30400	19820	16260	14140	13220	13220	46	23790	21810

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)								
								Speed,km/h(mph)								
		SW	OD					Harvester application						CHO		
		mm	mm	mm	mm	mm		Static	10	20	30	40	50	bar	10	15
		in	in	in	in	in	psi	Static	6	12	19	25	31	psi	6	9
650/75 R32 CHO	DW21B DW20B DW23B	625 24.6	1810 71.3	857 33.7	5459 214.9	172 A8/B	0.8	6670	4350	3570	3100	2900	2900	0.8	5220	4790
							12	14690	9580	7860	6830	6390	6390	12	11500	10550
							1.6	10640	6940	5690	4950	4625	4630	1.6	8330	7630
							23	23440	15290	12530	10900	10190	10200	23	18350	16810
							2.0	11500	7500	6150	5350	5000	5000	2.0	9000	8250
							29	25330	16520	13550	11780	11010	11010	29	19820	18170
							2.6	12540	8180	6700	5830	5450	5450	2.6	9810	8990
							38	27620	18020	14760	12840	12000	12000	38	21610	19800
							3.2	14490	9450	7750	6740	6300	6300	3.2	11340	10400
							46	31920	20810	17070	14850	13880	13880	46	24980	22910



YIELDMAX VFLEX

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
								Speed,km/h(mph)							
		SW	OD					Harvester application						CHO	
		mm	mm	mm	mm	mm	bar	10	20	30	40	50	65	15	30
		in	in	in	in	in	psi	6	12	19	25	31	40	9	19
VF750/ 50R26 CFO	DW25B	750 33.7	1412 90.9	609 39.1	4214 266.9	174D	0.8	3910	3320	3200	3075	3075	3075	4770	4000
							12	8610	7310	7050	6770	6770	6770	10510	8810
							1	4380	3730	3590	3450	3450	3450	5350	4490
							15	9650	8220	7910	7600	7600	7600	11780	9890
							1.6	6030	5130	4940	4750	4750	4750	7360	6180
							23	13280	11300	10880	10460	10460	10460	16210	13610
							2.4	7370	6260	6030	5800	5800	5800	8990	7540
							35	16230	13790	13280	12780	12780	12780	19800	16610
							3.2	8510	7240	6970	6700	6700	6700	10390	8710
							46	18740	15950	15350	14760	14760	14760	22890	19190

ROW CROPS



FEATURES AND BENEFITS

Higher angle & lug
overlap at centre

Better roadability
& stability



Rounded shoulder
Reduced crop damage



Higher number
of lugs
Superior traction



D-rated
(65 kmph) tyres

Improved
transportation speed

Strong carcass
& bead

Higher load
carrying capacity

ROW CROP AGRI RADIAL

TRA CODE : R-1/R-1W



FARMAX RC

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					Constant Load				
		mm	mm	mm	mm	mm	bar	25	40	50	Field Operation	10
		in	in	in	in	in	psi	16	25	31	Field Operation	6
380/90 R46 (14.9 R46)	W12 W11 W13	380 15	1852 72.9	858 33.8	5527 217.6	165 A8/B	4	5320	4790	4790	5510	7190
							58	11720	10550	10550	12140	15840
							4.8	5720	5150	5150	5920	7730
							70	12600	11340	11340	13040	17030
							0.8	1970	1970	2270	2960	2190
							12	4340	4340	5000	6520	4820
							1.6	3070	3070	3530	4610	3410
							23	6760	6760	7780	10150	7510
							2.4	3560	3560	4090	5340	3950
							35	7840	7840	9010	11760	8700
							3.2	4240	4240	4880	6360	4710
							46	9340	9340	10750	14010	10370

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Constant Load						
		mm	mm	mm	mm	mm	bar	Field Operation	10	25	40	50	65	70
		in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44
380/90 R46 (14.9 R46)/3	W12 W13 W11	380 15.0	1852 72.9	858 33.8	5527 217.6	162D 65A8	0.8	2070	2700	2130	1970	1890	1800	1640
							12	4560	5950	4690	4340	4160	3960	3610
							1.6	3220	4200	3320	3070	2940	2800	2550
							23	7090	9250	7310	6760	6480	6170	5620
							2.4	3740	4880	3850	3560	3410	3250	2960
							35	8240	10750	8480	7840	7510	7160	6520
							3.6	4740	6190	4890	4520	4330	4125	3750
							52	10440	13630	10770	9960	9540	9090	8260
							4.0	5030	6560	5180	4790	4590	4375	3980
							58	11080	14450	11410	10550	10110	9640	8770
							4.8	5460	7130	5630	5200	4990	4750	4320
							70	12030	15700	12400	11450	10990	10460	9520

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
		mm	mm	mm	mm	mm	bar	Field Operation	10	25	40	50	65	70
		in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44
380/90 R46 (14.9 R46)	W12 W11 W13	380 15.0	1852 72.9	858 33.8	5527 217.6	159D 62A8	0.8	2070	2700	2130	1970	1890	1800	1640
							12	4560	5950	4690	4340	4160	3960	3610
							1.6	3220	4200	3320	3070	2940	2800	2550
							23	7090	9250	7310	6760	6480	6170	5620
							2.4	3740	4880	3850	3560	3410	3250	2960
							35	8240	10750	8480	7840	7510	7160	6520
							3.2	4460	5810	4590	4240	4070	3875	3530
							46	9820	12800	10110	9340	8960	8540	7780
							3.8	4740	6190	4890	4520	4330	4125	3750
							55	10440	13630	10770	9960	9540	9090	8260
							4.0	5030	6560	5180	4790	4590	4375	3980
							58	11080	14450	11410	10550	10110	9640	8770

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		Speed,km/h(mph)												
		SW	OD	Constant Load										
		mm	mm	mm	mm	mm	bar	Field Operation	10	25	40	50	65	70
		in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44
380/90 R50 (14.9 R50)	W12 W11 W13	390 15.4	1954 76.9	918 36.1	5951 234.3	151D 54A8	0.8	2130	2780	2190	2030	1940	1850	1680
							12	4690	6120	4820	4470	4270	4070	3700
							1.4	3050	3980	3140	2900	2780	2650	2410
							20	6720	8770	6920	6390	6120	5840	5310
							2.0	3620	4730	3730	3450	3310	3150	2870
							29	7970	10420	8220	7600	7290	6940	6320
							2.4	3970	5180	4090	3780	3620	3450	3140
							35	8740	11410	9010	8330	7970	7600	6920

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
		mm	mm	mm	mm	mm	bar	Field Operation	10	25	40	50	65	70
		in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44
380/90 R50 (14.9 R50)	W12 W11 W13	390 15.4	1954 76.9	918 36.1	5951 234.3	158D 61A8	0.8	2130	2780	2190	2030	1940	1850	1680
							12	4690	6120	4820	4470	4270	4070	3700
							1.6	3340	4350	3440	3180	3050	2900	2640
							23	7360	9580	7580	7000	6720	6390	5810
							2.6	4080	5330	4210	3890	3730	3550	3230
							38	8990	11740	9270	8570	8220	7820	7110
							3.2	4600	6000	4740	4380	4200	4000	3640
							46	10130	13220	10440	9650	9250	8810	8020
							3.6	4890	6380	5040	4650	4460	4250	3870
							52	10770	14050	11100	10240	9820	9360	8520

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		Speed,km/h(mph)												
		Constant Load												
		Field Operation	10					25	40	50	65	70		
		Field Operation	6					16	25	31	40	44		
270/80 R32	W9 W8 W10	270 10.6	1245 49.0	581 22.9	3755 147.8	131D 34A8	3.6	2130	2780	2190	2030	1940	1850	1680
							52	4690	6120	4820	4470	4270	4070	3700
							4.0	2240	2930	2310	2140	2050	1950	1770
							58	4930	6450	5090	4710	4520	4300	3900
							0.8	1200	950	880	840	800	730	920
							12	2640	2090	1940	1850	1760	1610	2030
							1.6	1880	1480	1370	1310	1250	1140	1440
							23	4140	3260	3020	2890	2750	2510	3170
							3.2	2630	2070	1920	1840	1750	1590	2010
							46	5790	4560	4230	4050	3850	3500	4430

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		Speed,km/h(mph)												
		SW	OD	Constant Load										
		mm	mm	mm	mm	mm	bar	Field Operation	10	25	40	50	65	70
		in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44
270/95 R32 (11.2 R32)	W9 W8 W10	275 10.8	1327 52.2	613 24.1	4002 157.6	133D 36A8	0.8	1060	1390	1100	1010	970	925	840
							12	2330	3060	2420	2220	2140	2040	1850
							1.6	1670	2180	1720	1590	1520	1450	1320
							23	3680	4800	3790	3500	3350	3190	2910
							2.4	1960	2550	2010	1860	1790	1700	1550
							35	4320	5620	4430	4100	3940	3740	3410
							3.0	2190	2850	2250	2080	2000	1900	1730
							44	4820	6280	4960	4580	4410	4190	3810
							4.0	2370	3090	2440	2260	2160	2060	1870
							58	5220	6810	5370	4980	4760	4540	4120

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		Speed,km/h(mph)												
		Constant Load												
		Field Operation	10					25	40	50	65	70		
		Field Operation	6					16	25	31	40	44		
270/95 R36 (11.2 R36)	W9 W8 W10	275 10.8	1427 56.2	670 26.4	4349 171.2	136D 39A8	0.8	1120	1460	1160	1070	1020	975	890
							12	2470	3220	2560	2360	2250	2150	1960
							1.6	1780	2330	1840	1700	1630	1550	1410
							23	3920	5130	4050	3740	3590	3410	3110
							2.4	2070	2700	2130	1970	1890	1800	1640
							35	4560	5950	4690	4340	4160	3960	3610
							3.4	2510	3270	2580	2390	2290	2180	1980
							49	5530	7200	5680	5260	5040	4800	4360
							4.0	2580	3360	2650	2450	2350	2240	2040
							58	5680	7400	5840	5400	5180	4930	4490

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Constant Load						
		mm	mm	mm	mm	mm	bar	Field Operation	10	25	40	50	65	70
		in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44
270/95 R38 (11.2 R38)	W9 W8 W10	275 10.8	1479 58.2	689 27.1	4507 177.4	137D 40A8	0.8	1150	1500	1190	1100	1050	1000	910
							12	2530	3300	2620	2420	2310	2200	2000
							1.6	1840	2400	1900	1750	1680	1600	1460
							23	4050	5290	4190	3850	3700	3520	3220
							2.4	2130	2780	2190	2030	1940	1850	1680
							35	4690	6120	4820	4470	4270	4070	3700
							3.4	2580	3360	2650	2450	2350	2240	2040
							49	5680	7400	5840	5400	5180	4930	4490
							4.0	2650	3450	2730	2520	2420	2300	2090
							58	5840	7600	6010	5550	5330	5070	4600

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Constant Load						
		mm	mm	mm	mm	mm	bar	Field Operation	10	25	40	50	65	70
		in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44
270/95 R38 (11.2 R38)	W9 W8 W10	275 10.8	1479 58.2	689 27.1	4447 175.1	140D 43A8	0.8	1150	1500	1190	1100	1050	1000	910
							12	2530	3300	2620	2420	2310	2200	2000
							1.6	1840	2400	1900	1750	1680	1600	1460
							23	4050	5290	4190	3850	3700	3520	3220
							2.4	2130	2780	2190	2030	1940	1850	1680
							35	4690	6120	4820	4470	4270	4070	3700
							3.4	2580	3360	2650	2450	2350	2240	2040
							49	5680	7400	5840	5400	5180	4930	4490
							4.6	2880	3750	2960	2740	2630	2500	2280
							67	6340	8260	6520	6040	5790	5510	5020

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Constant Load						
		mm	mm	mm	mm	mm	bar	Field Operation	10	25	40	50	65	70
		in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44
270/95 R42 (11.2 R42)	W9 W8 W10	275 10.8	1581 62.2	740 29.1	4793 188.7	137D 40A8	0.8	1220	1590	1260	1160	1110	1060	960
							12	2690	3500	2780	2560	2440	2330	2110
							1.6	1960	2550	2010	1860	1790	1700	1550
							23	4320	5620	4430	4100	3940	3740	3410
							2.4	2240	2930	2310	2140	2050	1950	1770
							35	4930	6450	5090	4710	4520	4300	3900
							2.8	2440	3180	2510	2320	2230	2120	1930
							41	5370	7000	5530	5110	4910	4670	4250
							3.6	2650	3450	2730	2520	2420	2300	2090
52	5840	7600	6010	5550	5330	5070	4600							

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
		SW	OD					Speed,km/h(mph)							
		mm	mm	mm	mm	mm	bar	Field Operation	10	25	40	50	65	70	
		in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44	
270/95 R42 (11.2 R42	W9 W8 W10	275 10.8	1581 62.2	740 29.1	4793 188.7	139D 42A8	0.8	1220	1590	1260	1160	1110	1060	960	
							12	2690	3500	2780	2560	2440	2330	2110	
							1.6	1960	2550	2010	1860	1790	1700	1550	
							23	4320	5620	4430	4100	3940	3740	3410	
							2.4	2240	2930	2310	2140	2050	1950	1770	
							35	4930	6450	5090	4710	4520	4300	3900	
							3.4	2710	3540	2800	2580	2480	2360	2150	
							49	5970	7800	6170	5680	5460	5200	4740	
							4.0	2790	3650	2880	2660	2550	2430	2210	
58	6150	8040	6340	5860	5620	5350	4870								

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
		mm	mm	mm	mm	mm	bar	Field Operation	10	25	40	50	65	70
		in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44
270/95 R44 (11.2 R44)	W9 W8 W10	275 10.8	1632 64.3	765 30.1	4948 194.8	140D 43A8	0.8	1250	1640	1290	1190	1140	1090	990
							12	2750	3610	2840	2620	2510	2400	2180
							1.6	1960	2550	2010	1860	1790	1700	1550
							23	4320	5620	4430	4100	3940	3740	3410
							2.4	2300	3000	2370	2190	2100	2000	1820
							35	5070	6610	5220	4820	4630	4410	4010
							3.0	2580	3360	2650	2450	2350	2240	2040
							44	5680	7400	5840	5400	5180	4930	4490
							4.0	2880	3750	2960	2740	2630	2500	2280
58	6340	8260	6520	6040	5790	5510	5020							

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
		Speed,km/h(mph)						Constant Load							
		SW	OD					Field Operation	10	25	40	50	65	70	
		mm	mm	mm	mm	mm	bar	Field Operation	6	16	25	31	40	44	
		in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44	
270/95 R44 (11.2 R44)	W9 W8 W10	275 10.8	1632 64.3	765 30.1	4948 194.8	142D 45A8	0.8	1250	1640	1290	1190	1140	1090	990	
							12	2750	3610	2840	2620	2510	2400	2180	
							1.6	1960	2550	2010	1860	1790	1700	1550	
							23	4320	5620	4430	4100	3940	3740	3410	
							2.4	2300	3000	2370	2190	2100	2000	1820	
							35	5070	6610	5220	4820	4630	4410	4010	
							3.0	2580	3360	2650	2450	2350	2240	2040	
							44	5680	7400	5840	5400	5180	4930	4490	
							4.4	3050	3980	3140	2900	2780	2650	2410	
							64	6720	8770	6920	6390	6120	5840	5310	

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		Speed,km/h(mph)												
		SW	OD	Constant Load										
		mm	mm	mm	mm	mm	bar	Field Operation	10	25	40	50	65	70
		in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44
270/95 R46 (11.2 R46)	W9 W8 W10	275 10.8	1682 66.2	790 31.1	5126 201.8	141D 44A8	0.8	1290	1680	1330	1230	1180	1120	1020
							12	2840	3700	2930	2710	2600	2470	2250
							1.6	2010	2630	2070	1920	1840	1750	1590
							23	4430	5790	4560	4230	4050	3850	3500
							2.4	2370	3090	2440	2260	2160	2060	1870
							35	5220	6810	5370	4980	4760	4540	4120
							3.4	2880	3750	2960	2740	2630	2500	2280
							49	6340	8260	6520	6040	5790	5510	5020
							4.0	2960	3860	3050	2820	2700	2575	2340
58	6520	8500	6720	6210	5950	5670	5150							

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
		mm	mm	mm	mm	mm	bar	Field Operation	10	25	40	50	65	70
		in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44
270/95 R48 (11.2 R48)	W9 W8 W10	275 10.8	1733 68.2	816 32.1	5281 207.9	142D 45A8	0.8	1320	1730	1360	1260	1210	1150	1050
							12	2910	3810	3000	2780	2670	2530	2310
							1.6	2070	2700	2130	1970	1890	1800	1640
							23	4560	5950	4690	4340	4160	3960	3610
							2.4	2440	3180	2510	2320	2230	2120	1930
							35	5370	7000	5530	5110	4910	4670	4250
							3.2	2880	3750	2960	2740	2630	2500	2280
							46	6340	8260	6520	6040	5790	5510	5020
							3.6	3050	3980	3140	2900	2780	2650	2410
							52	6720	8770	6920	6390	6120	5840	5310

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		Speed,km/h(mph)												
		SW	OD	Constant Load										
		mm	mm	mm	mm	mm	bar	Field Operation	10	25	40	50	65	70
		in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44
270/95 R54 (11.2 R54)	W9 W8 W10	275 10.8	1886 74.3	892 35.1	5783 227.7	146D 49A8	0.8	1400	1820	1440	1330	1280	1215	1110
							12	3080	4010	3170	2930	2820	2680	2440
							1.6	2240	2930	2310	2140	2050	1950	1770
							23	4930	6450	5090	4710	4520	4300	3900
							2.4	2580	3360	2650	2450	2350	2240	2040
							35	5680	7400	5840	5400	5180	4930	4490
							3.5	3220	4200	3320	3070	2940	2800	2550
							51	7090	9250	7310	6760	6480	6170	5620
							4.0	3450	4500	3560	3290	3150	3000	2730
							58	7600	9910	7840	7250	6940	6610	6010

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Constant Load						
		mm	mm	mm	mm	mm	bar	Field Operation	10	25	40	50	65	70
		in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44
300/95 R46 (12.4 R46)	W9 W10 W11	300 11.8	1738 68.4	1738 68.4	5242 206.4	143D 46A8	0.8	1520	1980	1560	1450	1390	1320	1200
							12	3350	4360	3440	3190	3060	2910	2640
							1.6	2370	3090	2440	2260	2160	2060	1870
							23	5220	6810	5370	4980	4760	4540	4120
							2.4	2790	3650	2880	2660	2550	2430	2210
							35	6150	8040	6340	5860	5620	5350	4870
							2.8	3050	3980	3140	2900	2780	2650	2410
							41	6720	8770	6920	6390	6120	5840	5310
							3.6	3130	4090	3230	2970	2860	2725	2480
							52	6890	9010	7110	6540	6300	6000	5460

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Constant Load						
		mm	mm	mm	mm	mm	bar	Field Operation	10	25	40	50	65	70
		in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44
300/95 R46 (12.4 R46)	W9 W10 W11	300 11.8	1738 68.4	1738 68.4	5242 206.4	148D 51A8	0.8	1520	1980	1560	1450	1390	1320	1200
							12	3350	4360	3440	3190	3060	2910	2640
							1.6	2370	3090	2440	2260	2160	2060	1870
							23	5220	6810	5370	4980	4760	4540	4120
							2.8	3050	3980	3140	2900	2780	2650	2410
							41	6720	8770	6920	6390	6120	5840	5310
							3.8	3540	4610	3640	3370	3230	3075	2800
							55	7800	10150	8020	7420	7110	6770	6170
							4.0	3620	4730	3730	3450	3310	3150	2870
							58	7970	10420	8220	7600	7290	6940	6320

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Constant Load						
		mm	mm	mm	mm	mm	bar	Field Operation	10	25	40	50	65	70
		in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44
300/95 R52 (12.4 R52)	W9 W10 W11	300 11.8	1891 74.4	892 35.1	5792 228.0	149D 52A8	0.8	1610	2100	1660	1530	1470	1400	1270
							12	3550	4630	3660	3370	3240	3080	2800
							1.6	2510	3270	2580	2390	2290	2180	1980
							23	5530	7200	5680	5260	5040	4800	4360
							2.4	2960	3860	3050	2820	2700	2575	2340
							35	6520	8500	6720	6210	5950	5670	5150
							3.4	3540	4610	3640	3370	3230	3075	2800
							49	7800	10150	8020	7420	7110	6770	6170
							4.0	3740	4880	3850	3560	3410	3250	2960
							58	8240	10750	8480	7840	7510	7160	6520

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Constant Load						
		mm	mm	mm	mm	mm	bar	Field Operation	10	25	40	50	65	70
		in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44
320/80 R42	W10	320 12.6	1580 62.2	744 29.3	4815 189.6	141D 44A8	0.8	1360	1770	1400	1290	1240	1180	1070
							12	3000	3900	3080	2840	2730	2600	2360
							1.4	1960	2550	2010	1860	1790	1700	1550
							20	4320	5620	4430	4100	3940	3740	3410
							2.2	2370	3090	2440	2260	2160	2060	1870
							32	5220	6810	5370	4980	4760	4540	4120
							2.8	2790	3650	2880	2660	2550	2430	2210
							41	6150	8040	6340	5860	5620	5350	4870
							3.2	2960	3860	3050	2820	2700	2575	2340
							46	6520	8500	6720	6210	5950	5670	5150

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Constant Load						
		mm	mm	mm	mm	mm	bar	Field Operation	10	25	40	50	65	70
		in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44
320/90 R42	W10 W9 W11 W12	319 12.6	1643 64.7	764 30.1	4950 194.9	136D 39A8	0.8	1520	1980	1560	1450	1390	1320	1200
							12	3350	4360	3440	3190	3060	2910	2640
							1.2	1960	2550	2010	1860	1790	1700	1550
							17	4320	5620	4430	4100	3940	3740	3410
							1.6	2370	3090	2440	2260	2160	2060	1870
							23	5220	6810	5370	4980	4760	4540	4120
							2.4	2580	3360	2650	2450	2350	2240	2040
							35	5680	7400	5840	5400	5180	4930	4490

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Constant Load						
		mm	mm	mm	mm	mm	bar	Field Operation	10	25	40	50	65	70
		in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44
320/90 R42	W10 W9 W11 W12	319 12.6	1643 64.7	764 30.1	4815 189.6	144D 47A8	0.8	1520	1980	1560	1450	1390	1320	1200
							12	3350	4360	3440	3190	3060	2910	2640
							1.6	2370	3090	2440	2260	2160	2060	1550
							23	5220	6810	5370	4980	4760	4540	3410
							2.8	3050	3980	3140	2900	2780	2650	2410
							41	6720	8770	6920	6390	6120	5840	5310
							3.0	3130	4090	3230	2980	2860	2725	2480
							44	6890	9010	7110	6560	6300	6000	5460
							3.6	3220	4200	3320	3070	2940	2800	2550
							52	7090	9250	7310	6760	6480	6170	5620

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Constant Load						
		mm	mm	mm	mm	mm	bar	Field Operation	10	25	40	50	65	70
		in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44
320/90 R46	W10 W9 W11	325 12.8	1744 68.7	817 32.2	5260 207.1	148D 51A8	0.8	1560	2040	1610	1490	1430	1360	1240
							12	3440	4490	3550	3280	3150	3000	2730
							1.6	2510	3270	2580	2390	2290	2180	1980
							23	5530	7200	5680	5260	5040	4800	4360
							2.4	2880	3750	2960	2740	2630	2500	2280
							35	6340	8260	6520	6040	5790	5510	5020
							2.8	3220	4200	3320	3070	2940	2800	2550
							41	7090	9250	7310	6760	6480	6170	5620
							3.6	3620	4730	3730	3450	3310	3150	2870
							52	7970	10420	8220	7600	7290	6940	6320

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Constant Load						
		mm	mm	mm	mm	mm	bar	Field Operation	10	25	40	50	65	70
		in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44
320/90 R46 (14.9 R46)	W12 W13 W11	325 12.8	1744 68.7	817 32.2	5315 209.2	146D 49A8	0.8	1560	2040	1610	1490	1430	1360	1240
							12	3440	4490	3550	3280	3150	3000	2730
							1.6	2510	3270	2580	2390	2290	2180	1980
							23	5530	7200	5680	5260	5040	4800	4360
							2.4	2880	3750	2960	2740	2630	2500	2280
							35	6340	8260	6520	6040	5790	5510	5020
							2.8	3220	4200	3320	3070	2940	2800	2550
							41	7090	9250	7310	6760	6480	6170	5620
							3.2	3450	4500	3560	3290	3150	3000	2730
							46	7600	9910	7840	7250	6940	6610	6010

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Constant Load						
		mm	mm	mm	mm	mm	bar	Field Operation	10	25	40	50	65	70
		in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44
320/90 R50	W10 W9 W11	325 12.8	1846 72.7	867 34.1	5576 219.5	150D/ 153 A8	0.8	1670	2180	1720	1590	1520	1450	1320
							12	3680	4800	3790	3500	3350	3190	2910
							1.6	2580	3360	2650	2450	2350	2240	2040
							23	5680	7400	5840	5400	5180	4930	4490
							2.4	3050	3980	3140	2900	2780	2650	2410
							35	6720	8770	6920	6390	6120	5840	5310
							3.2	3620	4730	3730	3450	3310	3150	2870
							46	7970	10420	8220	7600	7290	6940	6320
							3.6	3850	5030	3970	3670	3520	3350	3050
							52	8480	11080	8740	8080	7750	7380	6720

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)												
		Speed,km/h(mph)																		
		Constant Load																		
		SW	OD											Field Operation	10	25	40	50	65	70
		mm	mm					mm	mm	mm	bar	Field Operation	6	16	25	31	40	44		
in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44								
320/90 R54	W10 W9 W11	325 12.8	1960 77.2	922 36.3	5880 231.5	153D 56A8	0.8	1730	2250	1780	1640	1580	1500	1370						
							12	3810	4960	3920	3610	3480	3300	3020						
							1.6	2700	3530	2780	2570	2470	2350	2140						
							23	5950	7780	6120	5660	5440	5180	4710						
							2.4	3130	4090	3230	2980	2860	2725	2480						
							35	6890	9010	7110	6560	6300	6000	5460						
							3.2	3740	4880	3850	3560	3410	3250	2960						
							46	8240	10750	8480	7840	7510	7160	6520						
							4.0	4200	5480	4330	4000	3830	3650	3320						
							58	9250	12070	9540	8810	8440	8040	7310						

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
		Speed,km/h(mph)													
		Constant Load													
		SW	OD												
		mm	mm					mm	mm	mm	bar	Field Operation	10	25	40
in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44			
340/85 R46	W12 W11	343 13.5	1746 68.7	816 32.1	5310 209.0	147D 50A8	0.8	1670	2180	1720	1590	1520	1450	1320	
							12	3680	4800	3790	3500	3350	3190	2910	
							1.6	2580	3360	2650	2450	2350	2240	2040	
							23	5680	7400	5840	5400	5180	4930	4490	
							2.4	3050	3980	3140	2900	2780	2650	2410	
							35	6720	8770	6920	6390	6120	5840	5310	
							2.8	3340	4350	3440	3180	3050	2900	2640	
							41	7360	9580	7580	7000	6720	6390	5810	
							3.6	3540	4610	3640	3370	3230	3075	2800	
							52	7800	10150	8020	7420	7110	6770	6170	

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)											
		Speed,km/h(mph)																	
		Constant Load																	
		SW	OD										Field Operation	10	25	40	50	65	70
		mm	mm					mm	mm	mm	bar	Field Operation	6	16	25	31	40	44	
in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44							
340/85 R46	W12 W11	343 13.5	1746 68.7	816 32.1	5310 209.0	150D 53A8	0.8	1670	2180	1720	1590	1520	1450	1320					
							12	3680	4800	3790	3500	3350	3190	2910					
							1.8	2650	3450	2730	2520	2420	2300	2090					
							26	5840	7600	6010	5550	5330	5070	4600					
							2.6	3130	4090	3230	2980	2860	2725	2480					
							38	6890	9010	7110	6560	6300	6000	5460					
							2.8	3340	4350	3440	3180	3050	2900	2640					
							41	7360	9580	7580	7000	6720	6390	5810					
							4.0	3850	5030	3970	3670	3520	3350	3050					
							58	8480	11080	8740	8080	7750	7380	6720					

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Constant Load						
		mm	mm	mm	mm	mm	bar	Field Operation	10	25	40	50	65	70
		in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44
340/85 R48	W12 W11	343 13.5	1797 70.7	841 33.1	5476 215.6	148D 51A8	0.8	1670	2180	1720	1590	1520	1450	1320
							12	3680	4800	3790	3500	3350	3190	2910
							1.6	2650	3450	2730	2520	2420	2300	2090
							23	5840	7600	6010	5550	5330	5070	4600
							2.4	3130	4090	3230	2980	2860	2725	2480
							35	6890	9010	7110	6560	6300	6000	5460
							2.8	3450	4500	3560	3290	3150	3000	2730
							41	7600	9910	7840	7250	6940	6610	6010
							3.6	3620	4730	3730	3450	3310	3150	2870
							52	7970	10420	8220	7600	7290	6940	6320

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Constant Load						
		mm	mm	mm	mm	mm	bar	Field Operation	10	25	40	50	65	70
		in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44
340/85 R48	W12 W11	353 13.9	1797 70.7	841 33.1	5521 217.4	156D 59A8	0.8	1670	2180	1720	1590	1520	1450	1320
							12	3680	4800	3790	3500	3350	3190	2910
							1.6	2650	3450	2730	2520	2420	2300	2090
							23	5840	7600	6010	5550	5330	5070	4600
							2.4	3430	4470	3530	3260	3130	2980	2710
							35	7560	9850	7780	7180	6890	6560	5970
							3.2	3620	4730	3730	3450	3310	3150	2870
							46	7970	10420	8220	7600	7290	6940	6320
							4.5	4600	6000	4740	4380	4200	4000	3640
							65	10130	13220	10440	9650	9250	8810	8020

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Constant Load						
		mm	mm	mm	mm	mm	bar	Field Operation	10	25	40	50	65	70
		in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44
38005 R50	W12 W11 W13	400 15.7	2050 80.7	952 37.5	6144 241.9	168D 71A8	0.8	2440	3180	2510	2320	2230	2120	1930
							12	5370	7000	5530	5110	4910	4670	4250
							1.6	3850	5030	3970	3670	3520	3350	3050
							23	8480	11080	8740	8080	7750	7380	6720
							2.4	4880	6360	5020	4640	4450	4240	3860
							35	10750	14010	11060	10220	9800	9340	8500
							3.6	5610	7310	5780	5340	5120	4875	4440
							52	12360	16100	12730	11760	11280	10740	9780
							4.0	5920	7730	6100	5640	5410	5150	4690
							58	13040	17030	13440	12420	11920	11340	10330
							4.4	6440	8400	6640	6130	5880	5600	5100
							64	14190	18500	14630	13500	12950	12330	11230

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
		Speed,km/h(mph)													
		Constant Load													
		SW	OD						Field Operation	10	25	40	50	65	70
		mm	mm	mm	mm	mm	bar	Field Operation	10	25	40	50	65	70	
		in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44	
210/95 R32 (8.3R 32)	W7 W6	214 8.4	1213 47.8	567 22.3	3696 145.5	117D 20A8	0.8	720	950	750	690	660	630	570	
							12	1590	2090	1650	1520	1450	1390	1260	
							1.6	1150	1500	1190	1100	1050	1000	910	
							23	2530	3300	2620	2420	2310	2200	2000	
							2.4	1360	1770	1400	1290	1240	1180	1070	
							35	3000	3900	3080	2840	2730	2600	2360	
							3.2	1480	1930	1520	1410	1350	1285	1170	
							46	3260	4250	3350	3110	2970	2830	2580	

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)							
		Speed,km/h(mph)													
		Constant Load													
		SW	OD												
		mm	mm					mm	mm	mm	bar	Field Operation	10	25	40
		in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44	
210/95 R36 (8.3R36)	W7 W6	214 8.4	1310 51.6	616 24.2	3992 157.2	118D 21A8	0.8	790	1040	820	760	720	690	630	
							12	1740	2290	1810	1670	1590	1520	1390	
							1.6	1220	1590	1260	1160	1110	1060	960	
							23	2690	3500	2780	2560	2440	2330	2110	
							2.4	1440	1880	1480	1370	1310	1250	1140	
							35	3170	4140	3260	3020	2890	2750	2510	
							3.0	1520	1980	1560	1450	1390	1320	1200	
							44	3350	4360	3440	3190	3060	2910	2640	

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)										
								Speed,km/h(mph)										
		SW	OD					Constant Load										
		mm	mm					mm	mm	mm	bar	Field Operation	10	25	40	50	65	70
		in	in					in	in	in	psi	Field Operation	6	16	25	31	40	44
210/95 R44 (8.3R44)	W7 W6	214 8.4	1518 59.8	719 28.3	4626 182.1	120D 23A8	0.8	860	1130	890	820	790	750	680				
							12	1890	2490	1960	1810	1740	1650	1500				
							1.2	1120	1460	1160	1070	1020	975	890				
							17	2470	3220	2560	2360	2250	2150	1960				
							1.8	1530	2000	1580	1460	1400	1330	1210				
							26	3370	4410	3480	3220	3080	2930	2670				
							2.4	1610	2100	1660	1530	1470	1400	1270				
							35	3550	4630	3660	3370	3240	3080	2800				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Constant Load						
		mm	mm	mm	mm	mm	bar	Field Operation	10	25	40	50	65	70
		in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44
230/95 R32	W9 W8 W10	228 9.0	1251 49.3	582 22.9	3793 149.3	128D 31A8	0.8	840	1100	870	800	770	730	660
							12	1850	2420	1920	1760	1700	1610	1450
							1.6	1320	1730	1360	1260	1210	1150	1050
							23	2910	3810	3000	2780	2670	2530	2310
							2.4	1560	2040	1610	1490	1430	1360	1240
							35	3440	4490	3550	3280	3150	3000	2730
							3.4	1840	2400	1900	1750	1680	1600	1460
							49	4050	5290	4190	3850	3700	3520	3220
							4.0	2070	2700	2130	1970	1890	1800	1640
							58	4560	5950	4690	4340	4160	3960	3610

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Constant Load						
		mm	mm	mm	mm	mm	bar	Field Operation	10	25	40	50	65	70
		in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44
230/95 R36	W8 W7 W7	228 9.0	1352 53.2	633 24.9	4035 158.9	127D 30A8	0.8	890	1160	920	850	810	775	710
							12	1960	2560	2030	1870	1780	1710	1560
							1.6	1400	1820	1440	1330	1280	1215	1110
							23	3080	4010	3170	2930	2820	2680	2440
							2.4	1670	2180	1720	1590	1520	1450	1320
							35	3680	4800	3790	3500	3350	3190	2910
							3.0	1840	2400	1900	1750	1680	1600	1460
							44	4050	5290	4190	3850	3700	3520	3220
							4.0	2010	2630	2070	1920	1840	1750	1590
							58	4430	5790	4560	4230	4050	3850	3500

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Constant Load						
		mm	mm	mm	mm	mm	bar	Field Operation	10	25	40	50	65	70
		in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44
230/95 R36	W7 W8	228 9.0	1352 53.2	633 24.9	4035 158.9	130D 33A8	0.8	890	1160	920	850	810	775	710
							12	1960	2560	2030	1870	1780	1710	1560
							1.6	1400	1820	1440	1330	1280	1215	1110
							23	3080	4010	3170	2930	2820	2680	2440
							2.4	1670	2180	1720	1590	1520	1450	1320
							35	3680	4800	3790	3500	3350	3190	2910
							3.4	2140	2790	2200	2040	1950	1860	1690
							49	4710	6150	4850	4490	4300	4100	3720
							4.6	2190	2850	2250	2080	2000	1900	1730
							67	4820	6280	4960	4580	4410	4190	3810

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Constant Load						
		mm	mm	mm	mm	mm	bar	Field Operation	10	25	40	50	65	70
		in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44
230/95 R40	W7 W8	228 9.0	1454 57.2	684 26.9	4340 170.8	132D 35A8	0.8	950	1240	980	900	870	825	750
							12	2090	2730	2160	1980	1920	1820	1650
							1.6	1480	1930	1520	1410	1350	1285	1170
							23	3260	4250	3350	3110	2970	2830	2580
							2.4	1730	2250	1780	1640	1580	1500	1370
							35	3810	4960	3920	3610	3480	3300	3020
							3.2	2070	2700	2130	1970	1890	1800	1640
							46	4560	5950	4690	4340	4160	3960	3610
							3.6	2300	3000	2370	2190	2100	2000	1820
							52	5070	6610	5220	4820	4630	4410	4010

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Constant Load						
		mm	mm	mm	mm	mm	bar	Field Operation	10	25	40	50	65	70
		in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44
230/95 R42	W7 W8	228 9.0	1505 59.3	709 27.9	4492 176.8	133D 36A8	0.8	980	1280	1010	930	890	850	770
							12	2160	2820	2220	2050	1960	1870	1700
							1.6	1520	1980	1560	1450	1390	1320	1200
							23	3350	4360	3440	3190	3060	2910	2640
							2.4	1780	2330	1840	1700	1630	1550	1410
							35	3920	5130	4050	3740	3590	3410	3110
							3.4	2130	2780	2190	2030	1940	1850	1680
							49	4690	6120	4820	4470	4270	4070	3700
							4.0	2370	3090	2440	2260	2160	2060	1870
							58	5220	6810	5370	4980	4760	4540	4120

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Constant Load						
		mm	mm	mm	mm	mm	bar	Field Operation	10	25	40	50	65	70
		in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44
230/95 R44	W7 W8	228 9.0	1556 61.3	735 28.9	4791 188.6	129D 32A8	0.8	1010	1310	1040	960	920	875	800
							12	2220	2890	2290	2110	2030	1930	1760
							1.6	1560	2040	1610	1490	1430	1360	1240
							23	3440	4490	3550	3280	3150	3000	2730
							2.4	1840	2400	1900	1750	1680	1600	1460
							35	4050	5290	4190	3850	3700	3520	3220
							3.0	2070	2700	2130	1970	1890	1800	1640
							44	4560	5950	4690	4340	4160	3960	3610
							3.6	2130	2780	2190	2030	1940	1850	1680
							52	4690	6120	4820	4470	4270	4070	3700

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)											
		Speed,km/h(mph)																	
		Constant Load																	
		SW	OD										Field Operation	10	25	40	50	65	70
		mm	mm					mm	mm	mm	bar	Field Operation	6	16	25	31	40	44	
in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44							
230/95 R44	W7 W8	228 9.0	1556 61.3	735 28.9	4791 188.6	134D 37A8	0.8	1010	1310	1040	960	920	875	800					
							12	2220	2890	2290	2110	2030	1930	1760					
							1.6	1560	2040	1610	1490	1430	1360	1240					
							23	3440	4490	3550	3280	3150	3000	2730					
							2.4	1840	2400	1900	1750	1680	1600	1460					
							35	4050	5290	4190	3850	3700	3520	3220					
							3.0	2070	2700	2130	1970	1890	1800	1640					
							44	4560	5950	4690	4340	4160	3960	3610					
							4.0	2440	3180	2510	2320	2230	2120	1930					
							58	5370	7000	5530	5110	4910	4670	4250					

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)											
		Speed,km/h(mph)																	
		Constant Load																	
		SW	OD										Field Operation	10	25	40	50	65	70
		mm	mm					mm	mm	mm	bar	Field Operation	6	16	25	31	40	44	
in	in	in	in	in	psi	Field Operation	6	16	25	31	40	44							
230/95 R48	W7 W8	228 9.0	1657 65.2	785 30.9	5050 198.8	136D 39A8	0.8	1040	1350	1070	990	950	900	820					
							12	2290	2970	2360	2180	2090	1980	1810					
							1.6	1670	2180	1720	1590	1520	1450	1320					
							23	3680	4800	3790	3500	3350	3190	2910					
							2.4	1900	2480	1960	1810	1730	1650	1500					
							35	4190	5460	4320	3990	3810	3630	3300					
							3.4	2300	3000	2370	2190	2100	2000	1820					
							49	5070	6610	5220	4820	4630	4410	4010					
							4.0	2580	3360	2650	2450	2350	2240	2040					
							58	5680	7400	5840	5400	5180	4930	4490					

RADIAL FLOTATION



FEATURES AND BENEFITS

Directional lug
Superior traction



Robust centre
blocks

Better stability
& roadability



Wider &
flatter crown
Better floating
characteristics



Higher
rubber mass
Longer life



Rounded shoulder
Lesser damage
to soil & crop

FLOATMAX FT AGRI RADIAL

TRA CODE : I-3



FLOATMAX FT

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
		Speed,km/h(mph)															
		Mixed Application															
		SW	OD									Static	10	30	40	50	65
		mm	mm					mm	mm	mm	bar	Static	6	19	25	31	40
in	in	in	in	in	psi	Static											
500/60 R22.5	AG16.00	503 19.8	1172 46.1	530 20.9	3500 137.8	155D 	0.8	2880	2250	1890	1700	1510	1250				
							12	6340	4960	4160	3740	3330	2750				
							1.6	4490	3510	2940	2650	2360	1950				
							23	9890	7730	6480	5840	5200	4300				
							2.4	5920	4640	3890	3500	3120	2575				
							35	13040	10220	8570	7710	6870	5670				
							3.2	7480	5850	4910	4420	3930	3250				
							46	16480	12890	10810	9740	8660	7160				
							3.6	8170	6390	5360	4830	4300	3550				
							52	18000	14070	11810	10640	9470	7820				
							4	8910	6980	5850	5270	4690	3875				
							58	19630	15370	12890	11610	10330	8540				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
		Speed,km/h(mph)											
		Mixed Application											
		SW	OD										
		mm	mm					mm	mm	mm	mm	bar	Static
in	in	in	in	in	in	in	psi	Static	6	19	25	31	40
500/60 R22.5	AG16.00	503 19.8	1172 46.1	530 20.9	3500 137.8	155D 	0.8	2880	2250	1890	1700	1510	1250
							12	6340	4960	4160	3740	3330	2750
							1.6	4490	3510	2940	2650	2360	1950
							23	9890	7730	6480	5840	5200	4300
							2.4	5920	4640	3890	3500	3120	2575
							35	13040	10220	8570	7710	6870	5670
							3.2	7480	5850	4910	4420	3930	3250
							46	16480	12890	10810	9740	8660	7160
							3.6	8170	6390	5360	4830	4300	3550
							52	18000	14070	11810	10640	9470	7820
							4.0	8910	6980	5850	5270	4690	3875
							58	19630	15370	12890	11610	10330	8540

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
		Speed,km/h(mph)															
		Mixed Application															
		SW	OD									Static	10	30	40	50	65
		mm	mm					mm	mm	mm	bar	Static	6	19	25	31	40
in	in	in	in	in	in	psi	Static	6	19	25	31	40					
500/60 R22.5	AG16.00	503 19.8	1172 46.1	530 20.9	3500 137.8	163D 	0.8	2880	2250	1890	1700	1510	1250				
							12	6340	4960	4160	3740	3330	2750				
							1.6	4490	3510	2940	2650	2360	1950				
							23	9890	7730	6480	5840	5200	4300				
							2.4	5920	4640	3890	3500	3120	2575				
							35	13040	10220	8570	7710	6870	5670				
							3.2	7480	5850	4910	4420	3930	3250				
							46	16480	12890	10810	9740	8660	7160				
							4.8	9490	7430	6230	5610	4990	4125				
							70	20900	16370	13720	12360	10990	9090				
							6.0	11210	8780	7360	6630	5900	4875				
							87	24690	19340	16210	14600	13000	10740				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
		Speed,km/h(mph)											
		Mixed Application											
		SW	OD										
		mm	mm					mm	mm	mm	mm	bar	Static
in	in	in	in	in	in	in	psi	Static	6	19	25	31	40
500/60 R22.5	AG16.00	503 19.8	1172 46.1	530 20.9	3500 137.8	163D 	0.8	2880	2250	1890	1700	1510	1250
							12	6340	4960	4160	3740	3330	2750
							1.6	4490	3510	2940	2650	2360	1950
							23	9890	7730	6480	5840	5200	4300
							2.4	5920	4640	3890	3500	3120	2575
							35	13040	10220	8570	7710	6870	5670
							3.2	7480	5850	4910	4420	3930	3250
							46	16480	12890	10810	9740	8660	7160
							4.8	9490	7430	6230	5610	4990	4125
							70	20900	16370	13720	12360	10990	9090
							6.0	11210	8780	7360	6630	5900	4875
							87	24690	19340	16210	14600	13000	10740

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
		Speed,km/h(mph)											
		Mixed Application											
		SW	OD										
		mm	mm					mm	mm	mm	mm	bar	Static
in	in	in	in	in	in	in	psi	Static	6	19	25	31	40
560/45 R22.5	AG16.00	543 21.4	1076 42.4	493 19.4	3279 129.1	152D /	0.8	2650	2070	1740	1560	1390	1150
							12	5840	4560	3830	3440	3060	2530
							1.6	4140	3240	2720	2450	2180	1800
							23	9120	7140	5990	5400	4800	3960
							2.4	5430	4250	3560	3210	2860	2360
							35	11960	9360	7840	7070	6300	5200
							3.2	6900	5400	4530	4080	3630	3000
							46	15200	11890	9980	8990	8000	6610
							3.6	7480	5850	4910	4420	3930	3250
							52	16480	12890	10810	9740	8660	7160
							4.0	8170	6390	5360	4830	4300	3550
							58	18000	14070	11810	10640	9470	7820

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
		Speed,km/h(mph)															
		Mixed Application															
		SW	OD									Static	10	30	40	50	65
		mm	mm					mm	mm	mm	mm	bar	Static	6	19	25	31
in	in	in	in	in	in	psi	Static										
560/45 R22.5	AG16.00	543 21.4	1076 42.4	493 19.4	3279 129.1	152D 	0.8	2650	2070	1740	1560	1390	1150				
							12	5840	4560	3830	3440	3060	2530				
							1.6	4140	3240	2720	2450	2180	1800				
							23	9120	7140	5990	5400	4800	3960				
							2.4	5430	4250	3560	3210	2860	2360				
							35	11960	9360	7840	7070	6300	5200				
							3.2	6900	5400	4530	4080	3630	3000				
							46	15200	11890	9980	8990	8000	6610				
							3.6	7480	5850	4910	4420	3930	3250				
							52	16480	12890	10810	9740	8660	7160				
							4.0	8170	6390	5360	4830	4300	3550				
							58	18000	14070	11810	10640	9470	7820				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
		Speed,km/h(mph)											
		Mixed Application											
		SW	OD										
		mm	mm					mm	mm	mm	mm		
in	in	in	in	in	in	bar	Static	10	30	40	50	65	
							psi	Static	6	19	25	31	40
560/60 R22.5	AG16.00	543 21.4	1244 49.0	562 22.1	3810 150.0	161D 	0.8	3450	2700	2270	2040	1820	1500
							12	7600	5950	5000	4490	4010	3300
							1.6	5290	4140	3470	3130	2780	2300
							23	11650	9120	7640	6890	6120	5070
							2.4	7060	5530	4640	4180	3710	3070
							35	15550	12180	10220	9210	8170	6760
							3.2	8900	6970	5840	5260	4680	3870
							46	19600	15350	12860	11590	10310	8520
							4.0	10640	8330	6980	6290	5600	4625
							58	23440	18350	15370	13850	12330	10190

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
		Speed,km/h(mph)											
		Mixed Application											
		SW	OD										
		mm	mm					mm	mm	mm	mm		
in	in	in	in	in	in	bar	Static	10	30	40	50	65	
							psi	Static	6	19	25	31	40
560/60 R22.5	AG16.00	543 21.4	1244 49.0	562 22.1	3810 150.0	161D 	0.8	3450	2700	2270	2040	1820	1500
							12	7600	5950	5000	4490	4010	3300
							1.6	5290	4140	3470	3130	2780	2300
							23	11650	9120	7640	6890	6120	5070
							2.4	7060	5530	4640	4180	3710	3070
							35	15550	12180	10220	9210	8170	6760
							3.2	8900	6970	5840	5260	4680	3870
							46	19600	15350	12860	11590	10310	8520
							4.0	10640	8330	6980	6290	5600	4625
							58	23440	18350	15370	13850	12330	10190

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm				bar	Static	10	30	40	50	65
		in	in				psi	Static	6	19	25	31	40
560/60 R22.5	AG16.00	543 21.4	1244 49.0	562 22.1	3810 150.0	164D 	0.8	3450	2700	2270	2040	1820	1500
							12	7600	5950	5000	4490	4010	3300
							1.8	5590	4370	3670	3300	2940	2430
							26	12310	9630	8080	7270	6480	5350
							2.8	7940	6210	5210	4690	4170	3450
							41	17490	13680	11480	10330	9190	7600
							3.8	10050	7870	6600	5940	5290	4370
							55	22140	17330	14540	13080	11650	9630
							5.0	11500	9000	7550	6800	6050	5000
							73	25330	19820	16630	14980	13330	11010

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm				bar	Static	10	30	40	50	65
		in	in				psi	Static	6	19	25	31	40
560/60 R22.5	AG16.00	543 21.4	1244 49.0	562 22.1	3810 150.0	164D 	0.8	3450	2700	2270	2040	1820	1500
							12	7600	5950	5000	4490	4010	3300
							1.8	5590	4370	3670	3300	2940	2430
							26	12310	9630	8080	7270	6480	5350
							2.8	7940	6210	5210	4690	4170	3450
							41	17490	13680	11480	10330	9190	7600
							3.8	10050	7870	6600	5940	5290	4370
							55	22140	17330	14540	13080	11650	9630
							5.0	11500	9000	7550	6800	6050	5000
							73	25330	19820	16630	14980	13330	11010

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm				bar	Static	10	30	40	50	65
		in	in				psi	Static	6	19	25	31	40
580/65 R22.5	AG20.00	577 22.7	1326 52.2	595 23.4	4020 158.3	166D 	0.8	3910	3060	2570	2310	2060	1700
							12	8610	6740	5660	5090	4540	3740
							1.6	6100	4770	4000	3600	3210	2650
							23	13440	10510	8810	7930	7070	5840
							2.4	7940	6210	5210	4690	4170	3450
							35	17490	13680	11480	10330	9190	7600
							3.2	10060	7880	6610	5950	5290	4375
							46	22160	17360	14560	13110	11650	9640
							4.0	12190	9540	8000	7210	6410	5300
							58	26850	21010	17620	15880	14120	11670

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm				bar	Static	10	30	40	50	65
		in	in				psi	Static	6	19	25	31	40
580/65 R22.5	AG20.00	577 22.7	1326 52.2	595 23.4	4020 158.3	166D 	0.8	3910	3060	2570	2310	2060	1700
							12	8610	6740	5660	5090	4540	3740
							1.6	6100	4770	4000	3600	3210	2650
							23	13440	10510	8810	7930	7070	5840
							2.4	7940	6210	5210	4690	4170	3450
							35	17490	13680	11480	10330	9190	7600
							3.2	10060	7880	6610	5950	5290	4375
							46	22160	17360	14560	13110	11650	9640
							4.0	12190	9540	8000	7210	6410	5300
							58	26850	21010	17620	15880	14120	11670

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm				bar	Static	10	30	40	50	65
		in	in				psi	Static	6	19	25	31	40
600/50 R22.5	AG20.00	611 24.1	1172 46.1	532 20.9	3479 137.0	159D 	0.8	3220	2520	2110	1900	1690	1400
							12	7090	5550	4650	4190	3720	3080
							1.6	5010	3920	3290	2960	2640	2180
							23	11040	8630	7250	6520	5810	4800
							2.4	6670	5220	4380	3940	3510	2900
							35	14690	11500	9650	8680	7730	6390
							3.2	8400	6570	5510	4960	4420	3650
							46	18500	14470	12140	10930	9740	8040
							4.0	10060	7880	6610	5950	5290	4375
							58	22160	17360	14560	13110	11650	9640

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					Mixed Application				
		mm	mm				bar	Static	10	30	40	50
		in	in				psi	Static	6	19	25	31
600/50 R22.5	AG20.00	611 24.1	1172 46.1	532 20.9	3479 137.0	168B 	1.2	4170	3920	3530	3140	2800
							17	9190	8630	7780	6920	6170
							1.6	5140	4830	4350	3860	3450
							23	11320	10640	9580	8500	7600
							2.0	5960	5600	5040	4480	4000
							29	13130	12330	11100	9870	8810
							2.4	6890	6480	5830	5180	4630
							35	15180	14270	12840	11410	10200
							3.2	8340	7840	7060	6270	5600
							46	18370	17270	15550	13810	12330

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm				bar	Static	10	30	40	50	65
		in	in				psi	Static	6	19	25	31	40
600/55 R26.5	AG20.00	620 24.4	1336 52.6	608 23.9	4050 159.5	165D 	0.8	3800	2970	2490	2240	2000	1650
							12	8370	6540	5480	4930	4410	3630
							1.6	5910	4630	3880	3500	3110	2570
							23	13020	10200	8550	7710	6850	5660
							2.4	7710	6030	5060	4560	4050	3350
							35	16980	13280	11150	10040	8920	7380
							3.2	9780	7650	6420	5780	5140	4250
							46	21540	16850	14140	12730	11320	9360
							4.0	11850	9270	7780	7000	6230	5150
							58	26100	20420	17140	15420	13720	11340

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm				bar	Static	10	30	40	50	65
		in	in				psi	Static	6	19	25	31	40
600/55 R26.5	AG20.00	620 24.4	1336 52.6	608 23.9	4050 159.5	178D 	0.8	3800	2970	2490	2240	2000	1650
							12	8370	6540	5480	4930	4410	3630
							2.0	6670	5220	4380	3940	3510	2900
							29	14690	11500	9650	8680	7730	6390
							3.0	9200	7200	6040	5440	4840	4000
							44	20260	15860	13300	11980	10660	8810
							5.0	13340	10440	8760	7890	7020	5800
							73	29380	23000	19300	17380	15460	12780
							7.0	17250	13500	11330	10200	9080	7500
							102	38000	29740	24960	22470	20000	16520

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm				bar	Static	10	30	40	50	65
		in	in				psi	Static	6	19	25	31	40
600/60 R30.5	AG20.00	611 24.1	1500 59.1	685 27.0	4430 174.4	173D 	0.8	4370	3420	2870	2580	2300	1900
							12	9630	7530	6320	5680	5070	4190
							1.6	6900	5400	4530	4080	3630	3000
							23	15200	11890	9980	8990	8000	6610
							2.4	8910	6980	5850	5270	4690	3875
							35	19630	15370	12890	11610	10330	8540
							3.2	11210	8780	7360	6630	5900	4875
							46	24690	19340	16210	14600	13000	10740
							5.0	14950	11700	9820	8840	7870	6500
							73	32930	25770	21630	19470	17330	14320

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
		Speed,km/h(mph)											
		Mixed Application											
		SW	OD					Static	10	30	40	50	65
		mm	mm	mm	mm	mm	bar	Static	6	19	25	31	40
in	in	in	in	in	in	psi	Static	6	19	25	31	40	
600/60 R30.5	AG20.00	611 24.1	1500 59.1	685 27.0	4430 174.4	173D 	0.8	4370	3420	2870	2580	2300	1900
							12	9630	7530	6320	5680	5070	4190
							1.6	6900	5400	4530	4080	3630	3000
							23	15200	11890	9980	8990	8000	6610
							2.4	8910	6980	5850	5270	4690	3875
							35	19630	15370	12890	11610	10330	8540
							3.2	11210	8780	7360	6630	5900	4875
							46	24690	19340	16210	14600	13000	10740
							5.0	14950	11700	9820	8840	7870	6500
							73	32930	25770	21630	19470	17330	14320

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
								Mixed Application					
		mm	mm	mm	mm	mm	bar	Static	10	30	40	50	65
		in	in	in	in	in	psi	Static	6	19	25	31	40
650/50 R22.5	AG20.00	645 25.4	1230 48.4	559 22.0	3725 146.7	163D 	0.8	3680	2880	2420	2180	1940	1600
							12	8110	6340	5330	4800	4270	3520
							2.0	6670	5220	4380	3940	3510	2900
							29	14690	11500	9650	8680	7730	6390
							3.0	8910	6980	5850	5270	4690	3875
							44	19630	15370	12890	11610	10330	8540
							4.0	11210	8780	7360	6630	5900	4875
							58	24690	19340	16210	14600	13000	10740

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
								Mixed Application					
		SW	OD										
		mm	mm	mm	mm	mm	bar	Static	10	30	40	50	65
in	in	in	in	in	in	psi	Static	6	19	25	31	40	
650/50 R22.5	AG20.00	645 25.4	1230 48.4	559 22.0	3725 146.7	163D 	0.8	3680	2880	2420	2180	1940	1600
							12	8110	6340	5330	4800	4270	3520
							2.0	6670	5220	4380	3940	3510	2900
							29	14690	11500	9650	8680	7730	6390
							3.0	8910	6980	5850	5270	4690	3875
							44	19630	15370	12890	11610	10330	8540
							4.0	11210	8780	7360	6630	5900	4875
							58	24690	19340	16210	14600	13000	10740

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm				bar	Static	10	30	40	50	65
		in	in				psi	Static	6	19	25	31	40
650/55 R26.5	AG20.00	645 25.4	1389 54.7	633 24.9	4220 166.1	178D 	0.8	4260	3330	2790	2520	2240	1850
							12	9380	7330	6150	5550	4930	4070
							2.0	7710	6030	5060	4560	4050	3350
							29	16980	13280	11150	10040	8920	7380
							3.0	10350	8100	6800	6120	5450	4500
							44	22800	17840	14980	13480	12000	9910
							4.0	13340	10440	8760	7890	7020	5800
							58	29380	23000	19300	17380	15460	12780
							5.0	14950	11700	9820	8840	7870	6500
							73	32930	25770	21630	19470	17330	14320
							6.0	17250	13500	11330	10200	9080	7500
							87	38000	29740	24960	22470	20000	16520

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm				bar	Static	10	30	40	50	65
		in	in				psi	Static	6	19	25	31	40
650/55 R26.5	AG20.00	645 25.4	1389 54.7	633 24.9	4220 166.1	178D 	0.8	4260	3330	2790	2520	2240	1850
							12	9380	7330	6150	5550	4930	4070
							2.0	7710	6030	5060	4560	4050	3350
							29	16980	13280	11150	10040	8920	7380
							3.0	10350	8100	6800	6120	5450	4500
							44	22800	17840	14980	13480	12000	9910
							4.0	13340	10440	8760	7890	7020	5800
							58	29380	23000	19300	17380	15460	12780
							5.0	14950	11700	9820	8840	7870	6500
							73	32930	25770	21630	19470	17330	14320
							6.0	17250	13500	11330	10200	9080	7500
							87	38000	29740	24960	22470	20000	16520

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm				bar	Static	10	30	40	50	65
		in	in				psi	Static	6	19	25	31	40
650/60 R26.5	AG20.00	650 25.6	1453 57.2	656 25.8	4291 168.9	173D 	0.8	4600	3600	3160	2720	2420	2000
							12	10130	7930	6960	5990	5330	4410
							1.6	7250	5670	4980	4280	3810	3150
							23	15970	12490	10970	9430	8390	6940
							2.4	9490	7430	6520	5610	4990	4125
							35	20900	16370	14360	12360	10990	9090
							3.0	11210	8780	7700	6630	5900	4875
							44	24690	19340	16960	14600	13000	10740
							3.6	12880	10080	8850	7620	6780	5600
							52	28370	22200	19490	16780	14930	12330
							4.0	14950	11700	10270	8840	7870	6500
							58	32930	25770	22620	19470	17330	14320

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm				bar	Static	10	30	40	50	65
		in	in				psi	Static	6	19	25	31	40
650/65 R26.5	AG20.00	650 25.6	1518 59.8	687 27.1	4597 181.0	174D 	0.8	6000	4700	4120	3550	3160	2610
							12	13220	10350	9070	7820	6960	5750
							1.6	9020	7060	6190	5330	4740	3920
							23	19870	15550	13630	11740	10440	8630
							2.4	11430	8950	7850	6760	6010	4970
							35	25180	19710	17290	14890	13240	10950
							3.0	13020	10190	8940	7700	6850	5660
							44	28680	22440	19690	16960	15090	12470
							3.6	14490	11340	9950	8570	7620	6300
							52	31920	24980	21920	18880	16780	13880
							4.0	15410	12060	10590	9110	8110	6700
							58	33940	26560	23330	20070	17860	14760

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm				bar	Static	10	30	40	50	65
		in	in				psi	Static	6	19	25	31	40
650/65 R30.5	AG20.00	645 25.4	1621 63.8	726 28.6	4909 193.3	176D 	0.8	5290	4140	3630	3130	2780	2300
							12	11650	9120	8000	6890	6120	5070
							1.6	8170	6390	5610	4830	4300	3550
							23	18000	14070	12360	10640	9470	7820
							2.4	10930	8550	7510	6460	5750	4750
							35	24070	18830	16540	14230	12670	10460
							3.0	12880	10080	8850	7620	6780	5600
							44	28370	22200	19490	16780	14930	12330
							3.6	14950	11700	10270	8840	7870	6500
							52	32930	25770	22620	19470	17330	14320
							4.0	16330	12780	11220	9660	8590	7100
							58	35970	28150	24710	21280	18920	15640

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm				bar	Static	10	30	40	50	65
		in	in				psi	Static	6	19	25	31	40
650/65 R30.5	AG20.00	645 25.4	1621 63.8	726 28.6	4909 193.3	176D 	0.8	5290	4140	3630	3130	2780	2300
							12	11650	9120	8000	6890	6120	5070
							1.6	8170	6390	5610	4830	4300	3550
							23	18000	14070	12360	10640	9470	7820
							2.4	10930	8550	7510	6460	5750	4750
							35	24070	18830	16540	14230	12670	10460
							3.0	12880	10080	8850	7620	6780	5600
							44	28370	22200	19490	16780	14930	12330
							3.6	14950	11700	10270	8840	7870	6500
							52	32930	25770	22620	19470	17330	14320
							4.0	16330	12780	11220	9660	8590	7100
							58	35970	28150	24710	21280	18920	15640

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
		Speed,km/h(mph)											
		Mixed Application											
		SW	OD					Static	10	30	40	50	65
		mm	mm	mm	mm	mm	bar	Static	6	19	25	31	40
in	in	in	in	in	in	psi	Static	6	19	25	31	40	
710/40 R22.5	AG24.00	726 28.6	1140 44.9	519 20.4	3367 132.5	161D 	0.8	3450	2700	2270	2040	1820	1500
							12	7600	5950	5000	4490	4010	3300
							1.6	5430	4250	3560	3210	2860	2360
							23	11960	9360	7840	7070	6300	5200
							2.4	7070	5540	4640	4180	3720	3075
							35	15570	12200	10220	9210	8190	6770
							3.2	8910	6980	5850	5270	4690	3875
							46	19630	15370	12890	11610	10330	8540
							4.0	10640	8330	6980	6290	5600	4625
							58	23440	18350	15370	13850	12330	10190

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
		Speed,km/h(mph)											
		Mixed Application											
		SW	OD					Static	10	30	40	50	65
		mm	mm	mm	mm	mm	bar	Static	6	19	25	31	40
in	in	in	in	in	in	psi	Static	6	19	25	31	40	
710/45 R22.5	AG24.00	726 28.6	1212 47.7	542 21.3	3671 144.5	165D 	0.8	3800	2970	2490	2240	2000	1650
							12	8370	6540	5480	4930	4410	3630
							1.8	6270	4910	4110	3710	3300	2725
							26	13810	10810	9050	8170	7270	6000
							2.6	8400	6570	5510	4960	4420	3650
							38	18500	14470	12140	10930	9740	8040
							3.4	10350	8100	6800	6120	5450	4500
							49	22800	17840	14980	13480	12000	9910
							4.0	11850	9270	7780	7000	6230	5150
							58	26100	20420	17140	15420	13720	11340

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
		Speed,km/h(mph)											
		Mixed Application											
		SW	OD					Static	10	30	40	50	65
		mm	mm	mm	mm	mm	bar	Static	6	19	25	31	40
in	in	in	in	in	in	psi	Static	6	19	25	31	40	
710/50 R26.5	AG20.00	710 28.0	1383 54.4	628 24.7	4171 164.2	170D 	0.8	5360	4190	3520	3170	2820	2330
							12	11810	9230	7750	6980	6210	5130
							1.6	8070	6320	5300	4770	4250	3510
							23	17780	13920	11670	10510	9360	7730
							2.4	10240	8010	6720	6050	5380	4450
							35	22560	17640	14800	13330	11850	9800
							3.2	12120	9490	7960	7170	6380	5270
							46	26700	20900	17530	15790	14050	11610
							4.0	13800	10800	9060	8160	7260	6000
							58	30400	23790	19960	17970	15990	13220

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm				bar	Static	10	30	40	50	65
		in	in				psi	Static	6	19	25	31	40
710/50 R30.5	AG20.00 AG24.00	715 28.1	1485 58.5	679 26.7	4385 172.6	173D 	0.8	4740	3710	3110	2800	2490	2060
							12	10440	8170	6850	6170	5480	4540
							1.6	7480	5850	4910	4420	3930	3250
							23	16480	12890	10810	9740	8660	7160
							2.4	10060	7880	6610	5950	5290	4375
							35	22160	17360	14560	13110	11650	9640
							3.2	12540	9810	8230	7410	6590	5450
							46	27620	21610	18130	16320	14520	12000
							4.0	14950	11700	9820	8840	7870	6500
							58	32930	25770	21630	19470	17330	14320

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm				bar	Static	10	30	40	50	65
		in	in				psi	Static	6	19	25	31	40
710/50 R30.5	AG20.00 AG24.00	715 28.1	1485 58.5	679 26.7	4385 172.6	173D 	0.8	4740	3710	3110	2800	2490	2060
							12	10440	8170	6850	6170	5480	4540
							1.6	7480	5850	4910	4420	3930	3250
							23	16480	12890	10810	9740	8660	7160
							2.4	10060	7880	6610	5950	5290	4375
							35	22160	17360	14560	13110	11650	9640
							3.2	12540	9810	8230	7410	6590	5450
							46	27620	21610	18130	16320	14520	12000
							4.0	14950	11700	9820	8840	7870	6500
							58	32930	25770	21630	19470	17330	14320

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm				bar	Static	10	30	40	50	65
		in	in				psi	Static	6	19	25	31	40
750/45 R26.5	AG24.00	754 29.7	1355 53.3	616 24.3	4001 157.5	170D 	0.8	4490	3510	3080	2650	2360	1950
							12	9890	7730	6780	5840	5200	4300
							1.6	7060	5530	4850	4180	3710	3070
							23	15550	12180	10680	9210	8170	6760
							2.4	9200	7200	6320	5440	4840	4000
							35	20260	15860	13920	11980	10660	8810
							3.0	10930	8550	7510	6460	5750	4750
							44	24070	18830	16540	14230	12670	10460
							3.6	12540	9810	8610	7410	6590	5450
							52	27620	21610	18960	16320	14520	12000
							4.0	13800	10800	9480	8160	7260	6000
							58	30400	23790	20880	17970	15990	13220

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm				bar	Static	10	30	40	50	65
		in	in				psi	Static	6	19	25	31	40
750/60 R30.5	AG24.00	754 29.7	1680 66.1	759 29.9	4961 195.3	181D 	0.8	6100	4770	4190	3600	3210	2650
							12	13440	10510	9230	7930	7070	5840
							1.6	9780	7650	6720	5780	5140	4250
							23	21540	16850	14800	12730	11320	9360
							2.4	12880	10080	8850	7620	6780	5600
							35	28370	22200	19490	16780	14930	12330
							3.0	14950	11700	10270	8840	7870	6500
							44	32930	25770	22620	19470	17330	14320
							3.6	17250	13500	11850	10200	9080	7500
							52	38000	29740	26100	22470	20000	16520
							4.0	18980	14850	13040	11220	9980	8250
							58	41810	32710	28720	24710	21980	18170

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm				bar	Static	10	30	40	50	65
		in	in				psi	Static	6	19	25	31	40
750/60 R30.5	AG24.00	754 29.7	1680 66.1	759 29.9	4961 195.3	181D 	0.8	6100	4770	4190	3600	3210	2650
							12	13440	10510	9230	7930	7070	5840
							1.6	9780	7650	6720	5780	5140	4250
							23	21540	16850	14800	12730	11320	9360
							2.4	12880	10080	8850	7620	6780	5600
							35	28370	22200	19490	16780	14930	12330
							3.0	14950	11700	10270	8840	7870	6500
							44	32930	25770	22620	19470	17330	14320
							3.6	17250	13500	11850	10200	9080	7500
							52	38000	29740	26100	22470	20000	16520
							4.0	18980	14850	13040	11220	9980	8250
							58	41810	32710	28720	24710	21980	18170

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm				bar	Static	10	30	40	50	65
		in	in				psi	Static	6	19	25	31	40
800/40 R22.5	AG28.00	790 31.1	1187 46.7	538 21.2	3505 138.0	170D 	0.8	4140	3240	2720	2450	2180	1800
							12	9120	7140	5990	5400	4800	3960
							1.6	6440	5040	4230	3810	3390	2800
							23	14190	11100	9320	8390	7470	6170
							2.4	8630	6750	5660	5100	4540	3750
							35	19010	14870	12470	11230	10000	8260
							3.2	10640	8330	6980	6290	5600	4625
							46	23440	18350	15370	13850	12330	10190
							4.5	13800	10800	9060	8160	7260	6000
							65	30400	23790	19960	17970	15990	13220

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					Mixed Application				
		mm	mm				bar	Static	10	30	40	50
		in	in				psi	Static	6	19	25	31
800/40 R22.5	AG28.00	790 31.1	1187 46.7	538 21.2	3505 138.0	176B 	1.2	5960	5600	5040	4480	4000
							17	13130	12330	11100	9870	8810
							1.6	7050	6630	5960	5300	4730
							23	15530	14600	13130	11670	10420
							2.0	8030	7550	6800	6040	5390
							29	17690	16630	14980	13300	11870
							2.4	8940	8400	7560	6720	6000
							35	19690	18500	16650	14800	13220
							3.2	10580	9940	8950	7960	7100
							46	23300	21890	19710	17530	15640

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm				bar	Static	10	30	40	50	65
		in	in				psi	Static	6	19	25	31	40
800/45 R26.5	AG28.00	808 31.8	1393 54.8	632 24.9	4114 162.0	174D 	0.8	4880	3820	3350	2880	2570	2120
							12	10750	8410	7380	6340	5660	4670
							1.6	7710	6030	5290	4560	4050	3350
							23	16980	13280	11650	10040	8920	7380
							2.4	10350	8100	7110	6120	5450	4500
							35	22800	17840	15660	13480	12000	9910
							3.0	12190	9540	8370	7210	6410	5300
							44	26850	21010	18440	15880	14120	11670
							3.6	14150	11070	9720	8360	7440	6150
							52	31170	24380	21410	18410	16390	13550
							4.0	15410	12060	10590	9110	8110	6700
							58	33940	26560	23330	20070	17860	14760

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm				bar	Static	10	30	40	50	65
		in	in				psi	Static	6	19	25	31	40
800/60 R32	DW27B	800 31.5	1800 70.9	807 31.8	5429 213.7	185D 	0.8	6900	5400	4530	4080	3630	3000
							12	15200	11890	9980	8990	8000	6610
							1.6	10930	8550	7170	6460	5750	4750
							23	24070	18830	15790	14230	12670	10460
							2.4	14490	11340	9510	8570	7620	6300
							35	31920	24980	20950	18880	16780	13880
							3.2	17830	13950	11700	10540	9380	7750
							46	39270	30730	25770	23220	20660	17070
							4.0	21280	16650	13970	12580	11190	9250
							58	46870	36670	30770	27710	24650	20370

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm				bar	Static	10	30	40	50	65
		in	in				psi	Static	6	19	25	31	40
850/40 R26.5	AG28.00	860 33.9	1353 53.3	615 24.2	3996 157.3	173D 	0.8	4880	3820	3200	2880	2570	2120
							12	10750	8410	7050	6340	5660	4670
							1.6	7710	6030	5060	4560	4050	3350
							23	16980	13280	11150	10040	8920	7380
							2.4	10060	7880	6610	5950	5290	4375
							35	22160	17360	14560	13110	11650	9640
							3.2	12540	9810	8230	7410	6590	5450
							46	27620	21610	18130	16320	14520	12000
							4.0	14950	11700	9820	8840	7870	6500
							58	32930	25770	21630	19470	17330	14320

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm				bar	Static	10	30	40	50	65
		in	in				psi	Static	6	19	25	31	40
850/50 R30.5	AG28.00	850 33.5	1625 64.0	736 29.0	4799 188.9	182D 	0.8	6330	4950	4350	3740	3330	2725
							12	13940	10900	9580	8240	7330	6000
							1.6	7870	6160	5400	4650	4140	4375
							23	17330	13570	11890	10240	9120	9640
							2.4	13130	10280	9020	7770	6910	5800
							35	28920	22640	19870	17110	15220	12780
							3.0	15500	12130	10650	9170	8160	6700
							44	34140	26720	23460	20200	17970	14760
							3.6	17990	14080	12360	10640	9460	7750
							52	39630	31010	27220	23440	20840	17070
							4.0	19550	15300	13430	11560	10290	8500
							58	43060	33700	29580	25460	22670	18720

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm				bar	Static	10	30	40	50	65
		in	in				psi	Static	6	19	25	31	40
850/50 R30.5	AG28.00	850 33.5	1625 64.0	736 29.0	4799 188.9	182D 	0.8	6330	4950	4350	3740	3330	2725
							12	13940	10900	9580	8240	7330	6000
							1.6	7870	6160	5400	4650	4140	4375
							23	17330	13570	11890	10240	9120	9640
							2.4	13130	10280	9020	7770	6910	5800
							35	28920	22640	19870	17110	15220	12780
							3.0	15500	12130	10650	9170	8160	6700
							44	34140	26720	23460	20200	17970	14760
							3.6	17990	14080	12360	10640	9460	7750
							52	39630	31010	27220	23440	20840	17070
							4.0	19550	15300	13430	11560	10290	8500
							58	43060	33700	29580	25460	22670	18720

FEATURES AND BENEFITS

Directional lug

Higher traction,
comfortable ride



Robust
centre blocks

Low noise and
smooth run on
hard surface



Flatter crown width

Larger footprint,
lower compaction



Rounded shoulder

Less damage to
soil and crops



Interconnected
grooves

Better self-cleaning
properties

Steel Belted
Construction

Puncture and
stubble damage
protection

FLOATMAX RT AGRI RADIAL

TRA CODE : I-2



FLOATMAX RT

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm					mm	mm	mm	bar	30	40
		in	in	in	in	in	psi	19	25	31	40	Static	6
600/60 R30.5	AG20.00	611 24.1	1500 59.1	685 27	4430 174.4	173D 	3.2	7360	6630	5900	4875	11210	8780
							46	16210	14600	13000	10740	24690	19340
							5.0	9820	8840	7870	6500	14950	11700
							73	21630	19470	17330	14320	32930	25770
							0.8	2580	2300	1900	4370	3420	2870
							12	5680	5070	4190	9630	7530	6320
							1.6	4080	3630	3000	6900	5400	4530
							23	8990	8000	6610	15200	11890	9980
							2.4	5270	4690	3875	8910	6980	5850
							35	11610	10330	8540	19630	15370	12890

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Mixed Application									
		mm	mm					mm	mm	mm	bar	Static	10	30	40	50	65
		in	in					in	in	in	psi	Static	6	19	25	31	40
650/50 R22.5	AG20.00	645 25.4	1230 48.4	559 22.0	3725 146.7	163D /	0.8	3910	3060	2570	2310	2060	1700				
							12	8610	6740	5660	5090	4540	3740				
							2.0	6670	5220	4380	3940	3510	2900				
							29	14690	11500	9650	8680	7730	6390				
							3.0	8910	6980	5850	5270	4690	3875				
							44	19630	15370	12890	11610	10330	8540				
							4.0	11210	8780	7360	6630	5900	4875				
							58	24690	19340	16210	14600	13000	10740				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
		Speed,km/h(mph)											
		SW	OD					Mixed Application					
		mm	mm					mm	mm	mm	bar	Static	10
		in	in	in	in	in	psi	Static	6	19	25	31	40
650/55 R26.5	AG20.00	645 25.4	1389 54.7	633 24.9	4220 166.1	178D 	0.8	4260	3330	2790	2520	2240	1850
							12	9380	7330	6150	5550	4930	4070
							2.0	7710	6030	5060	4560	4050	3350
							29	16980	13280	11150	10040	8920	7380
							3.0	10350	8100	6800	6120	5450	4500
							44	22800	17840	14980	13480	12000	9910
							4.0	13340	10440	8760	7890	7020	5800
							58	29380	23000	19300	17380	15460	12780
							5.0	14950	11700	9820	8840	7870	6500
							73	32930	25770	21630	19470	17330	14320
							6.0	17250	13500	11330	10200	9080	7500
							87	38000	29740	24960	22470	20000	16520

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
		Speed,km/h(mph)											
		SW	OD					Mixed Application					
		mm	mm					mm	mm	mm	bar	Static	10
		in	in	in	in	in	psi	Static	6	19	25	31	40
650/65 R30.5	AG20.00	645 25.4	1621 63.8	726 28.6	4909 193.3	176D 	0.8	5290	4140	3630	3130	2780	2300
							12	11650	9120	8000	6890	6120	5070
							1.6	8170	6390	5610	4830	4300	3550
							23	18000	14070	12360	10640	9470	7820
							2.4	10930	8550	7510	6460	5750	4750
							35	24070	18830	16540	14230	12670	10460
							3.0	12880	10080	8850	7620	6780	5600
							44	28370	22200	19490	16780	14930	12330
							3.6	14950	11700	10270	8840	7870	6500
							52	32930	25770	22620	19470	17330	14320
							4.0	16330	12780	11220	9660	8590	7100
							58	35970	28150	24710	21280	18920	15640

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
		Speed,km/h(mph)											
		SW	OD	Mixed Application									
		mm	mm	mm	mm	mm		bar	Static	10	30	40	50
		in	in	in	in	in	psi	Static	6	19	25	31	40
710/50 R26.5	AG20.00	710 28.0	1383 54.4	628 24.7	4171 164.2	172D /	0.8	4490	3510	2940	2650	2360	1950
							12	9890	7730	6480	5840	5200	4300
							1.8	7480	5850	4910	4420	3930	3250
							26	16480	12890	10810	9740	8660	7160
							2.6	10060	7880	6610	5950	5290	4375
							38	22160	17360	14560	13110	11650	9640
							3.4	12190	9540	8000	7210	6410	5300
							49	26850	21010	17620	15880	14120	11670
							4.4	14490	11340	9510	8570	7620	6300
							64	31920	24980	20950	18880	16780	13880

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
		Speed,km/h(mph)											
		Mixed Application											
		SW	OD					Static	10	30	40	50	65
		mm	mm	mm	mm	mm	bar	Static	6	19	25	31	40
in	in	in	in	in	psi	Static	6	19	25	31	40		
710/50 R26.5	AG20.00	710 28.0	1383 54.4	628 24.7	4171 164.2	181D 	0.8	4490	3510	2940	2650	2360	1950
							12	9890	7730	6480	5840	5200	4300
							1.8	7480	5850	4910	4420	3930	3250
							26	16480	12890	10810	9740	8660	7160
							3.0	10930	8550	7170	6460	5750	4750
							44	24070	18830	15790	14230	12670	10460
							4.8	14950	11700	9820	8840	7870	6500
							70	32930	25770	21630	19470	17330	14320
							6.5	18980	14850	12460	11220	9980	8250
							94	41810	32710	27440	24710	21980	18170

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
		Speed,km/h(mph)											
		Mixed Application											
		SW	OD										
		mm	mm					mm	mm	mm	bar	Static	10
in	in	in	in	in	in	psi	Static	6	19	25	31	40	
710/50 R26.5/3	AG20.00	710 28.0	1383 54.4	628 24.7	4171 164.2	170D 	0.8	4490	3510	2940	2650	2360	1950
							12	9890	7730	6480	5840	5200	4300
							1.6	7070	5540	4640	4180	3720	3075
							23	15570	12200	10220	9210	8190	6770
							2.4	9200	7200	6040	5440	4840	4000
							35	20260	15860	13300	11980	10660	8810
							3.2	11500	9000	7550	6800	6050	5000
							46	25330	19820	16630	14980	13330	11010
							4.0	13800	10800	9060	8160	7260	6000
							58	30400	23790	19960	17970	15990	13220

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		Mixed Application															
		SW	OD									Static	10	30	40	50	65
		mm	mm					mm	mm	mm	bar	Static	6	19	25	31	40
in	in	in	in	in	psi	Static	6	19	25	31	40						
710/50 R30.5	AG20.00 AG24.00	715 28.1	1485 58.5	679 26.7	4385 172.6	173D 	0.8	4740	3710	3110	2800	2490	2060				
							12	10440	8170	6850	6170	5480	4540				
							1.6	7480	5850	4910	4420	3930	3250				
							23	16480	12890	10810	9740	8660	7160				
							2.4	10060	7880	6610	5950	5290	4375				
							35	22160	17360	14560	13110	11650	9640				
							3.2	12540	9810	8230	7410	6590	5450				
							46	27620	21610	18130	16320	14520	12000				
							4.0	14950	11700	9820	8840	7870	6500				
							58	32930	25770	21630	19470	17330	14320				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
		Speed,km/h(mph)															
		SW	OD					Mixed Application									
		mm	mm					mm	mm	mm	bar	Static	10	30	40	50	65
		in	in					in	in	in	psi	Static	6	19	25	31	40
750/60 R30.5	AG24.00	754 29.7	1680 66.1	759 29.9	4961 195.3	181D 	0.8	6100	4770	4190	3600	3210	2650				
							12	13440	10510	9230	7930	7070	5840				
							1.6	9780	7650	6720	5780	5140	4250				
							23	21540	16850	14800	12730	11320	9360				
							2.4	12880	10080	8850	7620	6780	5600				
							35	28370	22200	19490	16780	14930	12330				
							3.0	14950	11700	10270	8840	7870	6500				
							44	32930	25770	22620	19470	17330	14320				
							3.6	17250	13500	11850	10200	9080	7500				
							52	38000	29740	26100	22470	20000	16520				
							4.0	18980	14850	13040	11220	9980	8250				
							58	41810	32710	28720	24710	21980	18170				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm	mm	mm	mm	bar	Static	10	30	40	50	65
		in	in	in	in	in	psi	Static	6	19	25	31	40
850/50 R30.5	AG28.00	850 33.5	1625 64.0	736 29.0	4799 188.9	182D 	0.8	6330	4950	4350	3740	3330	2725
							12	13940	10900	9580	8240	7330	6000
							1.6	7870	6160	5400	4650	4140	4375
							23	17330	13570	11890	10240	9120	9640
							2.4	13130	10280	9020	7770	6910	5800
							35	28920	22640	19870	17110	15220	12780
							3.0	15500	12130	10650	9170	8160	6700
							44	34140	26720	23460	20200	17970	14760
							3.6	17990	14080	12360	10640	9460	7750
							52	39630	31010	27220	23440	20840	17070
							4.0	19550	15300	13430	11560	10290	8500
							58	43060	33700	29580	25460	22670	18720

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm	mm	mm	mm	bar	Static	10	30	40	50	65
		in	in	in	in	in	psi	Static	6	19	25	31	40
385/65 R22.5	AG11.75	389 15.3	1072 42.2	491 19.3	3183 125.3	164D 	4.0	6270	4910	4110	3710	3300	2725
							58	13810	10810	9050	8170	7270	6000
							5.0	7070	5540	4640	4180	3720	3075
							73	15570	12200	10220	9210	8190	6770
							6.0	8170	6390	5360	4830	4300	3550
							87	18000	14070	11810	10640	9470	7820
							8.0	10640	8330	6980	6290	5600	4625
							116	23440	18350	15370	13850	12330	10190
							9.0	11500	9000	7550	6800	6050	5000
							131	25330	19820	16630	14980	13330	11010

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm	mm	mm	mm	bar	Static	10	30	40	50	65
		in	in	in	in	in	psi	Static	6	19	25	31	40
500/60 R22.5	AG16.00	503 19.8	1172 46.1	530 20.9	3500 137.8	155D 	0.8	2880	2250	1890	1700	1510	1250
							12	6340	4960	4160	3740	3330	2750
							1.6	4490	3510	2940	2650	2360	1950
							23	9890	7730	6480	5840	5200	4300
							2.4	5920	4640	3890	3500	3120	2575
							35	13040	10220	8570	7710	6870	5670
							3.2	7480	5850	4910	4420	3930	3250
							46	16480	12890	10810	9740	8660	7160
							3.6	8170	6390	5360	4830	4300	3550
							52	18000	14070	11810	10640	9470	7820
							4.0	8910	6980	5850	5270	4690	3875
							58	19630	15370	12890	11610	10330	8540

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
		Speed,km/h(mph)											
		SW	OD					Mixed Application					
		mm	mm					mm	mm	mm	bar	Static	10
		in	in	in	in	in	psi	Static	6	19	25	31	40
500/60 R22.5	AG16.00	503 19.8	1172 46.1	530 20.9	3500 137.8	163D 	0.8	2880	2250	1890	1700	1510	1250
							12	6340	4960	4160	3740	3330	2750
							1.6	4490	3510	2940	2650	2360	1950
							23	9890	7730	6480	5840	5200	4300
							2.4	5920	4640	3890	3500	3120	2575
							35	13040	10220	8570	7710	6870	5670
							3.2	7480	5850	4910	4420	3930	3250
							46	16480	12890	10810	9740	8660	7160
							4.8	9490	7430	6230	5610	4990	4125
							70	20900	16370	13720	12360	10990	9090
							6.0	11210	8780	7360	6630	5900	4875
							87	24690	19340	16210	14600	13000	10740

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
		Speed,km/h(mph)											
		Mixed Application											
		SW	OD					Static	10	30	40	50	65
mm	mm	mm	mm	mm	bar	Static	6	19	25	31	40		
in	in	in	in	in	psi	Static	6	19	25	31	40		
560/45 R22.5	AG16.00	543 21.4	1076 42.4	493 19.4	3279 129.1	152D 	0.8	2650	2070	1740	1560	1390	1150
							12	5840	4560	3830	3440	3060	2530
							1.6	4140	3240	2720	2450	2180	1800
							23	9120	7140	5990	5400	4800	3960
							2.4	5430	4250	3560	3210	2860	2360
							35	11960	9360	7840	7070	6300	5200
							3.2	6900	5400	4530	4080	3630	3000
							46	15200	11890	9980	8990	8000	6610
							3.6	7480	5850	4910	4420	3930	3250
							52	16480	12890	10810	9740	8660	7160
							4.0	8170	6390	5360	4830	4300	3550
							58	18000	14070	11810	10640	9470	7820

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
		Speed,km/h(mph)											
		Mixed Application											
		SW	OD					Static	10	30	40	50	65
		mm	mm	mm	mm	mm	bar	Static	6	19	25	31	40
in	in	in	in	in	psi	Static	6	19	25	31	40		
560/60 R22.5	AG16.00	543 21.4	1244 49.0	562 22.1	3810 150.0	161D 	0.8	3450	2700	2270	2040	1820	1500
							12	7600	5950	5000	4490	4010	3300
							1.6	5290	4140	3470	3130	2780	2300
							23	11650	9120	7640	6890	6120	5070
							2.4	7060	5530	4640	4180	3710	3070
							35	15550	12180	10220	9210	8170	6760
							3.2	8900	6970	5840	5260	4680	3870
							46	19600	15350	12860	11590	10310	8520
							4.0	10640	8330	6980	6290	5600	4625
							58	23440	18350	15370	13850	12330	10190

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Mixed Application									
		mm	mm					mm	mm	mm	bar	Static	10	30	40	50	65
		in	in					in	in	in	psi	Static	6	19	25	31	40
560/60 R22.5	AG16.00	543 21.4	1244 49.0	562 22.1	3810 150.0	164D 	0.8	3450	2700	2270	2040	1820	1500				
							12	7600	5950	5000	4490	4010	3300				
							1.8	5590	4370	3670	3300	2940	2430				
							26	12310	9630	8080	7270	6480	5350				
							2.8	7940	6210	5210	4690	4170	3450				
							41	17490	13680	11480	10330	9190	7600				
							3.8	10050	7870	6600	5940	5290	4370				
							55	22140	17330	14540	13080	11650	9630				
							5.0	11500	9000	7550	6800	6050	5000				
							73	25330	19820	16630	14980	13330	11010				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
		Speed,km/h(mph)											
		Mixed Application											
		SW	OD										
		mm	mm					mm	mm	mm	mm	mm	
in	in	in	in	in	in	in	in						
560/60 R22.5/3	AG16.00	543 21.4	1244 49.0	562 22.1	3810 150.0	169D 	0.8	3450	2700	2270	2040	1820	1500
							12	7600	5950	5000	4490	4010	3300
							1.2	4370	3420	2870	2580	2300	1900
							17	9630	7530	6320	5680	5070	4190
							2.0	6100	4770	4000	3600	3210	2650
							29	13440	10510	8810	7930	7070	5840
							2.8	7940	6210	5210	4690	4170	3450
							41	17490	13680	11480	10330	9190	7600
							3.6	9780	7650	6420	5780	5140	4250
							52	21540	16850	14140	12730	11320	9360
							4.4	11210	8780	7360	6630	5900	4875
							64	24690	19340	16210	14600	13000	10740
							5.2	12190	9540	8000	7210	6410	5300
							75	26850	21010	17620	15880	14120	11670
							6.0	13340	10440	8760	7890	7020	5800
							87	29380	23000	19300	17380	15460	12780

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Mixed Application									
		mm	mm					mm	mm	mm	bar	Static	10	30	40	50	65
		in	in					in	in	in	psi	Static	6	19	25	31	40
580/65 R22.5	AG20.00	577 22.7	1326 52.2	595 23.4	4020 158.3	166D 	0.8	3910	3060	2570	2310	2060	1700				
							12	8610	6740	5660	5090	4540	3740				
							1.6	6100	4770	4000	3600	3210	2650				
							23	13440	10510	8810	7930	7070	5840				
							2.4	7940	6210	5210	4690	4170	3450				
							35	17490	13680	11480	10330	9190	7600				
							3.2	10060	7880	6610	5950	5290	4375				
							46	22160	17360	14560	13110	11650	9640				
							4.0	12190	9540	8000	7210	6410	5300				
							58	26850	21010	17620	15880	14120	11670				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm					Static	10	30	40	50	65
		in	in	in	in	in	bar	Static	6	19	25	31	40
600/50 R22.5	AG20.00	611 24.1	1172 46.1	532 20.9	3479 137.0	159D 	0.8	3220	2520	2110	1900	1690	1400
							12	7090	5550	4650	4190	3720	3080
							1.6	5010	3920	3290	2960	2640	2180
							23	11040	8630	7250	6520	5810	4800
							2.4	6670	5220	4380	3940	3510	2900
							35	14690	11500	9650	8680	7730	6390
							3.2	8400	6570	5510	4960	4420	3650
							46	18500	14470	12140	10930	9740	8040
							4.0	10060	7880	6610	5950	5290	4375
							58	22160	17360	14560	13110	11650	9640

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm					Static	10	30	40	50	65
		in	in	in	in	in	bar	Static	6	19	25	31	40
600/55 R26.5	AG20.00	620 24.4	1336 52.6	608 23.9	4050 159.5	178D 	0.8	3800	2970	2490	2240	2000	1650
							12	8370	6540	5480	4930	4410	3630
							2.0	6670	5220	4380	3940	3510	2900
							29	14690	11500	9650	8680	7730	6390
							3.0	9200	7200	6040	5440	4840	4000
							44	20260	15860	13300	11980	10660	8810
							5.0	13340	10440	8760	7890	7020	5800
							73	29380	23000	19300	17380	15460	12780
							7.0	17250	13500	11330	10200	9080	7500
							102	38000	29740	24960	22470	20000	16520

FEATURES AND BENEFITS

Non-directional
and robust lugs
High traction



Robust center blocks
Reduced noise &
improved comfort
on hard surfaces



Steel-Belted build
Puncture & stubble
protection, uniform
pressure distribution



Rounded shoulder
Reduced
crop damage



Flat crown width
Larger footprint
for improved
floatation

FLOATMAX CARGO XL

TRA CODE : IMP



FLOATMAX CARGO XL

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm					Static	10	25	40	50	65
		in	in	in	in	in	psi	Static	6	16	25	31	40
28L R26	DW25	715 28.1	1560 61.4	699 27.5	4607 181.4	176D G+/S	0.8	5750	4500	3950	3400	3030	2500
							12	12670	9910	8700	7490	6670	5510
							1.6	8910	6980	6120	5270	4690	3875
							23	19630	15370	13480	11610	10330	8540
							2.4	10060	7880	6910	5950	5290	4375
							35	22160	17360	15220	13110	11650	9640
							2	11850	9270	8140	7000	6230	5150
							29	26100	20420	17930	15420	13720	11340
							3	13800	10800	9480	8160	7260	6000
							44	30400	23790	20880	17970	15990	13220
							3.6	16330	12780	11220	9660	8590	7100
							52	35970	28150	24710	21280	18920	15640

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm					Static	10	25	40	50	65
		in	in	in	in	in	psi	Static	6	16	25	31	40
620/75 R26	DW20B	625 24.6	1590 62.6	711 28.0	4695 184.8	176D /	0.8	5150	4030	3540	3050	2710	2240
							12	11340	8880	7800	6720	5970	4930
							1.2	6670	5220	4580	3940	3510	2900
							17	14690	11500	10090	8680	7730	6390
							1.6	8170	6390	5610	4830	4300	3550
							23	18000	14070	12360	10640	9470	7820
							2.0	9490	7430	6520	5610	4990	4125
							29	20900	16370	14360	12360	10990	9090
							3.0	12880	10080	8850	7620	6780	5600
							44	28370	22200	19490	16780	14930	12330
							4.0	16330	12780	11220	9660	8590	7100
							58	35970	28150	24710	21280	18920	15640

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Mixed Application						
		mm	mm					mm	mm	mm	bar	Static	10	20
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
800/60 R32	DW27B	800 31.5	1800 70.9	807 31.8	5429 213.7	185D G+G	0.8	6120	4920	4560	4230	3870	3510	3000
							12	13480	10840	10040	9320	8520	7730	6610
							1.6	9690	7790	7220	6700	6130	5560	4750
							23	21340	17160	15900	14760	13500	12250	10460
							2.4	12850	10330	9580	8880	8130	7370	6300
							35	28300	22750	21100	19560	17910	16230	13880
							3.2	15810	12710	11780	10930	10000	9070	7750
							46	34820	28000	25950	24070	22030	19980	17070
							4.0	18870	15170	14060	13040	11930	10820	9250
							58	41560	33410	30970	28720	26280	23830	20370

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Mixed Application						
		mm	mm					mm	mm	mm	bar	Static	10	20
		in	in	in	in	in	in	psi	Static	6	12	19	25	31
800/60 R32	DW27B	800 31.5	1800 70.9	807 31.8	5429 213.7	185D G/H	0.8	6120	4920	4560	4230	3870	3510	3000
							12	13480	10840	10040	9320	8520	7730	6610
							1.6	9690	7790	7220	6700	6130	5560	4750
							23	21340	17160	15900	14760	13500	12250	10460
							2.4	12850	10330	9580	8880	8130	7370	6300
							35	28300	22750	21100	19560	17910	16230	13880
							3.2	15810	12710	11780	10930	10000	9070	7750
							46	34820	28000	25950	24070	22030	19980	17070
							4.0	18870	15170	14060	13040	11930	10820	9250
							58	41560	33410	30970	28720	26280	23830	20370

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Mixed Application						
		mm	mm					mm	mm	mm	bar	Static	10	20
		in	in	in	in	in	psi	Static	6	12	19	25	31	40
VF900/ 65 R32	DW30B DW31B	925 36.4	1986 78.2	841 33.1	5880 231.5	197D /	0.8	11830	9510	8820	8180	7480	6790	5800
							12	26060	20950	19430	18020	16480	14960	12780
							1.2	15300	12300	11400	10580	9680	8780	7500
							17	33700	27090	25110	23300	21320	19340	16520
							1.6	18360	14760	13680	12690	11610	10530	9000
							23	40440	32510	30130	27950	25570	23190	19820
							2.0	19890	15990	14820	13750	12580	11410	9750
							29	43810	35220	32640	30290	27710	25130	21480
							2.8	26210	21070	19530	18120	16580	15030	12850
							41	57730	46410	43020	39910	36520	33110	28300

FEATURES AND BENEFITS

Distinctive
tread pattern

Superior handling
and self-cleaning



Robust
center block

Improved stability



Steel-belted
carcass

Enhanced impact
protection

VF Casing

Reduced soil
compaction

FLOATMAX VF X3

TRA CODE : IMP



FLOATMAX VF X3

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)			
								Speed,km/h(mph)			
		SW	OD					Mixed Application			
		mm	mm					mm	mm	mm	bar
		in	in	in	in	in	psi	19	25	31	40
VF560/60 R22.5	AG16.00	556 21.9	1250 49.2	536 21.1	3731 146.9	166D ☞/☞	0.8	3110	2890	2620	2240
							12	6850	6370	5770	4930
							1.4	4520	4190	3800	3250
							20	9960	9230	8370	7160
							2	5910	5480	4970	4250
							29	13020	12070	10950	9360
							2.6	6430	5970	5410	4625
							38	14160	13150	11920	10190
							3.2	7370	6840	6200	5300
							46	16230	15070	13660	11670

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
		Speed,km/h(mph)											
		Mixed Application											
		10	20					30	40	50	65		
		in	in					in	in	in	in		
mm	mm	mm	mm	mm	mm	bar	6	12	19	25	31	40	
VF600/55 R26.5	AG20.00	620 24.4	1348 53.1	586 23.1	4023 158.4	170D 	0.8	3870	3590	3330	3040	2760	2360
							12	8520	7910	7330	6700	6080	5200
							1.6	6150	5700	5290	4840	4390	3750
							23	13550	12560	11650	10660	9670	8260
							2	6770	6270	5820	5320	4830	4125
							29	14910	13810	12820	11720	10640	9090
							2.4	7790	7220	6700	6130	5560	4750
							35	17160	15900	14760	13500	12250	10460
							3.2	9840	9120	8460	7740	7020	6000
							46	21670	20090	18630	17050	15460	13220

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		Speed,km/h(mph)												
		Mixed Application												
		SW	OD											
		mm	mm				mm	mm	mm	mm	bar	10	20	30
in	in	in	in	in	in	psi	6	12	19	25	31	40		
VF650/60 R26.5	AG20.00	665 26.2	1451 57.1	624 24.6	4331 170.5	174D 	0.8	4760	4410	4090	3740	3390	2900	
							12	10480	9710	9010	8240	7470	6390	
							1.6	7380	6840	6350	5810	5270	4500	
							23	16260	15070	13990	12800	11610	9910	
							2.0	8200	7600	7050	6450	5850	5000	
							29	18060	16740	15530	14210	12890	11010	
							2.4	9510	8820	8180	7480	6790	5800	
							35	20950	19430	18020	16480	14960	12780	
							2.8	10990	10180	9450	8640	7840	6700	
							41	24210	22420	20810	19030	17270	14760	

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
		Speed,km/h(mph)												
		Mixed Application												
		SW	OD											
		mm	mm				mm	mm	mm	mm	bar	10	20	30
in	in	in	in	in	in	in	psi	6	12	19	25	31	40	
VF650/65 R26.5	AG20.00	665 26.2	1518 59.8	649 25.6	4530 178.3	179D 	0.8	5330	4940	4580	4190	3800	3250	
							12	11740	10880	10090	9230	8370	7160	
							1.6	8000	7410	6870	6290	5700	4875	
							23	17620	16320	15130	13850	12560	10740	
							2.0	8940	8280	7680	7030	6380	5450	
							29	19690	18240	16920	15480	14050	12000	
							2.4	10330	9580	8880	8130	7370	6300	
							35	22750	21100	19560	17910	16230	13880	
							3.2	12710	11780	10930	10000	9070	7750	
							46	28000	25950	24070	22030	19980	17070	

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		Mixed Application												
		SW	OD											
		mm	mm				mm	mm	mm	bar	10	20	30	40
in	in	in	in	in	psi	6	12	19	25	31	40			
VF750/60 R30.5	AG24.00	780 30.7	1678 66.1	721 28.4	5008 197.2	187D 	0.8	6360	5890	5460	5000	4530	3875	
							12	14010	12970	12030	11010	9980	8540	
							1.6	9840	9120	8460	7740	7020	6000	
							23	21670	20090	18630	17050	15460	13220	
							2.0	10990	10180	9450	8640	7840	6700	
							29	24210	22420	20810	19030	17270	14760	
							2.4	12710	11780	10930	10000	9070	7750	
							35	28000	25950	24070	22030	19980	17070	
							3.2	15990	14820	13750	12580	11410	9750	
46	35220	32640	30290	27710	25130	21480								

RADIAL IMPLEMENT



FEATURES AND BENEFITS

Rib pattern

Wider footprint &
lower ground
pressure



Special shoulder
design

Strong grip



Lugs with rounded
shoulders

Excellent self-
cleaning capabilities



Steel belted
construction

Protection from
punctures



FARM IMPLEMENT 800R

TRA CODE : IMP



FARM IMPLEMENT 800R

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
								Free Rolling		
		SW	OD							
		mm	mm	mm	mm	mm	bar	10	40	50
		in	in	in	in	in	psi	6	25	31
380/55 R16.5	12	380 15	840 33.1	378 14.9	2454 96.6	150A8 38A8 	0.8	1530	1090	980
							12	3370	2400	2160
							1.6	2040	1460	1310
							23	4490	3220	2890
							2.4	2420	1730	1560
							35	5330	3810	3440
							3.2	2730	1950	1760
							46	6010	4300	3880
							4.0	3010	2150	1940
							58	6630	4740	4270
							5.0	3300	2360	2120
							73	7270	5200	4670

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)		
		SW	OD					Speed,km/h(mph)		
								Free Rolling		
								mm	mm	mm
in	in	in	in	in	psi	6	25	31		
440/55 R18	14	420 16.5	940 37.0	422 16.6	2746 108.1	159A8 47A8 	0.8	2810	2010	1810
							12	6190	4430	3990
							1.6	3780	2700	2430
							23	8330	5950	5350
							2.4	4490	3210	2890
							35	9890	7070	6370
							3.2	5070	3620	3260
							46	11170	7970	7180
							4.0	5320	3800	3420
							58	11720	8370	7530
							5.0	6130	4375	3940
							73	13500	9640	8680

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm					Static	10	30	40	50	65
		in	in					psi	6	19	25	31	40
500/50 R17	16	503 19.8	932 36.7	416 16.4	2723 107.2	151D 	0.8	2130	1670	1400	1260	1120	925
							12	4690	3680	3080	2780	2470	2040
							2.4	4490	3510	2940	2650	2360	1950
							35	9890	7730	6480	5840	5200	4300
							3.2	5640	4410	3700	3330	2960	2450
							46	12420	9710	8150	7330	6520	5400
							5.5	7940	6210	5210	4690	4170	3450
							80	17490	13680	11480	10330	9190	7600

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm					Static	10	30	40	50	65
		in	in					psi	6	19	25	31	40
620/40 R22.5	AG20.00	620 24.4	1080 42.5	489 19.3	3155 124.2	154D 	0.8	2790	2190	1830	1650	1470	1215
							12	6150	4820	4030	3630	3240	2680
							1.6	4370	3420	2870	2580	2300	1900
							23	9630	7530	6320	5680	5070	4190
							2.4	5750	4500	3780	3400	3030	2500
							35	12670	9910	8330	7490	6670	5510
							3.2	7250	5670	4760	4280	3810	3150
							46	15970	12490	10480	9430	8390	6940
							3.6	7940	6210	5210	4690	4170	3450
							52	17490	13680	11480	10330	9190	7600
							4.0	8630	6750	5660	5100	4540	3750
							58	19010	14870	12470	11230	10000	8260

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Mixed Application					
		mm	mm					Static	10	30	40	50	65
		in	in					psi	6	19	25	31	40
620/50 R22.5	AG20.00	620 24.4	1192 46.9	534 21.0	3483 137.1	161D /	0.8	3340	2610	2190	1970	1750	1450
							12	7360	5750	4820	4340	3850	3190
							1.6	5290	4140	3470	3130	2780	2300
							23	11650	9120	7640	6890	6120	5070
							2.4	7070	5540	4640	4180	3720	3075
							35	15570	12200	10220	9210	8190	6770
							3.2	8630	6750	5660	5100	4540	3750
							46	19010	14870	12470	11230	10000	8260
							3.6	9490	7430	6230	5610	4990	4125
							52	20900	16370	13720	12360	10990	9090
							4.0	10640	8330	6980	6290	5600	4625
							58	23440	18350	15370	13850	12330	10190

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
								Mixed Application						
								Static	10	20	30	40	50	65
							bar	Static	6	12	19	25	31	40
		mm	mm	mm	mm	mm	psi							
		in	in	in	in	in								
VF445/ 50 R22.5	AG14.00	445 17.5	1016 40.0	457 18.0	2968 116.9	167D 	0.8	3130	2450	2490	2050	1850	1650	1360
							12	6890	5400	5480	4520	4070	3630	3000
							2.0	5750	4500	4580	3780	3400	3030	2500
							29	12670	9910	10090	8330	7490	6670	5510
							3.0	6900	5400	5480	4530	4080	3630	3000
							44	15200	11890	12070	9980	8990	8000	6610
							4.0	9490	7430	7530	6230	5610	4990	4125
							58	20900	16370	16590	13720	12360	10990	9090
							5.0	10060	7880	7990	6610	5950	5290	4375
							73	22160	17360	17600	14560	13110	11650	9640
							6.0	11210	8780	8910	7360	6630	5900	4875
							87	24690	19340	19630	16210	14600	13000	10740
							6.7	12540	8940	9700	7680	7030	6380	5450
							97	27620	19690	21370	16920	15480	14050	12000

FEATURES AND BENEFITS



**HI-FLEX
IMPLEMENT**

TRA CODE : IMP



HI-FLEX IMPLEMENT

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)			
								Speed,km/h(mph)			
		SW	OD					Mixed Application			
		mm	mm					10	20	30	40 - 65
		in	in	in	in	in	psi	6	12	19	25 - 40
IF 240/80 R15	8LB	245 9.6	765 30.1	339 13.3	2271 89.4	125D	0.8	710	600	580	560
							12	1560	1320	1280	1230
							1.2	900	770	740	710
							17	1980	1700	1630	1560
							1.6	930	790	760	730
							23	2050	1740	1670	1610
							2.4	1460	1240	1200	1150
							35	3220	2730	2640	2530
							3.6	2100	1780	1720	1650
							52	4630	3920	3790	3630

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)			
								Speed,km/h(mph)			
		SW	OD					Mixed Application			
		mm	mm					10	20	30	40 - 65
		in	in	in	in	in	psi	6	12	19	25 - 40
IF 265/85 R15	8LB	270 10.6	831 32.7	364 14.3	2467 97.1	129D	0.8	880	750	720	690
							12	1940	1650	1590	1520
							1.2	1110	950	910	875
							17	2440	2090	2000	1930
							1.6	1380	1180	1130	1090
							23	3040	2600	2490	2400
							2.4	1840	1570	1510	1450
							35	4050	3460	3330	3190
							3.6	2350	2000	1920	1850
							52	5180	4410	4230	4070

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)			
								Speed,km/h(mph)			
		SW	OD					Mixed Application			
		mm	mm					10	20	30	40 - 65
		in	in	in	in	in	psi	6	12	19	25 - 40
IF 280/70 R15	W8	280 11.0	773 30.4	342 13.5	2295 90.4	137D	0.8	800	680	660	630
							12	1760	1500	1450	1390
							2.0	1500	1270	1230	1180
							29	3300	2800	2710	2600
							3.0	1970	1670	1610	1550
							44	4340	3680	3550	3410
							4.0	2480	2110	2030	1950
							58	5460	4650	4470	4300
							4.8	2920	2480	2390	2300
							70	6430	5460	5260	5070

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)			
								Speed,km/h(mph)			
								Mixed Application			
		SW	OD								
		mm	mm					mm	mm	mm	bar
		in	in	in	in	in	psi	6	12	19	25 - 40
IF 320/70 R15	W10	320 12.6	829 32.6	364 14.3	2461 96.9	146D	0.8	1140	970	940	900
							12	2510	2140	2070	1980
							2.0	2030	1730	1660	1600
							29	4470	3810	3660	3520
							3.0	2630	2240	2150	2070
							44	5790	4930	4740	4560
							4.0	3260	2780	2670	2570
							58	7180	6120	5880	5660
							5.2	3810	3240	3120	3000
75	8390	7140	6870	6610							

AGRO INDUSTRIAL



FEATURES AND BENEFITS



**LOAD PRO
HARD SURFACE**

TRA CODE : R-4



LOAD PRO HARD SURFACE

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)												
								Speed,km/h(mph)												
		SW	OD					Constant Load						Cyclic Operation						
		mm	mm					mm	mm	mm	bar	Static	10	20	30	40	50	bar	10	15
		in	in					in	in	in	psi	Static	6	12	19	25	31	psi	6	9
340/80 R18	W11 W10 W12	343 13.5	1001 39.4	445 17.5	2987 117.6	143 A8/B	1.6	3010	1640	1430	1360	1310	1310	1.6	1970	1760				
							23	6630	3610	3150	3000	2890	2890	23	4340	3880				
							2.2	3890	2110	1840	1760	1690	1690	2.2	2540	2260				
							32	8570	4650	4050	3880	3720	3720	32	5590	4980				
							3.2	5240	2850	2490	2370	2280	2280	3.2	3420	3060				
							46	11540	6280	5480	5220	5020	5020	46	7530	6740				
							4.0	6270	3410	2970	2830	2725	2725	4	4090	3650				
							58	13810	7510	6540	6230	6000	6000	58	9010	8040				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)												
								Speed,km/h(mph)												
		SW	OD					Constant Load						Cyclic Operation						
		mm	mm					mm	mm	mm	mm	bar	10	20	30	40	50	bar	10	15
		in	in					in	in	in	in	psi	Static	6	12	19	25	31	psi	6
405/70 R18	13 12	404 15.9	1025 40.4	456 18.0	3059 120.4	147 A8/B	1.6	3380	1840	1600	1530	1470	1470	1.6	2210	1970				
							23	7440	4050	3520	3370	3240	3240	23	4870	4340				
							2.2	4370	2380	2070	1980	1900	1900	2.2	2850	2550				
							32	9630	5240	4560	4360	4190	4190	32	6280	5620				
							3.2	5910	3210	2800	2670	2570	2570	3.2	3860	3440				
							46	13020	7070	6170	5880	5660	5660	46	8500	7580				
							4.0	7070	3840	3350	3200	3075	3075	4.0	4610	4120				
							58	15570	8460	7380	7050	6770	6770	58	10150	9070				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)													
								Speed,km/h(mph)													
		SW	OD					Constant Load						Cyclic Operation							
		mm	mm					mm	mm	mm	mm	bar	Static	10	20	30	40	50	bar	10	15
		in	in					in	in	in	in	psi	Static	6	12	19	25	31	psi	6	9
405/70 R20	13 14	404 15.9	1068 42.0	475 18.7	3187 125.5	149 A8/B	1.6	3800	2060	1800	1720	1650	1650	1.6	2480	2210					
							23	8370	4540	3960	3790	3630	3630	23	5460	4870					
							2.2	4650	2530	2200	2100	2020	2020	2.2	3030	2710					
							32	10240	5570	4850	4630	4450	4450	32	6670	5970					
							3.2	6260	3400	2960	2830	2720	2720	3.2	4080	3640					
							46	13790	7490	6520	6230	5990	5990	46	8990	8020					
							4.0	7480	4060	3540	3380	3250	3250	4.0	4880	4360					
							58	16480	8940	7800	7440	7160	7160	58	10750	9600					

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)													
								Speed,km/h(mph)													
		SW	OD					Constant Load						Cyclic Operation							
		mm	mm					mm	mm	mm	mm	bar	Static	10	20	30	40	50	bar	10	15
		in	in					in	in	in	in	psi	Static	6	12	19	25	31	psi	6	9
460/70 R24	W15L W16L	455 17.9	1254 49.4	566 22.3	3750 147.6	159 A8/B	1.6	4830	2630	2290	2180	2100	2100	1.6	3150	2810					
							23	10640	5790	5040	4800	4630	4630	23	6940	6190					
							2.4	6670	3630	3160	3020	2900	2900	2.4	4350	3890					
							35	14690	8000	6960	6650	6390	6390	35	9580	8570					
							3.0	7980	4340	3780	3610	3470	3470	3.0	5210	4650					
							44	17580	9560	8330	7950	7640	7640	44	11480	10240					
							3.6	9250	5030	4380	4180	4020	4020	3.6	6030	5390					
							52	20370	11080	9650	9210	8850	8850	52	13280	11870					
							4.0	10060	5470	4770	4550	4375	4375	4.0	6560	5860					
							58	22160	12050	10510	10020	9640	9640	58	14450	12910					

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)													
								Speed,km/h(mph)													
		SW	OD					Constant Load						Cyclic Operation							
		mm	mm					mm	mm	mm	mm	bar	Static	10	20	30	40	50	bar	10	15
		in	in					in	in	in	in	psi	Static	6	12	19	25	31	psi	6	9
460/70 R24	W15L W16L	455 17.9	1254 49.4	566 22.3	3750 147.6	159 A8/B	1.6	4830	2630	2290	2180	2100	2100	1.6	3150	2810					
							23	10640	5790	5040	4800	4630	4630	23	6940	6190					
							2.4	6670	3630	3160	3020	2900	2900	2.4	4350	3890					
							35	14690	8000	6960	6650	6390	6390	35	9580	8570					
							3.0	7980	4340	3780	3610	3470	3470	3.0	5210	4650					
							44	17580	9560	8330	7950	7640	7640	44	11480	10240					
							3.6	9250	5030	4380	4180	4020	4020	3.6	6030	5390					
							52	20370	11080	9650	9210	8850	8850	52	13280	11870					
							4.0	10060	5470	4770	4550	4375	4375	4.0	6560	5860					
							58	22160	12050	10510	10020	9640	9640	58	14450	12910					

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)													
								Speed,km/h(mph)													
		SW	OD					Constant Load						Cyclic Operation							
		mm	mm					mm	mm	mm	mm	bar	Static	10	20	30	40	50	bar	10	15
		in	in					in	in	in	in	psi	Static	6	12	19	25	31	psi	6	9
480/80 R26	DW15L DW16L DW18L	479 18.9	1428 56.2	636 25.0	4262 167.8	160 A8/B	1.6	6270	3410	2970	2830	2725	2725	1.6	4090	3650					
							23	13810	7510	6540	6230	6000	6000	23	9010	8040					
							2.2	6900	3750	3270	3120	3000	3000	2.2	4500	4020					
							32	15200	8260	7200	6870	6610	6610	32	9910	8850					
							2.8	9290	5050	4400	4200	4040	4040	2.8	6060	5410					
							41	20460	11120	9690	9250	8900	8900	41	13350	11920					
							3.2	10350	5630	4910	4680	4500	4500	3.2	6750	6030					
							46	22800	12400	10810	10310	9910	9910	46	14870	13280					

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)								
								Speed,km/h(mph)								
		SW	OD					Constant Load						Cyclic Operation		
		mm	mm					Static	10	20	30	40	50	bar	10	15
		in	in					psi	6	12	19	25	31	psi	6	9
500/70 R24	DW16L DW15L DW18L	503 19.8	1310 51.6	617 24.3	3921 154.4	164 A8/B	1.6	5750	3130	2730	2600	2500	2500	1.6	3750	3350
							23	12670	6890	6010	5730	5510	5510	23	8260	7380
							2.2	6270	3410	2970	2830	2725	2725	2.2	4090	3650
							32	13810	7510	6540	6230	6000	6000	32	9010	8040
							2.8	8400	4560	3980	3800	3650	3650	2.8	5480	4890
							41	18500	10040	8770	8370	8040	8040	41	12070	10770
							3.4	9780	5310	4630	4420	4250	4250	3.4	6380	5700
							49	21540	11700	10200	9740	9360	9360	49	14050	12560
							4.0	11500	6250	5450	5200	5000	5000	4.0	7500	6700
							58	25330	13770	12000	11450	11010	11010	58	16520	14760

FEATURES AND BENEFITS

Greater lug
overlap and more
lugs in footprint

Uniform load
distribution



Steel belted radial
construction

Protection from
punctures



Extra reinforced
sidewalls

Additional
lateral stability

Strong bead

Better carcass
strength and load
carrying capacity

LOAD PRO RADIAL

TRA CODE : R-4



LOAD PRO

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					Constant load				
		mm	mm					50	10	20	30	40
		in	in	in	in	in	psi	31	6	12	19	25
405/70 R24	13 W12 DW14L	404 15.9	1170 46.1	527 20.7	3529 138.9	152 A8/B	4.0	3550	4440	3870	3690	3550
							58	7820	9780	8520	8130	7820
							1.6	2250	1960	1870	1800	1800
							23	4960	4320	4120	3960	3960
							2.2	2440	2130	2030	1950	1950
							32	5370	4690	4470	4300	4300
							3.2	3630	3160	3020	2900	2900
							46	8000	6960	6650	6390	6390

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					Constant load				
		mm	mm					10	20	30	40	50
		in	in	in	in	in	psi	6	12	19	25	31
440/80 R24	DW14L W15L W16L	441 17.4	1314 51.7	591 23.3	3942 155.2	161 A8/B	1.6	2880	2510	2390	2300	2300
							23	6340	5530	5260	5070	5070
							2.2	3130	2730	2600	2500	2500
							32	6890	6010	5730	5510	5510
							3.0	4440	3870	3690	3550	3550
							44	9780	8520	8130	7820	7820
							4.0	5780	5040	4810	4625	4625
							58	12730	11100	10590	10190	10190

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					Constant load				
		mm	mm					10	20	30	40	50
		in	in	in	in	in	psi	6	12	19	25	31
440/80 R28	DW14L W15L W16L	441 17.4	1415 55.7	637 25.1	4245 167.1	156 A8/B	1.6	3130	2730	2600	2500	2500
							23	6890	6010	5730	5510	5510
							2.2	3410	2970	2830	2725	2725
							32	7510	6540	6230	6000	6000
							2.8	4560	3980	3800	3650	3650
							41	10040	8770	8370	8040	8040
							3.2	5000	4360	4160	4000	4000
							46	11010	9600	9160	8810	8810

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					Constant load				
		mm	mm				bar	10	20	30	40	50
		in	in				psi	6	12	19	25	31
460/70 R24	W15L W16L	455 17.9	1254 49.4	566 22.3	3750 147.6	159 A8/B	1.6	2730	2380	2270	2180	2180
							23	6010	5240	5000	4800	4800
							2.4	3500	3050	2910	2800	2800
							35	7710	6720	6410	6170	6170
							3.0	4310	3760	3590	3450	3450
							44	9490	8280	7910	7600	7600
							3.6	5000	4360	4160	4000	4000
							52	11010	9600	9160	8810	8810
							4.0	5470	4770	4550	4375	4375
							58	12050	10510	10020	9640	9640

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					Constant load				
		mm	mm				bar	10	20	30	40	50
		in	in				psi	6	12	19	25	31
460/70 R24	W15L W16L	455 17.9	1254 49.4	566 22.3	3750 147.6	159 A8/B	1.6	2730	2380	2270	2180	2180
							23	6010	5240	5000	4800	4800
							2.4	3500	3050	2910	2800	2800
							35	7710	6720	6410	6170	6170
							3.0	4310	3760	3590	3450	3450
							44	9490	8280	7910	7600	7600
							3.6	5000	4360	4160	4000	4000
							52	11010	9600	9160	8810	8810
							4.0	5470	4770	4550	4375	4375
							58	12050	10510	10020	9640	9640

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					Constant load				
		mm	mm				bar	10	20	30	40	50
		in	in				psi	6	12	19	25	31
460/70 R24	W15L W16L	455 17.9	1254 49.4	566 22.3	3750 147.6	159 A8/B	1.6	2730	2380	2270	2180	2180
							23	6010	5240	5000	4800	4800
							2.4	3500	3050	2910	2800	2800
							35	7710	6720	6410	6170	6170
							3.0	4310	3760	3590	3450	3450
							44	9490	8280	7910	7600	7600
							3.6	5000	4360	4160	4000	4000
							52	11010	9600	9160	8810	8810
							4.0	5470	4770	4550	4375	4375
							58	12050	10510	10020	9640	9640

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
								Constant load				
		SW	OD				bar	10	20	30	40	50
		mm	mm				psi	6	12	19	25	31
480/80 R26	DW15L DW16L DW18L	479 18.9	1428 56.2	636 25.0	4262 167.8	160 A8/B	1.6	3410	2970	2830	2725	2725
							3410	2970	2830	2725	2725	23
							7510	6540	6230	6000	6000	7510
							6540	6230	6000	6000	2.2	3750
							3270	3120	3000	3000	3750	3270
							3120	3000	3000	32	8260	7200
							6870	6610	6610	8260	7200	6870
							6610	6610	2.8	5000	4360	4160
							4000	4000	41	11010	9600	9160
							8810	8810	3.2	5630	4910	4680
							4500	4500	5630	4910	4680	4500
							4500	46	12400	10810	10310	9910
							9910	12400	10810	10310	9910	9910
							4.0	6810	5940	5670	5450	5450
							58	15000	13080	12490	12000	12000

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
								Constant load				
		SW	OD				bar	10	20	30	40	50
		mm	mm				psi	6	12	19	25	31
480/80 R26	DW15L DW16L DW18L	479 18.9	1428 56.2	636 25.0	4262 167.8	160 A8/B	1.6	3410	2970	2830	2725	2725
							3410	2970	2830	2725	2725	23
							7510	6540	6230	6000	6000	7510
							6540	6230	6000	6000	2.2	3750
							3270	3120	3000	3000	3750	3270
							3120	3000	3000	32	8260	7200
							6870	6610	6610	8260	7200	6870
							6610	6610	2.8	5000	4360	4160
							4000	4000	41	11010	9600	9160
							8810	8810	3.2	5630	4910	4680
							4500	4500	5630	4910	4680	4500
							4500	46	12400	10810	10310	9910
							9910	12400	10810	10310	9910	9910
							4.0	6810	5940	5670	5450	5450
							58	15000	13080	12490	12000	12000

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					Constant load				
		mm	mm				bar	10	20	30	40	50
		in	in				psi	6	12	19	25	31
500/70 R24	DW16L DW15L DW18L	503 19.8	1310 51.6	617 24.3	3921 154.4	164 A8/B	1.6	3000	2620	2500	2400	2400
							23	6610	5770	5510	5290	5290
							2.2	3880	3380	3220	3100	3100
							32	8550	7440	7090	6830	6830
							2.8	4700	4100	3910	3760	3760
							41	10350	9030	8610	8280	8280
							3.4	5490	4790	4570	4390	4390
							49	12090	10550	10070	9670	9670
							4.0	6250	5450	5200	5000	5000
							58	13770	12000	11450	11010	11010

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					Constant load				
		mm	mm				bar	10	20	30	40	50
		in	in				psi	6	12	19	25	31
500/70 R24	DW16L DW15L DW18L	503 19.8	1310 51.6	617 24.3	3921 154.4	164 A8/B	1.6	3000	2620	2500	2400	2400
							23	6610	5770	5510	5290	5290
							2.2	3880	3380	3220	3100	3100
							32	8550	7440	7090	6830	6830
							2.8	4700	4100	3910	3760	3760
							41	10350	9030	8610	8280	8280
							3.4	5490	4790	4570	4390	4390
							49	12090	10550	10070	9670	9670
							4.0	6250	5450	5200	5000	5000
							58	13770	12000	11450	11010	11010

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					Constant load				
		mm	mm				bar	10	20	30	40	50
		in	in				psi	6	12	19	25	31
500/70 R28	W15L W16L W18L	503 19.8	1411 55.6	667 26.3	4233 166.7	164 A8/B	1.6	3410	2970	2830	2725	2725
							23	7510	6540	6230	6000	6000
							2.2	3630	3160	3020	2900	2900
							32	8000	6960	6650	6390	6390
							2.6	4560	3980	3800	3650	3650
							38	10040	8770	8370	8040	8040
							3.0	5160	4500	4290	4125	4125
							44	11370	9910	9450	9090	9090
							4.0	6250	5450	5200	5000	5000
							58	13770	12000	11450	11010	11010

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					Constant load				
		mm	mm				bar	10	20	30	40	50
		in	in				psi	6	12	19	25	31
280/80 R18	W9 W10	282 11.1	905 35.6	412 16.2	2715 106.9	132 A8/B	1.6	1250	1090	1040	1000	1000
							23	2750	2400	2290	2200	2200
							2.0	1480	1290	1230	1180	1180
							29	3260	2840	2710	2600	2600
							3.0	1940	1690	1610	1550	1550
							44	4270	3720	3550	3410	3410
							4.0	2500	2180	2080	2000	2000
							58	5510	4800	4580	4410	4410

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					Constant load				
		mm	mm				bar	10	20	30	40	50
		in	in				psi	6	12	19	25	31
280/80 R20	W9 W10	282 11.1	956 37.6	430 16.9	2868 112.9	133 A8/B	1.6	1330	1160	1100	1060	1060
							23	2930	2560	2420	2330	2330
							2.0	1560	1360	1300	1250	1250
							29	3440	3000	2860	2750	2750
							3.0	2060	1800	1720	1650	1650
							44	4540	3960	3790	3630	3630
							4.0	2580	2250	2140	2060	2060
							58	5680	4960	4710	4540	4540

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					Constant load				
		mm	mm				bar	10	20	30	40	50
		in	in				psi	6	12	19	25	31
300/75 R18	W9 W10	295 11.6	908 35.7	409 16.1	2724 107.3	142 A8/B	1.6	1330	1160	1100	1060	1060
							23	2930	2560	2420	2330	2330
							3.0	2060	1800	1720	1650	1650
							44	4540	3960	3790	3630	3630
							4.0	2650	2310	2200	2120	2120
							58	5840	5090	4850	4670	4670
							5.0	3310	2890	2760	2650	2650
							73	7290	6370	6080	5840	5840

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					Constant load				
		mm	mm				bar	10	20	30	40	50
		in	in				psi	6	12	19	25	31
340/80 R18	W11 W10 W12	343 13.5	1001 39.4	445 17.5	2987 117.6	143 A8/B	1.6	1700	1480	1410	1360	1360
							23	3740	3260	3110	3000	3000
							2.0	2000	1740	1660	1600	1600
							29	4410	3830	3660	3520	3520
							3.0	2650	2310	2200	2120	2120
							44	5840	5090	4850	4670	4670
							4.0	3410	2970	2830	2725	2725
							58	7510	6540	6230	6000	6000

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					Constant load				
		mm	mm				bar	10	20	30	40	50
		in	in				psi	6	12	19	25	31
340/80 R18	W11 W10 W12	343 13.5	1001 39.4	445 17.5	2987 117.6	143 A8/B	1.6	1700	1480	1410	1360	1360
							23	3740	3260	3110	3000	3000
							2.0	2000	1740	1660	1600	1600
							29	4410	3830	3660	3520	3520
							3.0	2650	2310	2200	2120	2120
							44	5840	5090	4850	4670	4670
							4.0	3410	2970	2830	2725	2725
							58	7510	6540	6230	6000	6000

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					Constant load				
		mm	mm				bar	10	20	30	40	50
		in	in				psi	6	12	19	25	31
380/75 R20	W12 W11 W13	380 15.0	1078 42.4	485 19.1	3234 127.3	148 A8/B	1.6	2000	1740	1660	1600	1600
							23	4410	3830	3660	3520	3520
							2.0	2380	2070	1980	1900	1900
							29	5240	4560	4360	4190	4190
							3.0	3130	2730	2600	2500	2500
							44	6890	6010	5730	5510	5510
							4.0	3940	3430	3280	3150	3150
							58	8680	7560	7220	6940	6940

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					Constant load				
		mm	mm				bar	10	20	30	40	50
		in	in				psi	6	12	19	25	31
400/70 R20	W13L W12L W14	404 15.9	1067 42.0	475 18.7	3201 126.0	149 A8/B	1.6	2060	1800	1720	1650	1650
							23	4540	3960	3790	3630	3630
							2.2	2500	2180	2080	2000	2000
							32	5510	4800	4580	4410	4410
							3.2	3310	2890	2760	2650	2650
							46	7290	6370	6080	5840	5840
							4.0	4060	3540	3380	3250	3250
							58	8940	7800	7440	7160	7160

FEATURES AND BENEFITS

Unique R1 pattern
Excellent traction



Strong nylon casing
& thick sidewall

High radial &
lateral stability



Deep under tread
Improved puncture
resistance

LIFT PRO

TRA CODE : R-1



LIFT PRO

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
								Constant Load	
		SW	OD						
		mm	mm					mm	mm
		in	in	in	in	in	bar	30-Jan	30/2
		in	in	in	in	in	psi	19-Jan	19-Feb
15.5/80-24	13	395	1250	562	3650	16	4	4875	3450
		16	49	22	144	16	58	10749	7607

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)												
								Speed,km/h(mph)												
		SW	OD					Constant Load						Cyclic Operation						
		mm	mm					mm	mm	mm	mm	bar	10	20	30	40	50	bar	10	15
		in	in					in	in	in	in	psi	Static	6	12	19	25	31	psi	6
60/70 R24	W15L W16L	455 17.9	1254 49.4	566 22.3	3750 147.6	159 A8/B	1.2	4970	2700	2350	2250	2160	2160	1.2	3240	2890				
							17	10950	5950	5180	4960	4760	4760	17	7140	6370				
							1.6	5890	3200	2790	2660	2560	2560	1.6	3840	3430				
							23	12970	7050	6150	5860	5640	5640	23	8460	7560				
							2.8	8170	4440	3870	3690	3550	3550	2.8	5330	4760				
							41	18000	9780	8520	8130	7820	7820	41	11740	10480				
							3.2	8830	4800	4190	3990	3840	3840	3.2	5760	5150				
							46	19450	10570	9230	8790	8460	8460	46	12690	11340				
							4.0	10060	5470	4770	4550	4375	4375	4.0	6560	5860				
							58	22160	12050	10510	10020	9640	9640	58	14450	12910				


FEATURES AND BENEFITS

Higher tread depth
Provides superior
traction and longer life



Rounded shoulder
design

Helps with low soil
compaction



Lawnmax tread design
Better self-cleaning



Directional tread pattern
Minimizes wear



LAWNMAX



LAWNMAX

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		Constant Load															
		SW	OD									Static	10	20	30	40	50
		mm	mm					mm	mm	mm	bar	Static	6	12	19	25	31
in	in	in	in	in	psi	Static	6	12	19	25	31						
200/60 R15	W7	200 7.9	621 24.4	287 11.3	1892 74.5	83 A8/B	0.8	630	410	330	290	272	272				
							12	1390	900	730	640	600	600				
							1.2	820	530	440	380	355	355				
							17	1810	1170	970	840	780	780				
							1.4	920	600	490	430	400	400				
							20	2030	1320	1080	950	880	880				
							1.9	1120	730	600	520	487	487				
							28	2470	1610	1320	1150	1070	1070				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Constant Load									
		mm	mm					mm	mm	mm	bar	Static	10	20	30	40	50
		in	in					in	in	in	psi	Static	6	12	19	25	31
200/65 R16	W6	200 7.9	666 26.2	308 12.1	1988 78.3	94 A8/B	0.8	750	490	400	307	325	325				
							12	1650	1080	880	680	720	720				
							1.2	950	620	510	387	412	412				
							17	2090	1370	1120	850	910	910				
							1.6	1180	770	630	475	515	515				
							23	2600	1700	1390	1050	1130	1130				
							2.4	1540	1010	820	720	670	670				
							35	3390	2220	1810	1590	1480	1480				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		Constant Load															
		SW	OD									Static	10	20	30	40	50
		mm	mm					mm	mm	mm	bar	Static	6	12	19	25	31
in	in	in	in	in	psi	Static	6	12	19	25	31						
200/70 R16	W6	197 7.8	686 27.0	316 12.4	2037 80.2	94D	0.8	750	490	400	350	325	325				
							12	1650	1080	880	770	720	720				
							1.2	950	620	510	440	412	412				
							17	2090	1370	1120	970	910	910				
							1.6	1180	770	630	550	515	515				
							23	2600	1700	1390	1210	1130	1130				
							2.4	1540	1010	820	720	670	670				
							35	3390	2220	1810	1590	1480	1480				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Constant Load									
		mm	mm					mm	mm	mm	bar	Static	10	20	30	40	50
		in	in					in	in	in	in	psi	Static	6	12	19	25
200/70 R16	W6	197 7.8	686 27.0	316 12.4	2037 80.2	94D	0.8	750	490	400	350	325	325				
							12	1650	1080	880	770	720	720				
							1.2	950	620	510	440	412	412				
							17	2090	1370	1120	970	910	910				
							1.6	1180	770	630	550	515	515				
							23	2600	1700	1390	1210	1130	1130				
							2.4	1540	1010	820	720	670	670				
							35	3390	2220	1810	1590	1480	1480				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
		Speed,km/h(mph)															
		Constant Load															
		SW	OD					mm	mm	mm	bar	Static	10	20	30	40	50
		mm	mm									Static	6	12	19	25	31
in	in	in	in	in	psi	Static	6	12	19	25	31						
215/65 R14	J7 J6 J6.5	220 8.7	636 25.0	290 11.4	1888 74.3	90 A8/B	0.8	720	470	390	340	315	315				
							12	1590	1040	860	750	690	690				
							1.0	840	550	450	390	365	365				
							15	1850	1210	990	860	800	800				
							1.4	1040	680	550	480	450	450				
							20	2290	1500	1210	1060	990	990				
							1.6	1150	750	620	540	500	500				
							23	2530	1650	1370	1190	1100	1100				
							2.1	1380	900	740	640	600	600				
							30	3040	1980	1630	1410	1320	1320				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					Constant Load									
		mm	mm					mm	mm	mm	bar	Static	10	20	30	40	50
		in	in					in	in	in	in	psi	Static	6	12	19	25
220/55 R12	7.00J 7JA	221 8.7	550 21.7	250 9.8	1641 64.6	82 A8/B	0.8	750	490	400	350	325	325				
							12	1650	1080	880	770	720	720				
							1.4	980	640	520	450	425	425				
							20	2160	1410	1150	990	940	940				
							1.8	1180	770	630	550	515	515				
							26	2600	1700	1390	1210	1130	1130				
							2.4	1090	710	580	510	475	475				
							35	2400	1560	1280	1120	1050	1050				

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Constant Load					
		mm	mm					Static	10	20	30	40	50
		in	in					psi	6	12	19	25	31
240/60 R12	8.00B 7.50B 7.00B	242 9.5	593 23.3	268 10.6	1770 69.7	89 A8/B	0.8	750	490	400	350	325	325
							12	1650	1080	880	770	720	720
							1.2	980	640	520	450	425	425
							17	2160	1410	1150	990	940	940
							1.6	1180	770	630	550	515	515
							23	2600	1700	1390	1210	1130	1130
							1.9	1330	870	710	620	580	580
							28	2930	1920	1560	1370	1280	1280

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Constant Load					
		mm	mm					Static	10	20	30	40	50
		in	in					psi	6	12	19	25	31
240/70 R16	W8 W9	244 9.6	742 29.2	338 13.3	2215 87.2	104D 07A8	0.8	980	640	520	450	425	425
							12	2160	1410	1150	990	940	940
							1.2	1250	820	670	580	545	545
							17	2750	1810	1480	1280	1200	1200
							1.6	1540	1010	820	720	670	670
							23	3390	2220	1810	1590	1480	1480
							2.4	2070	1350	1110	960	900	900
							35	4560	2970	2440	2110	1980	1980

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Constant Load					
		mm	mm					Static	10	20	30	40	50
		in	in					psi	6	12	19	25	31
240/70 R16	W8 W9	244 9.6	742 29.2	338 13.3	2215 87.2	104D 07A8	0.8	980	640	520	450	425	425
							12	2160	1410	1150	990	940	940
							1.2	1250	820	670	580	545	545
							17	2750	1810	1480	1280	1200	1200
							1.6	1540	1010	820	720	670	670
							23	3390	2220	1810	1590	1480	1480
							2.4	2070	1350	1110	960	900	900
							35	4560	2970	2440	2110	1980	1980

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Constant Load					
		mm	mm					Static	10	20	30	40	50
		in	in					psi	6	12	19	25	31
260/70 R16	W8 W9	258 10.2	770 30.3	349 13.7	2298 90.5	109D 12A8	0.8	1120	730	600	520	487	487
							12	2470	1610	1320	1150	1070	1070
							1.2	1410	920	760	660	615	615
							17	3110	2030	1670	1450	1350	1350
							1.6	1730	1130	920	800	750	750
							23	3810	2490	2030	1760	1650	1650
							2.4	2370	1550	1270	1100	1030	1030
							35	5220	3410	2800	2420	2270	2270

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Constant Load					
		mm	mm					Static	10	20	30	40	50
		in	in					Static	6	12	19	25	31
260/70 R16	W8 W9	258 10.2	770 30.3	349 13.7	2298 90.5	109D 12A8	0.8	1120	730	600	520	487	487
							12	2470	1610	1320	1150	1070	1070
							1.2	1410	920	760	660	615	615
							17	3110	2030	1670	1450	1350	1350
							1.6	1730	1130	920	800	750	750
							23	3810	2490	2030	1760	1650	1650
							2.4	2370	1550	1270	1100	1030	1030
							35	5220	3410	2800	2420	2270	2270

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Constant Load					
		mm	mm					Static	10	20	30	40	50
		in	in					Static	6	12	19	25	31
260/70 R18	W8 W9	258 10.2	821 32.3	375 14.8	2476 97.5	114 A8/B	0.8	1180	770	630	550	515	515
							12	2600	1700	1390	1210	1130	1130
							1.2	1500	980	800	700	650	650
							17	3300	2160	1760	1540	1430	1430
							1.6	1840	1200	980	860	800	800
							23	4050	2640	2160	1890	1760	1760
							2.8	2710	1770	1450	1260	1180	1180
							41	5970	3900	3190	2780	2600	2600

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Constant Load					
		mm	mm					Static	10	20	30	40	50
		in	in					Static	6	12	19	25	31
260/70 R28	W8L W9 W10	286 11.3	800 31.5	361 14.2	2362 93.0	112 A8/B	0.8	1180	770	630	550	515	515
							12	2600	1700	1390	1210	1130	1130
							1.2	1500	980	800	700	650	650
							17	3300	2160	1760	1540	1430	1430
							1.6	1840	1200	980	860	800	800
							23	4050	2640	2160	1890	1760	1760
							2.8	2710	1770	1450	1260	1180	1180
							41	5970	3900	3190	2780	2600	2600

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Constant Load					
		mm	mm					Static	10	20	30	40	50
		in	in					Static	6	12	19	25	31
280/70 R16	W8L W9 W10	282 11.1	798 31.4	360 14.2	2382 93.8	112D 15A8	0.8	1250	820	670	580	545	545
							12	2750	1810	1480	1280	1200	1200
							1.2	1590	1040	850	740	690	690
							17	3500	2290	1870	1630	1520	1520
							1.6	1960	1280	1050	910	850	850
							23	4320	2820	2310	2000	1870	1870
							2.4	2580	1680	1380	1200	1120	1120
							35	5680	3700	3040	2640	2470	2470

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Constant Load					
		mm	mm					Static	10	20	30	40	50
		in	in					psi	6	12	19	25	31
280/70 R16	W8L W9 W10	282 11.1	798 31.4	360 14.2	2382 93.8	112D 15A8	0.8	1250	820	670	580	545	545
							12	2750	1810	1480	1280	1200	1200
							1.2	1590	1040	850	740	690	690
							17	3500	2290	1870	1630	1520	1520
							1.6	1960	1280	1050	910	850	850
							23	4320	2820	2310	2000	1870	1870
							2.4	2580	1680	1380	1200	1120	1120
							35	5680	3700	3040	2640	2470	2470

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Constant Load					
		mm	mm					Static	10	20	30	40	50
		in	in					psi	6	12	19	25	31
280/70 R18	W8L W9 W10	282 11.1	849 33.4	386 15.2	2534 99.8	114D 17A8	0.8	1330	870	710	620	580	580
							12	2930	1920	1560	1370	1280	1280
							1.2	1680	1100	900	780	730	730
							17	3700	2420	1980	1720	1610	1610
							1.6	2070	1350	1110	960	900	900
							23	4560	2970	2440	2110	1980	1980
							2.4	2710	1770	1450	1260	1180	1180
							35	5970	3900	3190	2780	2600	2600

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Constant Load					
		mm	mm					Static	10	20	30	40	50
		in	in					psi	6	12	19	25	31
280/70 R18	W8L W9 W10	282 11.1	849 33.4	386 15.2	2534 99.8	114D 17A8	0.8	1330	870	710	620	580	580
							12	2930	1920	1560	1370	1280	1280
							1.2	1680	1100	900	780	730	730
							17	3700	2420	1980	1720	1610	1610
							1.6	2070	1350	1110	960	900	900
							23	4560	2970	2440	2110	1980	1980
							2.4	2710	1770	1450	1260	1180	1180
							35	5970	3900	3190	2780	2600	2600

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Constant Load					
		mm	mm					Static	10	20	30	40	50
		in	in					psi	6	12	19	25	31
280/70 R18	W8L W9 W10	282 11.1	849 33.4	386 15.2	2534 99.8	114D 17A8	0.8	1330	870	710	620	580	580
							12	2930	1920	1560	1370	1280	1280
							1.2	1680	1100	900	780	730	730
							17	3700	2420	1980	1720	1610	1610
							1.6	2070	1350	1110	960	900	900
							23	4560	2970	2440	2110	1980	1980
							2.4	2710	1770	1450	1260	1180	1180
							35	5970	3900	3190	2780	2600	2600

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Constant Load					
		mm	mm					Static	10	20	30	40	50
		in	in					psi	6	12	19	25	31
300/70 R20	W9 W10	295 11.6	952 37.5	432 17.0	2826 111.3	110 A8/B	0.8	1540	1010	820	720	670	670
							12	3390	2220	1810	1590	1480	1480
							1.0	1730	1130	920	800	750	750
							15	3810	2490	2030	1760	1650	1650
							1.2	1960	1280	1050	910	850	850
							17	4320	2820	2310	2000	1870	1870
							1.4	2190	1430	1170	1020	950	950
							20	4820	3150	2580	2250	2090	2090
							1.6	2440	1590	1300	1130	1060	1060
							23	5370	3500	2860	2490	2330	2330

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Constant Load					
		mm	mm					Static	10	20	30	40	50
		in	in					psi	6	12	19	25	31
320/65 R18	W10 W9 W11	319 12.6	873 34.4	395 15.6	2619 103.1	109D	0.8	1500	980	800	700	650	650
							12	3300	2160	1760	1540	1430	1430
							1.2	1960	1280	1050	910	850	850
							17	4320	2820	2310	2000	1870	1870
							1.4	2190	1430	1170	1020	950	950
							20	4820	3150	2580	2250	2090	2090
							1.6	2370	1550	1270	1100	1030	1030
							23	5220	3410	2800	2420	2270	2270

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Constant Load					
		mm	mm					Static	10	20	30	40	50
		in	in					psi	6	12	19	25	31
320/65 R18	W10 W9 W11	319 12.6	873 34.4	395 15.6	2619 103.1	109D	0.8	1500	980	800	700	650	650
							12	3300	2160	1760	1540	1430	1430
							1.2	1960	1280	1050	910	850	850
							17	4320	2820	2310	2000	1870	1870
							1.4	2190	1430	1170	1020	950	950
							20	4820	3150	2580	2250	2090	2090
							1.6	2370	1550	1270	1100	1030	1030
							23	5220	3410	2800	2420	2270	2270

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Constant Load					
		mm	mm					Static	10	20	30	40	50
		in	in					psi	6	12	19	25	31
320/70 R20	W10 W9 W11	319 12.6	982 38.7	444 17.5	2931 115.4	113 A8/B	0.8	1680	1100	900	780	730	730
							12	3700	2420	1980	1720	1610	1610
							1.2	2190	1430	1170	1020	950	950
							17	4820	3150	2580	2250	2090	2090
							1.4	2440	1590	1300	1130	1060	1060
							20	5370	3500	2860	2490	2330	2330
							1.6	2650	1730	1410	1230	1150	1150
							23	5840	3810	3110	2710	2530	2530

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Constant Load					
		mm	mm					Static	10	20	30	40	50
		in	in					psi	6	12	19	25	31
320/85 R28	W11 W10 W9	325 12.8	1255 49.4	574 22.6	3746 147.5	124D 27A8	0.8	2370	1550	1270	1100	1030	1030
							12	5220	3410	2800	2420	2270	2270
							1.2	3040	1980	1620	1410	1320	1320
							17	6700	4360	3570	3110	2910	2910
							1.4	3340	2180	1780	1550	1450	1450
							20	7360	4800	3920	3410	3190	3190
							1.6	3680	2400	1970	1710	1600	1600
							23	8110	5290	4340	3770	3520	3520

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Constant Load					
		mm	mm					Static	10	20	30	40	50
		in	in					psi	6	12	19	25	31
320/85 R28	W11 W10 W9	325 12.8	1255 49.4	574 22.6	3746 147.5	124D 27A8	0.8	2370	1550	1270	1100	1030	1030
							12	5220	3410	2800	2420	2270	2270
							1.2	3040	1980	1620	1410	1320	1320
							17	6700	4360	3570	3110	2910	2910
							1.4	3340	2180	1780	1550	1450	1450
							20	7360	4800	3920	3410	3190	3190
							1.6	3680	2400	1970	1710	1600	1600
							23	8110	5290	4340	3770	3520	3520

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Constant Load					
		mm	mm					Static	10	20	30	40	50
		in	in					psi	6	12	19	25	31
340/85 R28	W12 W11	355 14.0	1289 50.7	592 23.3	3847 151.5	127D 30A8	0.8	2580	1680	1380	1200	1120	1120
							12	5680	3700	3040	2640	2470	2470
							1.2	3340	2180	1780	1550	1450	1450
							17	7360	4800	3920	3410	3190	3190
							1.4	3680	2400	1970	1710	1600	1600
							20	8110	5290	4340	3770	3520	3520
							1.6	4030	2630	2150	1870	1750	1750
							23	8880	5790	4740	4120	3850	3850

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Constant Load					
		mm	mm					Static	10	20	30	40	50
		in	in					psi	6	12	19	25	31
340/85 R28	W12 W11	355 14.0	1289 50.7	592 23.3	3847 151.5	127D 30A8	0.8	2580	1680	1380	1200	1120	1120
							12	5680	3700	3040	2640	2470	2470
							1.2	3340	2180	1780	1550	1450	1450
							17	7360	4800	3920	3410	3190	3190
							1.4	3680	2400	1970	1710	1600	1600
							20	8110	5290	4340	3770	3520	3520
							1.6	4030	2630	2150	1870	1750	1750
							23	8880	5790	4740	4120	3850	3850

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Constant Load					
		mm	mm					Static	10	20	30	40	50
		in	in					Static	6	12	19	25	31
360/70 R24	W11 W12 W10	360 14.2	1152 45.4	522 20.6	3420 134.6	122D 25A8	0.8	2190	1430	1170	1020	950	950
							12	4820	3150	2580	2250	2090	2090
							1.2	2880	1880	1540	1340	1250	1250
							17	6340	4140	3390	2950	2750	2750
							1.4	3130	2040	1670	1460	1360	1360
							20	6890	4490	3680	3220	3000	3000
							1.6	3450	2250	1850	1610	1500	1500
							23	7600	4960	4070	3550	3300	3300

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Constant Load					
		mm	mm					Static	10	20	30	40	50
		in	in					Static	6	12	19	25	31
360/70 R24	W11 W12 W10	360 14.2	1152 45.4	522 20.6	3420 134.6	122D 25A8	0.8	2190	1430	1170	1020	950	950
							12	4820	3150	2580	2250	2090	2090
							1.2	2880	1880	1540	1340	1250	1250
							17	6340	4140	3390	2950	2750	2750
							1.4	3130	2040	1670	1460	1360	1360
							20	6890	4490	3680	3220	3000	3000
							1.6	3450	2250	1850	1610	1500	1500
							23	7600	4960	4070	3550	3300	3300

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Constant Load					
		mm	mm					Static	10	20	30	40	50
		in	in					Static	6	12	19	25	31
380/70 R20	W12 W11 W13	380 15.0	1082 42.6	484 19.1	3229 127.1	122 A8/B	0.8	2190	1430	1170	1020	950	950
							12	4820	3150	2580	2250	2090	2090
							1.2	2880	1880	1540	1340	1250	1250
							17	6340	4140	3390	2950	2750	2750
							1.4	3130	2040	1670	1460	1360	1360
							20	6890	4490	3680	3220	3000	3000
							1.6	3450	2250	1850	1610	1500	1500
							23	7600	4960	4070	3550	3300	3300

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Constant Load					
		mm	mm					Static	10	20	30	40	50
		in	in					Static	6	12	19	25	31
380/70 R24	W12 W11 W13	380 15.0	1190 46.9	540 21.3	3514 138.3	125D 28A8	0.8	2370	1550	1270	1100	1030	1030
							12	5220	3410	2800	2420	2270	2270
							1.2	3130	2040	1670	1460	1360	1360
							17	6890	4490	3680	3220	3000	3000
							1.4	3450	2250	1850	1610	1500	1500
							20	7600	4960	4070	3550	3300	3300
							1.6	3800	2480	2030	1770	1650	1650
							23	8370	5460	4470	3900	3630	3630

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Constant Load					
		mm	mm					Static	10	20	30	40	50
		in	in					psi	6	12	19	25	31
380/70 R24	W12 W11 W13	380 15.0	1190 46.9	540 21.3	3514 138.3	125D 28A8	0.8	2370	1550	1270	1100	1030	1030
							12	5220	3410	2800	2420	2270	2270
							1.2	3130	2040	1670	1460	1360	1360
							17	6890	4490	3680	3220	3000	3000
							1.4	3450	2250	1850	1610	1500	1500
							20	7600	4960	4070	3550	3300	3300
							1.6	3800	2480	2030	1770	1650	1650
							23	8370	5460	4470	3900	3630	3630

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Constant Load					
		mm	mm					Static	10	20	30	40	50
		in	in					psi	6	12	19	25	31
420/70 R24	W13 W12 W14	430 16.9	1248 49.1	563 22.2	3683 145.0	130D 33A8	0.8	2790	1820	1490	1300	1215	1215
							12	6150	4010	3280	2860	2680	2680
							1.2	3570	2330	1910	1660	1550	1550
							17	7860	5130	4210	3660	3410	3410
							1.4	4030	2630	2150	1870	1750	1750
							20	8880	5790	4740	4120	3850	3850
							1.6	4370	2850	2340	2030	1900	1900
							23	9630	6280	5150	4470	4190	4190

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Constant Load					
		mm	mm					Static	10	20	30	40	50
		in	in					psi	6	12	19	25	31
420/70 R24	W13 W12 W14	430 16.9	1248 49.1	563 22.2	3683 145.0	130D 33A8	0.8	2790	1820	1490	1300	1215	1215
							12	6150	4010	3280	2860	2680	2680
							1.2	3570	2330	1910	1660	1550	1550
							17	7860	5130	4210	3660	3410	3410
							1.4	4030	2630	2150	1870	1750	1750
							20	8880	5790	4740	4120	3850	3850
							1.6	4370	2850	2340	2030	1900	1900
							23	9630	6280	5150	4470	4190	4190

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					Constant Load					
		mm	mm					Static	10	20	30	40	50
		in	in					psi	6	12	19	25	31
480/70 R30	W15L W14L W16L	479 18.9	1478 58.2	668 26.3	4411 173.7	141 A8/B	0.8	3800	2480	2030	1770	1650	1650
							12	8370	5460	4470	3900	3630	3630
							1.2	4880	3180	2610	2270	2120	2120
							17	10750	7000	5750	5000	4670	4670
							1.4	5430	3540	2900	2530	2360	2360
							20	11960	7800	6390	5570	5200	5200
							1.6	5920	3860	3170	2760	2575	2575
							23	13040	8500	6980	6080	5670	5670

FEATURES AND BENEFITS

Robust casing

Ensures high load
carrying capacity



Strong Bead
construction

Prevents rim
slippage



Higher no of lugs
with increased
lug surface area

better stability and
reduced vibration



Lower lug angle
at shoulder

Provide better
traction



ENERGYMAX



ENERGYMAX

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Constant Load						
		mm	mm				bar	Static	10	20	30	40	50	65
		in	in				psi	Static	6	12	19	25	31	40
200/70 R16	W6	197 7.8	686 27	316 12.4	2037 80.2	94D	0.8	740	480	390	370	350	340	320
							12	1630	1060	860	810	770	750	700
							1.2	940	620	500	470	450	430	410
							17	2070	1370	1100	1040	990	950	900
							1.4	1060	690	570	530	500	480	460
							20	2330	1520	1260	1170	1100	1060	1010
							1.8	1290	840	690	640	610	590	560
							26	2840	1850	1520	1410	1340	1300	1230
							2.4	1540	1010	820	770	730	700	670
							35	3390	2220	1810	1700	1610	1540	1480

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Constant Load						
		mm	mm				bar	Static	10	20	30	40	50	65
		in	in				psi	Static	6	12	19	25	31	40
200/70 R16	W6	197 7.8	686 27.0	316 12.4	2037 80.2	94D	0.8	740	480	390	370	350	340	320
							12	1630	1060	860	810	770	750	700
							1.2	940	620	500	470	450	430	410
							17	2070	1370	1100	1040	990	950	900
							1.4	1060	690	570	530	500	480	460
							20	2330	1520	1260	1170	1100	1060	1010
							1.8	1290	840	690	640	610	590	560
							26	2840	1850	1520	1410	1340	1300	1230
							2.4	1540	1010	820	770	730	700	670
							35	3390	2220	1810	1700	1610	1540	1480

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Constant Load						
		mm	mm				bar	Static	10	20	30	40	50	65
		in	in				psi	Static	6	12	19	25	31	40
200/70 R16	W6	197 7.8	686 27.0	316 12.4	2037 80.2	94D	0.8	740	480	390	370	350	340	320
							12	1630	1060	860	810	770	750	700
							1.2	940	620	500	470	450	430	410
							17	2070	1370	1100	1040	990	950	900
							1.4	1060	690	570	530	500	480	460
							20	2330	1520	1260	1170	1100	1060	1010
							1.8	1290	840	690	640	610	590	560
							26	2840	1850	1520	1410	1340	1300	1230
							2.4	1540	1010	820	770	730	700	670
							35	3390	2220	1810	1700	1610	1540	1480

BIAS TRACTOR



FEATURES AND BENEFITS

Triple angle lug

Enhanced traction
& roadability



High centre lug
overlap & tie bar

Improved stability



Reinforced carcass
Longer service life



FARMAX R1

TRA CODE : R-1



FARMAX R1

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
		SW	OD					Constant Load	
		mm	mm					30	40
		in	in	in	in	in	psi	19	25
20.8-38	DW18	530	1886	850	5750	10	1.5	3550	3150
		21	74	33	226	10	22	7828	6946

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
		SW	OD					Constant Load	
		mm	mm					30	40
		in	in	in	in	in	psi	19	25
20.8-38	W18	535	1840	830	5610	14	2.2	4375	3875
		21	72	33	221	14	32	9647	8544

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
		SW	OD					Constant Load	
		mm	mm					30	40
		in	in	in	in	in	psi	19	25
12.4-16	10LB	308	940	410	2790	4	1.7	920	825
		12	37	16	110	4	24	2029	1819

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
		SW	OD					Constant Load	
		mm	mm					30	40
		in	in	in	in	in	psi	19	25
7-12	5JA	183	620	288	1840	10	4.0	545	490
		7	24	11	72	10	58	1202	1080

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
		SW	OD					Constant Load	
		mm	mm					30	40
		in	in	in	in	in	psi	19	25
8-16	W6	211	775	349	2300	8	2.6	750	670
		8	31	14	91	8	38	1654	1477

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
		SW	OD					Constant Load	
		mm	mm					30	40
		in	in					19	25
9.5-16	W8	241 9	852 34	380 15	2530 100	12 12	3.4	1050	950
							49	2315	2095
							2.8	890	800
							41	1962	1764

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
		SW	OD					Constant Load	
		mm	mm					30	40
		in	in					19	25
14.9-30	W13	378 15	1415 56	602 24	4200 165	8 8	1.8	2220	2000
							26	4895	4410

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
		SW	OD					Constant Load	
		mm	mm					30	40
		in	in					19	25
9.5-20	W8X	241 9	945 37	425 17	2835 112	6 6	2.8	1080	975
							41	2381	2150

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
		SW	OD					Constant Load	
		mm	mm					40	
		in	in					25	
8.3-24	W7	209 8	994 39	465 18	2982 117	8 8	3.1	925	
							45	2040	

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
		SW	OD					Constant Load	
		mm	mm					40	
		in	in					25	
9.5-24	W8	241 9	1055 42	494 19	3165 125	8 8	2.8	1120	
							41	2470	

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
		SW	OD					Constant Load	
		mm	mm					40	
		in	in					25	
11.2-24	W10	292 11	1115 44	522 21	3345 132	8 8	2.4	1250	
							35	2756	

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
11.2-24	W10	292	1115	522	3345	8	2.4	1250
		11	44	21	132	8	35	2756

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
12.4-24	W11	307	1159	542	3477	8	2.3	1415
		12	46	21	137	8	33	3120

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
12.4-24	W11	307	1159	542	3477	10	3.0	1650
		12	46	21	137	10	44	3638

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
12.4-24/3	W11	307	1159	542	3477	12	3.5	1850
		12	46	21	137	12	51	4079

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
13.6-24	W12	345	1210	560	3555	8	1.9	1500
		14	48	22	140	8	28	3308

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
14.9-24	W13	398	1245	575	3660	6	1.8	1800
		16	49	23	144	6	26	3969

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
14.9-24	W13	398	1245	575	3660	8	2.6	2240
		16	49	23	144	8	38	4939

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
16.9-24	W15L	426	1330	622	3990	8	1.7	2040
		17	52	24	157	8	25	4498

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
18.4-24	W16	475	1375	612	4116	12	2.3	3000
		19	54	24	162	12	33	6615

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
11.2-28	W10	295	1205	589	3615	8	2.5	1320
		12	47	23	142	8	36	2911

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
12.4-28	W11	323	1258	589	3774	4	1.1	900
		13	50	23	149	4	16	1985

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
12.4-28	W11	323	1258	589	3774	8	2.4	1550
		13	50	23	149	8	35	3418

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
13.6-28	W12	318	1345	621	4035	12	2.0	1650
		13	53	24	159	12	29	3638

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
13.6-28	W12	343	1310	613	3930	12	3.0	2120
		14	52	24	155	12	44	4675

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
14.9-28	W13	386	1380	646	4140	12	1.8	2070
		15	54	25	163	12	26	4564

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
14.9-28	W13	386	1375	644	4125	12	2.6	2360
		15	54	25	162	12	38	5204

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
16.9-28	W15L	442	1450	679	4350	12	2.1	2180
		17	57	27	171	12	30	4807

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
16.9-28	W15L	440	1430	650	4233	14	2.4	2725
		17	56	26	167	14	35	6009

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
16.9-30	W15L	435	1500	673	4415	12	1.2	1700
		17	59	26	174	12	17	3749

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
16.9-30	W15L	435	1500	673	4415	14	1.7	2300
		17	59	26	174	14	25	5072

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
16.9-30/4	W15L	440	1495	700	4485	10	2.0	2455
		17	59	28	177	10	29	5413

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
16.9-30/4	W15L	440	1495	700	4485	12	2.5	2800
		17	59	28	177	12	36	6174

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
18.4-30	W16L	465	1564	732	4692	8	1.4	2430
		18	62	29	185	8	20	5358

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
18.4-30	W16L	465	1564	732	4692	12	2.3	3250
		18	62	29	185	12	33	7166

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
18.4-30/3	W16L	465	1564	732	4692	14	2.6	3450
		18	62	29	185	14	38	7607

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
18.4-34	W16L	465	1650	772	4950	8	1.4	2650
		18	65	30	195	8	20	5843

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
18.4-34	W16L	465	1650	772	4950	12	2.3	3450
		18	65	30	195	12	33	7607

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
18.4-34/3	W16L	465	1650	772	4950	10	1.8	3000
		18	65	30	195	10	26	6615

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
18.4-34/4	W16L	465	1650	772	4950	14	2.6	3650
		18	65	30	195	14	38	8048

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
18.4-34/5	W16L	465	1750	819	5250	8	1.4	2725
		18	69	32	207	8	20	6009

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
18.4-34/6	W16L	465	1750	819	5250	12	2.3	3550
		18	69	32	207	12	33	7828

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
13.6-36	W12	350	1535	718	4605	8	2.0	1855
		14	60	28	181	8	29	4090

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
13.6-38	W12	350	1585	742	4755	8	2.0	1950
		14	62	29	187	8	29	4300

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
15.5-38	W14L	395	1580	728	4725	10	1.8	2060
		16	62	29	186	10	26	4542

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
15.5-38	W14L	395	1580	728	4725	12	2.3	2300
		16	62	29	186	12	33	5072

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in	in	in	in	psi	25
15.5-38/3	W14	400	1577	738	4731	12	2.8	2575
		16	62	29	186	12	41	5678

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in	in	in	in	psi	25
16.9-38	W15L	429	1685	789	5055	8	1.7	2575
		17	66	31	199	8	25	5678

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in	in	in	in	psi	25
16.9-38	W15L	429	1685	789	5055	10	2.0	2725
		17	66	31	199	10	29	6009

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in	in	in	in	psi	25
16.9-38/3	W15L	429	1685	789	5055	12	2.3	3000
		17	66	31	199	12	33	6615

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in	in	in	in	psi	25
23.1-26	DW20	587	1605	738	4670	12	2.3	4375
		23	63	29	184	12	33	9647

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in	in	in	in	psi	25
12.4-34	W11	323	1514	708	4540	14	3.9	2180
		13	60	28	179	14	57	4807

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in	in	in	in	psi	25
16.9-34	W15L	435	1585	742	2430	8	1.7	2430
		17	62	29	96	8	25	5358

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
16.9-34	W15L	435	1585	742	2430	10	2.0	2650
		17	62	29	96	10	29	5843

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
16.9-34/3	W15L	435	1585	742	2430	14	2.8	3250
		17	62	29	96	14	41	7166

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
12.4-36	W11	325	1465	694	4545	12	3.5	2180
		13	58	27	179	12	51	4807

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
12.4-32	W11	323	1360	634	4040	8	2.3	1450
		13	54	25	159	8	33	3197

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
23.1-30	DW20B	587	1707	750	5120	12	1.7	3450
		23	67	30	202	12	25	7607

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
16.9-26	W15L	429	1384	627	4150	8	1.7	1900
		17	54	25	163	8	25	4190

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
14.9-26	W13	385	1310	613	3890	9	1.8	1650
		15	52	24	153	9	26	3638

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
14.9-26	W13	385	1310	613	3890	12	2.7	2000
		15	52	24	153	12	39	4410

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
9.50-22	W8	240	995	465	3010	8	2.7	950
		9	39	18	119	8	39	2095

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
6.50-16	4.50E	175	760	356	2280	6	2.7	490
		7	30	14	90	6	39	1080

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
6.50-16	4.50E	175	760	356	2280	6	2.7	490
		7	30	14	90	6	39	1080

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
6.50-16	4.50E	175	760	356	2280	6	2.7	490
		7	30	14	90	6	39	1080

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
7.50-16	5.50F	205	805	377	2415	8	2.2	570
		8	32	15	95	8	32	1257

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
7.50-16	5.50F	205	805	377	2415	8	2.2	570
		8	32	15	95	8	32	1257

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm	mm	mm	mm	bar	40
		in	in	in	in	in	psi	25
7.50-16	5.50F	205	805	377	2415	8	2.2	570
		8	32	15	95	8	32	1257

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm	mm	mm	mm	bar	40
		in	in	in	in	in	psi	25
8.25-16	6.00F	225	820	372	2452	6	2.0	670
		9	32	15	97	6	29	1477

FEATURES AND BENEFITS

Extra-deep tread,
with curved tread bars

Better self cleaning &
traction in wet soil



Flatter tread

Reduces soil
compaction



Dual step tie bar
Prevents mud
clogging while adding
traction & side hill
slip resistance



Stepped lug design

Good grip in wet
& moist soil



Bolstered nose
at tread center

Improved wear &
performance



Buttressed
bar base

Better
self cleaning



FARMAX R2

TRA CODE : R-2



FARMAX R2

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
		SW	OD					Constant Load	
		mm	mm					30	40
		in	in	in	in	in	psi	19	25
14.9-24/3	W13	380	1310	1310	3990	6	1.4	1550	1360
		15	52	52	157	6	20	3418	2999

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD					Constant Load		
		mm	mm					Static	30	40
		in	in	in	in	in	psi	Static	19	25
14.9-24	W13	398	1245	575	3660	6	1.4	2720	1550	1360
		16	49	23	144	6	20	5998	3418	2999

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD					Constant Load		
		mm	mm					Static	30	40
		in	in	in	in	in	psi	Static	19	25
14.9-24	W13	398	1245	575	3660	6	1.4	2720	1550	1360
		16	49	23	144	6	20	5998	3418	2999

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD					Constant Load		
		mm	mm					Static	30	40
		in	in	in	in	in	psi	Static	19	25
14.9-24	W13	398	1245	575	3660	8	1.8	3200	1800	1600
		16	49	23	144	8	26	7056	3969	3528

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD					Constant Load		
		mm	mm					Static	30	40
		in	in	in	in	in	psi	Static	19	25
14.9-24	W13	398	1245	575	3660	8	1.8	3200	1800	1600
		16	49	23	144	8	26	7056	3969	3528

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
		SW	OD					Constant Load	
		mm	mm					30	40
		in	in	in	in	in	psi	19	25
14.9-24	W13	398	1245	575	3660	8	1.4	3250	2900
		16	49	23	144	8	20	7166	6395

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
								Constant Load		
		SW	OD							
		mm	mm	mm	mm	mm	bar	Static	30	40
in	in	in	in	in	psi	Static	19	25		
23.1-26	DW20	587	1560	690	4545	12	1.4	5800	3250	2900
		23	61	27	179	12	20	12789	7166	6395

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
								Constant Load		
		SW	OD							
		mm	mm					mm	mm	mm
		in	in	in	in	in	psi	Static	19	25
23.1-26	DW20	587	1560	690	4545	16	1.9	7100	3940	3550
		23	61	27	179	16	28	15656	8688	7828

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Constant Load						
		mm	mm					mm	mm	mm	bar	Static	30	40
		in	in					in	in	in	psi	Static	19	25
23.1-26	DW20	587	1560	690	4545	16	1.9	7100	3940	3550				
		23	61	27	179	16	28	15656	8688	7828				

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
								Constant Load		
		SW	OD							
		mm	mm					mm	mm	mm
in	in	in	in	in	in	psi	Static	19	25	
23.1-26	DW20	587	1560	690	4545	16	1.9	7100	3940	3550
		23	61	27	179	16	28	15656	8688	7828

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
								Constant Load		
		SW	OD							
		mm	mm					mm	mm	mm
in	in	in	in	in	in	psi	Static	19	25	
23.1-26/3	DW20	587	1560	690	4545	18	2.3	7750	4375	3875
		23	61	27	179	18	33	17089	9647	8544

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
								Constant Load		
		SW	OD							
		mm	mm	mm	mm	mm	bar	Static	30	40
in	in	in	in	in	in	psi	Static	19	25	
23.1-26/3	DW20	587	1560	690	4545	18	2.3	7750	4375	3875
		23	61	27	179	18	33	17089	9647	8544

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Constant Load						
		mm	mm					mm	mm	mm	bar	Static	30	40
		in	in					in	in	in	psi	Static	19	25
23.1-26/3	DW20	587	1560	690	4545	18	2.3	7750	4375	3875				
		23	61	27	179	18	33	17089	9647	8544				

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
		SW	OD					Constant Load	
		mm	mm					30	40
		in	in	in	in	in	psi	19	25
14.9-28/5	W13	380	1406	630	4280	10	2.2	2120	1900
		15	55	25	169	10	32	4675	4190

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD					Constant Load		
		mm	mm				bar	Static	30	40
		in	in	in	in	in	psi	Static	19	25
14.9-28	W13	386	1380	646	4140	12	1.8	3400	1900	1700
		15	54	25	163	12	26	7497	4190	3749

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD					Constant Load		
		mm	mm				bar	Static	30	40
		in	in	in	in	in	psi	Static	19	25
14.9-28	W13	386	1380	646	4140	12	1.8	3400	1900	1700
		15	54	25	163	12	26	7497	4190	3749

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD					Constant Load		
		mm	mm				bar	Static	30	40
		in	in	in	in	in	psi	Static	19	25
14.9-28	W13	386	1375	644	4125	12	2.2	3800	2120	1900
		15	54	25	162	12	32	8379	4675	4190

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD					Constant Load		
		mm	mm				bar	Static	30	40
		in	in	in	in	in	psi	Static	19	25
14.9-28	W13	386	1375	644	4125	12	2.2	3800	2120	1900
		15	54	25	162	12	32	8379	4675	4190

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD					Constant Load		
		mm	mm				bar	Static	30	40
		in	in	in	in	in	psi	Static	19	25
14.9-28/3	W13	380	1406	630	4280	8	1.8	3400	1900	1700
		15	55	25	169	8	26	7497	4190	3749

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD					Constant Load		
		mm	mm				bar	Static	30	40
		in	in	in	in	in	psi	Static	19	25
14.9-28/4	W13	380	1406	630	4280	10	2.2	3800	2120	1900
		15	55	25	169	10	32	8379	4675	4190

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
		SW	OD					Constant Load	
		mm	mm					30	40
		in	in	in	in	in	psi	19	25
18.4-26	DW16	467	1498	700	4560	10	1.8	2650	2360
		18	59	28	180	10	26	5843	5204

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
		SW	OD					Constant Load	
		mm	mm					30	40
		in	in	in	in	in	psi	19	25
18.4-26	DW16	467	1498	700	4560	10	1.8	2650	2360
		18	59	28	180	10	26	5843	5204

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD					Constant Load		
		mm	mm				bar	Static	30	40
		in	in	in	in	in	psi	Static	19	25
18.4-26	W16L	467	1425	671	4275	12	1.8	4720	2650	2360
		18	56	26	168	12	26	10408	5843	5204

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD					Constant Load		
		mm	mm				bar	Static	30	40
		in	in	in	in	in	psi	Static	19	25
18.4-26	W16L	467	1425	671	4275	12	1.8	4720	2650	2360
		18	56	26	168	12	26	10408	5843	5204

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD					Constant Load		
		mm	mm				bar	30	40	
		in	in	in	in	in	psi	19	25	
23.1-30	DW20	590	1765	800	5380	10	1.8	3450	3075	
		23	69	31	212	10	26	7607	6780	

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD					Constant Load		
		mm	mm				bar	Static	30	40
		in	in	in	in	in	psi	Static	19	25
23.1-30	DW20	590	1765	800	5380	10	1.8	6150	3450	3075
		23	69	31	212	10	26	13561	7607	6780

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
		SW	OD					Constant Load	
		mm	mm				bar	30	40
		in	in	in	in	in	psi	19	25
20.8-38	DW18	530	1886	850	5750	10	1.5	3450	3150
		21	74	33	226	10	22	7607	6946

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
		SW	OD					Constant Load	
		mm	mm				bar	30	40
		in	in	in	in	in	psi	19	25
20.8-38	DW18	530	1886	850	5750	10	1.5	3450	3150
		21	74	33	226	10	22	7607	6946

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD					Constant Load		
		mm	mm				bar	Static	30	40
		in	in	in	in	in	psi	Static	19	25
20.8-38	W18	535	1840	830	5610	14	1.5	6300	3450	3150
		21	72	33	221	14	22	13892	7607	6946

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD					Constant Load		
		mm	mm				bar	Static	30	40
		in	in	in	in	in	psi	Static	19	25
20.8-38	W18	535	1840	830	5610	14	1.5	6300	3450	3150
		21	72	33	221	14	22	13892	7607	6946

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD					Constant Load		
		mm	mm				bar	Static	30	40
		in	in	in	in	in	psi	Static	19	25
20.8-38	W18	535	1840	830	5610	14	1.5	6300	3450	3150
		21	72	33	221	14	22	13892	7607	6946

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)										
								Speed,km/h(mph)										
		SW	OD					USED SINGLE			USED DUAL							
		mm	mm					mm	mm	mm	bar	Static	30	40	bar	Static	30	40
		in	in					in	in	in	psi	Static	19	25	psi	Static	19	25
13.6-24	W12	345	1210	560	3555	8	1.9	2800	1550	1400	1.9	2460	1360	1230				
		14	48	22	140	8	28	6174	3418	3087	28	5424	2999	2712				

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)										
								Speed,km/h(mph)										
		SW	OD					USED SINGLE			USED DUAL							
		mm	mm					mm	mm	mm	bar	Static	30	40	bar	Static	30	40
		in	in					in	in	in	psi	Static	19	25	psi	Static	19	25
13.6-24	W12	345	1210	560	3555	8	1.9	2800	1550	1400	1.9	2460	1360	1230				
		14	48	22	140	8	28	6174	3418	3087	28	5424	2999	2712				

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)										
								Speed,km/h(mph)										
		SW	OD					USED SINGLE			USED DUAL							
		mm	mm					mm	mm	mm	bar	Static	30	40	bar	Static	30	40
		in	in					in	in	in	psi	Static	19	25	psi	Static	19	25
15.5-38	W14L	394	1605	740	4890	8	1.8	3700	2050	1850	1.8	3260	1800	1630				
		16	63	29	193	8	26	8159	4520	4079	26	7188	3969	3594				

FEATURES AND BENEFITS



FARMAX F2

TRA CODE : F-2

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					
5.00-15	4.00E	140	655	307	1965	4	2.8	365
		6	26	12	77	4	41	805

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					
5.50-16	4.00E	150	710	332	2130	6	3.7	365
		6	28	13	84	6	54	805

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					
6.00-16	4.50E	165	735	344	2205	6	3.4	560
		6	29	14	87	6	49	1235

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm	mm	mm	mm	bar	30
		in	in	in	in	in	psi	19
6.50-16	4.50E	175	760	356	2280	6	3.1	615
		7	30	14	90	6	45	1356

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm	mm	mm	mm	bar	30
		in	in	in	in	in	psi	19
7.50-16	5.50F	205	805	377	2415	8	3.7	875
		8	32	15	95	8	54	1929

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm	mm	mm	mm	bar	30
		in	in	in	in	in	psi	19
10.00-16	W8	280	890	406	2640	8	2.8	1215
		11	35	16	104	8	41	2679

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm	mm	mm	mm	bar	30
		in	in	in	in	in	psi	19
10.00-16	W8	285	910	426	2730	12	3.4	1360
		11	36	17	107	12	49	2999

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm	mm	mm	mm	bar	30
		in	in	in	in	in	psi	19
11.00-16	W10	335	940	432	2820	12	2.5	1320
		13	37	17	111	12	36	2911

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm	mm	mm	mm	bar	30
		in	in	in	in	in	psi	19
11.00-16	W10	335	940	432	2820	12	2.5	1320
		13	37	17	111	12	36	2911

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm	mm	mm	mm	bar	30
		in	in	in	in	in	psi	19
7.50-18	5.50F	205	860	402	2580	8	3.7	950
		8	34	16	102	8	54	2095

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
								Constant Load
		SW	OD					
		mm	mm					mm
in	in	in	in	in	psi	19		
4.00-19	3.00D	112	712	112	2136	4	3.4	355
		4	28	4	84	4	49	783

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
								Constant Load
		SW	OD					
		mm	mm					mm
in	in	in	in	in	psi	19		
7.50-20	5.50F	205	914	428	2742	4	3.4	1030
		8	36	17	108	4	49	2271

FEATURES AND BENEFITS

Unique tread design
with grooves on the
central rib and notches
in the shoulder

Superior traction



Angular & open
shoulder blocks

Better self-cleaning

Longer life



Superior tread
compound

Resistance to chips
and tears

Excellent steering
ability



4-Rib pattern

Driving comfort
on and off road

FARMAX X3 TF

TRA CODE : F-2M



FARMAX X3 TF

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					30
7.50-20	5.50F	205	914	428	2742	8	3.4	1030
		8	36	17	108	8	49	2271

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					30
7.50-20	5.50F	205	914	428	2742	8	3.4	1030
		8	36	17	108	8	49	2271

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					30
6.50-16	4.50E	175	760	356	2280	6	4.2	750
		7	30	14	90	6	61	1654

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					30
6.50-16	4.50E	175	760	356	2280	6	4.2	750
		7	30	14	90	6	61	1654

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					30
6.50-20	5.00F	190	890	385	2670	8	4.5	850
		7	35	15	105	8	65	1874

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					30
7.50-16	5.50F	205	805	377	2415	8	3.7	875
		8	32	15	95	8	54	1929

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
								Constant Load
		SW	OD					
		mm	mm				mm	mm
in	in	in	in	in	in	psi	19	
7.50-16	5.50F	205	805	377	2415	8	3.7	875
		8	32	15	95	8	54	1929

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					30
		in	in					19
6.00-16	4.50E	165	735	344	2205	6	3.3	560
		6	29	14	87	6	48	1235

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					30
		in	in					19
6.00-16	4.50E	165	735	344	2205	6	3.3	560
		6	29	14	87	6	48	1235

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
								Constant Load				
		mm	mm					mm	mm	mm	bar	30
		in	in					in	in	in	psi	19
5.50-16	4.00E	150	710	332	2130	6	3.7	530				
		6	28	13	84	6	54	1169				

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					30
		in	in					19
5.50-16	4.00E	150	710	332	2130	6	3.7	530
		6	28	13	84	6	54	1169

FEATURES AND BENEFITS

Multi rib design
Easy steering



Cut-resistant
compound
Improved
tyre life



FARMAX F2M

TRA CODE : F-2M

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					
7.50-16	5.50F	205	805	377	2415	8	3.7	875
		8	32	15	95	8	54	1929

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					
10.00-16	W8	280	890	406	2640	8	3	1060
		11	35	16	104	8	44	2337

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					
11.00-16	W10	335	940	432	2820	8	2.8	1180
		13	37	17	111	8	41	2602

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					
11.00-16	W10	335	940	432	2820	8	2.8	1180
		13	37	17	111	8	41	2602

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					
11.00-16	W10	335	940	432	2820	12	4.2	1550
		13	37	17	111	12	61	3418

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					
9.5L-15	7	241	788	356	2312	8	3.3	850
		9	31	14	91	8	48	1874

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					
11L-15	8	280	788	381	2360	8	3	950
		11	31	15	93	8	44	2095

BIAS HARVESTER




FEATURES AND BENEFITS

Robust deep lugs
Superior haulage
on all terrains



Dual-angle lug design
Optimal traction for
peak performance



Tough nylon casing
Reliable stability,
puncture resistance

Advanced tyre compound
Extended tyre lifespan
Enhanced weather &
crack resistance



Open buttress
design
Improved
self-cleaning



FARMAX R1 HD

TRA CODE : R-1



FARMAX R1 HD

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
		SW	OD					Constant Load	
		mm	mm				bar	Static	40
		in	in				psi	Static	25
18.4-26	W16L	480	1470	693	4410	10	2.3	5600	2800
		19	58	27	174	10	33	12348	6174

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
		SW	OD					Constant Load	
		mm	mm				bar	Static	40
		in	in				psi	Static	25
18.4-38	W16L	465	1750	819	5250	12	2.9	7500	3750
		18	69	32	207	12	42	16538	8269

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
		SW	OD					Constant Load	
		mm	mm				bar	Static	40
		in	in				psi	Static	25
23.1-26	DW20	587	1605	738	4670	12	2.2	7750	3875
		23	63	29	184	12	32	17089	8544

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
		SW	OD					Constant Load	
		mm	mm				bar	Static	40
		in	in				psi	Static	25
23.1-26	DW20	587	1605	738	4670	12	2.2	7750	3875
		23	63	29	184	12	32	17089	8544

FEATURES AND BENEFITS

Stepped
sidewall design

Improved performance
on slopes



Special tread
compound

For longer life

Tie bar at the center

Strengthened lug base
for better stability



Buttressed
bar base

Better
self-cleaning



23° Tread Bars

Best in class traction



Stronger carcass

To carry
heavier loads



YIELDMAX 23°

TRA CODE : R-1



YIELDMAX 23°

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
								Constant Load		
		SW	OD				bar	Static	30	40
		mm	mm	mm	mm	mm	psi	Static	19	25
24.5-32	DW21B	625	1825	830	5560	12	1.7	8000	4375	4000
		25	72	33	219	12	25	17640	9647	8820

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
								Constant Load		
		mm	mm	mm	mm	mm	bar	Static	30	40
		in	in	in	in	in	psi	Static	19	25
24.5-32	DW21B	622	1803	820	5490	10	1.4	7100	3875	3550
		24	71	32	216	10	20	15656	8544	7828

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
								Constant Load		
		SW	OD				bar	Static	30	40
		mm	mm	mm	mm	mm	psi	Static	19	25
24.5-32/3	DW21B	622	1803	820	5490	12	1.7	8000	4375	4000
		24	71	32	216	12	25	17640	9647	8820

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
								Constant Load		
		SW	OD				bar	Static	30	40
		mm	mm	mm	mm	mm	psi	Static	19	25
30.5L-32	DW21B	775	1819	820	5540	12	1.4	8500	4750	4250
		31	72	32	218	12	20	18743	10474	9371

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
								Constant Load		
		mm	mm	mm	mm	mm	bar	Static	30	40
		in	in	in	in	in	psi	Static	19	25
30.5L-32	DW27A	785	1825	830	5560	14	1.5	9000	5000	4500
		31	72	33	219	14	22	19845	11025	9923

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
								Constant Load		
		mm	mm	mm	mm	mm	bar	Static	30	40
		in	in	in	in	in	psi	Static	19	25
28L-26	DW25A	730	1630	750	4970	12	1.4	6700	3720	3350
		29	64	30	196	12	20	14774	8203	7387

BIAS IMPLEMENT



FEATURES AND BENEFITS

Robust
lug design
High traction
and long life



Superior
tread compound
Resistance to
chips and tears



FARMAX AS

TRA CODE : R-1

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					
6.5/80-12	5J	170	586	271	1740	6	3.6	650
		7	23	11	69	6	52	1433

FEATURES AND BENEFITS

Non directional
tread pattern

Prevents skidding
while turning



Lugs are open &
angled at the shoulder

Ensures maximum
stability



Larger footprint

Designed for
agricultural use

FARM IMPLEMENT AWI 305

TRA CODE : I-1

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
		SW	OD					Speed,km/h(mph)	
		mm	mm					Constant Load	
		in	in					Static	40
12.5/80-18	9	318	980	435	2842	18	5.5	6900	3450
		13	39	17	112	18	80	15215	7607

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
		SW	OD					Speed,km/h(mph)	
		mm	mm					Constant Load	
		in	in					40	25
12.5/80-18	11	310	970	435	2842	14	4.3	2900	
		12	38	17	112	14	62	6395	

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
								Constant Load
		SW	OD					
		mm	mm					mm
		in	in	in	in	in	bar	40
		in	in	in	in	in	psi	25
12.5/80-18/3	11	310	970	435	2842	16	4.9	3150
		12	38	17	112	16	71	6946

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					Constant Load				
		mm	mm					mm	mm	mm	bar	40
		in	in					in	in	in	psi	25
12.5/80-18/4	11	310	970	435	2842	16	3.7	2650				
		12	38	17	112	16	54	5843				

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					Constant Load				
		mm	mm					mm	mm	bar	Static	40
		in	in					in	in	in	psi	Static
10.0/75- 15.3	9	264	770	347	2272	18	7.1	4360	2180			
		10	30	14	89	18	103	9614	4807			

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
10.0/75-15.3	9	264	770	347	2272	12	4.7	1700
		10	30	14	89	12	68	3749

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
10.0/75-15.3/3	9	264	770	347	2272	14	5.5	1900
		10	30	14	89	14	80	4190

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
		SW	OD					Speed,km/h(mph)	
								Constant Load	
								40	
								25	
10.0/75-15.3/4	9	264	770	347	2272	10	3.9	1550	
		10	30	14	89	10	57	3418	

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
13.0/55-16	11	336	775	348	2260	12	3.6	1900
		13	31	14	89	12	52	4190

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm	mm	mm	mm	bar	40
		in	in	in	in	in	psi	25
13.0/55-16	11	336	775	348	2260	14	4.2	2060
		13	31	14	89	14	61	4542

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm	mm	mm	mm	bar	40
		in	in	in	in	in	psi	25
11.5/80-15.3	9	297	855	376	2485	12	4.1	2180
		12	34	15	98	12	59	4807

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm	mm	mm	mm	bar	40
		in	in	in	in	in	psi	25
11.5/80-15.3	9	297	855	376	2485	14	4.8	2430
		12	34	15	98	14	69	5358

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm	mm	mm	mm	bar	40
		in	in	in	in	in	psi	25
11.5/80-15.3/3	9	297	855	376	2485	16	5.4	2575
		12	34	15	98	16	78	5678

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm	mm	mm	mm	bar	40
		in	in	in	in	in	psi	25
11.5/80-15.3/4	9	297	855	376	2485	10	4.8	1950
		12	34	15	98	10	69	4300

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm	mm	mm	mm	bar	40
		in	in	in	in	in	psi	25
7.00-12	4.25	185	665	295	1948	6	2.5	690
		7	26	12	77	6	36	1521

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm	mm	mm	mm	bar	40
		in	in	in	in	in	psi	25
12.5/80-15.3	9	312	885	387	2593	12	4.3	2500
		12	35	15	102	12	62	5513

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
								Constant Load
		SW	OD					
		mm	mm					mm
		in	in	in	in	in	bar	40
		in	in	in	in	in	psi	25
13.0/65-18	11	336	890	398	2610	16	4.9	2800
		13	35	16	103	16	71	6174

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
								Constant Load
		SW	OD					
		mm	mm					mm
		in	in	in	in	in	bar	40
		in	in	in	in	in	psi	25
10.0/80-12	9	264	710	320	2148	8	3.1	1250
		10	28	13	85	8	45	2756

FEATURES AND BENEFITS



FARM IMPLEMENT 404

TRA CODE : I-1

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					
15.0/55-17	13	391	850	375	2492	10	2.6	2120
		15	33	15	98	10	38	4675

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					
15.0/55-17	13	391	850	375	2492	14	3.7	2575
		15	33	15	98	14	54	5678

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
15.0/55-17/3	13	391	850	375	2492	18	4.7	3000
		15	33	15	98	18	68	6615

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
500/50-17	16.00DC	500	945	415	2752	10	2.0	2725
		20	37	16	108	10	29	6009

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
500/50-17	16.00DC	500	945	415	2752	14	2.8	3550
		20	37	16	108	14	41	7828

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
500/50-17/3	16.00DC	500	945	415	2752	18	3.6	3750
		20	37	16	108	18	52	8269

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
500/50-17/3	16.00DC	500	945	415	2752	18	3.6	3750
		20	37	16	108	18	52	8269

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
14.0/65-16	11	355	875	390	2552	10	2.8	2120
		14	34	15	100	10	41	4675

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
14.0/65-16	11	355	875	390	2552	14	4.0	2650
		14	34	15	100	14	58	5843

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
14.0/65-16	11	355	875	390	2552	14	4.0	2650
		14	34	15	100	14	58	5843

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
15.0/70-18	13	405	1010	450	3000	16	4.3	3450
		16	40	18	118	16	62	7607

FEATURES AND BENEFITS



FARM IMPLEMENT I-1

TRA CODE : I-1

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Constant Load						
		mm	mm					mm	mm	mm	bar	Static	15	50
		in	in					in	in	in	psi	Static	9	31
9.5L-14	7	241	745	745	2168	8	3.6	2180	1254	1090				
		9	29	29	85	8	52	4807	2765	2403				

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Constant Load						
		mm	mm					mm	mm	mm	bar	Static	15	50
		in	in					in	in	in	psi	Static	9	31
7.60-15	5.5	193	734	344	2202	8	3.6	1900	1095	950				
		8	29	14	87	8	52	4190	2414	2095				

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Constant Load						
		mm	mm					mm	mm	mm	bar	Static	15	50
		in	in					in	in	in	psi	Static	9	31
7.60-15	5.5	193 8	734 29	344 14	2202 87	10 10	4.3	2100	1203	1050				
							62	4631	2653	2315				

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		Constant Load								
		SW	OD							
		mm	mm					mm	mm	mm
in	in	in	in	in	in	psi	Static	9	31	
9.5L-15	7	241 9	767 30	341 13	2247 88	8 8	3.0	2240	1290	1120
							44	4939	2844	2470

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
		SW	OD					Constant Load						
		mm	mm					mm	mm	mm	bar	Static	15	50
		in	in					in	in	in	psi	Static	9	31
9.5L-15	7	241 9	767 30	341 13	2247 88	12 12	4.4	2900	1670	1450				
							64	6395	3682	3197				

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
								Constant Load		
		SW	OD					Static	15	50
		mm	mm	mm	mm	mm	bar	Static		
in	in	in	in	in	psi	Static	9	31		
11L-15	8 LB	279	777	345	2331	8	2.5	2300	1325	1150
		11	31	14	92	8	36	5072	2922	2536

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
								Constant Load		
		SW	OD				bar	Static	15	50
		mm	mm	mm	mm	mm	psi	Static	9	31
in	in	in	in	in	in	psi	Static	9	31	
11L-15	8 LB	279	777	345	2331	12	3.6	2900	1670	1450
		11	31	14	92	12	52	6395	3682	3197

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
								Constant Load		
		SW	OD					Static	15	50
		mm	mm	mm	mm	mm	bar	Static	9	31
in	in	in	in	in	psi	Static	9	31		
12.5-15	10 LB	318	823	363	2411	10	3.0	3100	1780	1550
		13	32	14	95	10	44	6836	3925	3418

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		Constant Load								
		SW	OD					Static	15	50
		mm	mm	mm	mm	mm	bar	Static	9	31
		in	in	in	in	in	psi	Static	9	31
12.5-15	10 LB	318	823	363	2411	12	3.6	3500	2015	1750
		13	32	14	95	12	52	7718	4443	3859

FEATURES AND BENEFITS



FARM IMPLEMENT LP

TRA CODE : I-1

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD	Constant Load						
		mm	mm	mm	mm	mm	bar	Static	15	50
		in	in	in	in	in	psi	Static	9	31
16.5L-16.1	W14C	419	1024	453	3070	10	2.5	4720	2800	2360
		16	40	18	121	10	36	10408	6174	5204

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD	Constant Load						
		mm	mm	mm	mm	mm	bar	Static	15	50
		in	in	in	in	in	psi	Static	9	31
16.5L-16.1	W14C	419	1024	1024	3070	14	3.3	5800	3250	2900
		16	40	40	121	14	48	12789	7166	6395

FEATURES AND BENEFITS



HIGHWAY IMPLEMENT T422

Size	RIM	Inflated Tire Dimension		SLR	RC	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD				Speed,km/h(mph)
		mm	mm				Constant Load
		in	in				
12.5L-15	10LB	315	820	420	2500	6.2	2120
		12	32	17	98	90	4675

Size	RIM	Inflated Tire Dimension		SLR	RC	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD				Speed,km/h(mph)
		mm	mm				Constant Load
		in	in				
11L-15FI	8LB	267	780	410	2380	6.2	1800
		11	31	16	94	90	3969

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm	mm	mm	mm	bar	40
		in	in	in	in	in	psi	25
9.5L-15	7	241	788	356	2312	8	4.2	1215
		9	31	14	91	8	60	2679

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm	mm	mm	mm	bar	40
		in	in	in	in	in	psi	25
9.5L-15	7	241	788	356	2312	8	4.2	1215
		9	31	14	91	8	60	2679

BIAS FLOTATION



FEATURES AND BENEFITS

Rounded shoulder
Reduced damage
to crops



Larger volume
& footprint
Reduced
compaction

FLOTATION PLUS

TRA CODE : I-3

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					
480/45-17	16.00DC	490	866	405	2598	10	2.3	2360
		19	34	16	102	10	33	5204

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					
480/45-17	16.00DC	490 19	866 34	405 16	2598 102	14 14	2.8/1	2800
							41/1	6174
							2.8/2	1950
							41/2	4300

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					
480/45-17/3	16.00DC	490 19	866 34	405 16	2598 102	16 16	3.2/1	3000
							46/1	6615
							3.2/2	2120
							46/2	4675

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
480/45-17/4	16.00DC	490 19	866 34	405 16	2598 102	18 18	3.3/1	3150
							48/1	6946
							3.3/2	2240
							48/2	4939

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
500/50-17	16.00DC	500 20	950 37	445 18	2850 112	14 14	2.8/1	3250
							41/1	7166
							2.8/2	2240
							41/2	4939

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
500/50-17	16.00DC	500 20	950 37	445 18	2850 112	14 14	2.8/1	3250
							41/1	7166
							2.8/2	2240
							41/2	4939

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
700/50-22.5	AG24.00	705 28	1270 50	572 23	xxx xxx	xx xx	xxxxx	xxxxx
							xxxxx	xxxxx

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
560/60-22.5	AG16.00	555 22	1240 49	560 22	xxx xxx	xx xx	xxxxx	xxxxx
							xxxxx	xxxxx

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
600/55-22.5	AG20.00	605 24	1240 49	560 22	xxx xxx	xx xx	xxxxx	xxxxx
							xxxxx	xxxxx

FEATURES AND BENEFITS

Tough nylon casing,
Strong bead bundle

Improved performance
on slopes

Larger volume
& footprint
Reduced
compaction



Rounded
shoulder

Reduced damage
to crops

FLOTATION T422

TRA CODE : I-3



FLOTATION T422

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
		SW	OD					Speed,km/h(mph)	
		mm	mm					Constant Load	
		in	in					40	
550/45-22.5	16.00DC	550 22	1070 42	470 19	3205 126	12 12	2.1/1	3650	
							30/1	8048	
							2.1/2	2575	
							30/2	5678	

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
		SW	OD					Speed,km/h(mph)	
		mm	mm					Constant Load	
		in	in					40	
550/45-22.5	16.00DC	550 22	1070 42	470 19	3205 126	16 16	2.8/1	4375	
							41/1	9647	
							2.8/2	3075	
							41/2	6780	

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
		SW	OD					Speed,km/h(mph)	
		mm	mm					Constant Load	
		in	in					40	
600/55-22.5	AG20.00	605 24	1240 49	560 22	xxx xxx	xx xx	xxxxx	xxxxx	
							xxxxx	xxxxx	

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
		SW	OD					Speed,km/h(mph)	
		mm	mm					Constant Load	
		in	in					40/1	40/2
550/45-22.5	16.00DC	500 20	1170 46	510 20	3380 133	12 12	2.4	4125	2900
							35	9096	6395
							3.2	4875	3450
							46	10749	7607

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
		SW	OD					Speed,km/h(mph)	
		mm	mm					Constant Load	
		in	in					40/1	40/2
500/60-22.5	16.00DC	550 22	1238 49	540 21	3720 146	12 12	2.3	4500	3150
							33	9923	6946
							3.0	5600	3875
							44	12348	8544

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					40
600/50-22.5	20.00DC	600 24	1170 46	510 20	3498 138	12 12	2/1	4375
							29/1	9647
							2.6/1	5150
							38/1	11356

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					40
600/50-22.5	20.00DC	600 24	1170 46	510 20	3498 138	16 16	2/2	3075
							29/2	6780
							2.6/2	3650
							38/2	8048

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					40
600/55-22.5	20.00DC	600 24	1238 49	540 21	3715 146	12 12	2/1	5000
							29/1	11025
							2.6/1	5800
							38/1	12789

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					40
600/55-22.5	20.00DC	600 24	1238 49	540 21	3715 146	16 16	2/2	3450
							29/2	7607
							2.6/2	4000
							38/2	8820

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					40
600/55-26.5	20.00DC	600 24	1333 52	585 23	3986 157	12 12	2.0	5150
							29	11356
							2.6	6000
							38	13230

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					40
600/55-26.5	20.00DC	600 24	1333 52	585 23	3986 157	16 16	2.0	3650
							29	8048
							2.6	4375
							38	9647

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
700/40-22.5	24.00DC	700 28	1170 46	510 20	3522 139	12 12	2.0	4500
							29	9923
							2.6	5300
							38	11687

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
700/40-22.5	24.00DC	700 28	1170 46	510 20	3522 139	16 16	2.0	3150
							29	6946
							2.6	3785
							38	8346

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
700/50-22.5	24.00DC	700 28	1245 49	550 22	3710 146	12 12	2.2	5600
							32	12348
							2.8	6700
							41	14774

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
700/50-22.5	24.00DC	700 28	1245 49	550 22	3710 146	16 16	2.2	4000
							32	8820
							2.8	4750
							41	10474

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
700/50-26.5	24.00DC	700 28	1333 52	585 23	3986 157	12 12	1.8	5800
							26	12789
							2.4	6700
							35	14774

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					40
		in	in					25
700/50-26.5	24.00DC	700 28	1333 52	585 23	3986 157	16 16	1.8	4125
							26	9096
							2.4	4750
							35	10474

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
								Constant Load
		mm	mm	mm	mm	mm	bar	40
		in	in	in	in	in	psi	25
800/45-26.5	16.00DC	800 31	1343 53	585 23	4016 158	12 12	1.7	6000
							25	13230
							2.2	7300
							32	16097

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load, kg (lbs)
		SW	OD					Speed,km/h(mph)
								Constant Load
		mm	mm	mm	mm	mm	bar	40
		in	in	in	in	in	psi	25
800/45-26.5	16.00DC	800 31	1343 53	585 23	4016 158	16 16	1.7	4250
							25	9371
							2.2	5000
							32	11025

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load, kg (lbs)
								Speed,km/h(mph)
								Constant Load
		SW	OD				bar	40
		mm	mm	mm	mm	mm	psi	25
400/55-17.5	AG11.75	375	887	420	xxx	xx	xxxxx	xxxxxx
		15	35	17	xxx	xx	xxxxxx	xxxxxx

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load, kg (lbs)
		SW	OD					Speed,km/h(mph)
								Constant Load
		mm	mm	mm	mm	mm	bar	40
		in	in	in	in	in	psi	25
400/55-22.5	13.00DC	375	1060	494	xxx	xx	xxxxx	xxxxx
		15	42	19	xxx	xx	xxxxx	xxxxx

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load, kg (lbs)
								Speed,km/h(mph)
								Constant Load
		mm	mm	mm	mm	mm	bar	40
		in	in	in	in	in	psi	25
400/60-15.5	13	876	400	385	xxx	xx	XXXXX	XXXXX
		34	16	15	xxx	xx	XXXXX	XXXXX

FEATURES AND BENEFITS

Larger volume
& footprint

Reduced
compaction



Rounded shoulder
Reduced damage
to crops

T422 VALUE PRO

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load, kg (lbs)
		SW	OD					Speed, km/h (mph)
		mm	mm					Constant Load
		in	in					
400/60-15.5	13	400 16	876 34	385 15	2575 101	14 14	4.4/1	3150
							64/1	6946
							4.4/2	2240
							64/2	4939

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load, kg (lbs)
		SW	OD					Speed, km/h (mph)
		mm	mm					Constant Load
		in	in					
400/60-15.5	13	400 16	876 34	385 15	2575 101	14 14	4.4/1	3150
							64/1	6946
							4.4/2	2240
							64/2	4939

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load, kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm	mm	mm	mm	bar	40
		in	in	in	in	in	psi	25
400/60-15.5	13	400 16	876 34	385 15	2575 101	18 18	5/1	3550
							73/1	7828
							5/2	2500
							73/2	5513

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load, kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm	mm	mm	mm	bar	40
		in	in	in	in	in	psi	25
400/60-15.5	13	400 16	876 34	385 15	2575 101	18 18	5/1	3550
							73/1	7828
							5/2	2500
							73/2	5513

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load, kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm	mm	mm	mm	bar	40
		in	in	in	in	in	psi	25
500/45-22.5	14	1045 41	500 20	470 19	3165 125	12 12	2.7/1	3150
							39/1	6946
							2.7/2	2240
							39/2	4939

FEATURES AND BENEFITS

Larger volume & footprint

Reduced compaction



Rounded shoulder

Reduced damage to crops



FLOTATION TX440

TRA CODE : I-3

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)												
								Speed,km/h(mph)												
		Free Wheel						Drive Wheel												
		mm	mm					mm	mm	mm	bar	10	25	40	50	bar	10	25	40	50
		in	in					in	in	in	psi	10	25	40	50	psi	10	25	40	50
500/ 60-22.5	16.00 DC	500 20	1170 46	510 20	3385 133	16 16	2.8	6310	5370	4510	4010	2.8	4470	3800	3190	2870				
							41	13914	11841	9945	8842	41	9856	9856~	8379	8379~				
							7034	7034~	6328	6328~	3	6570	5580	4690	4220	3				
							4650	3950	3320	2990	44	14487	12304	10341	9305	44				
							10253	10253~	8710	8710~	7321	7321~	6593	6593~	3.2	6830				
							5800	4875	4390	3.2	4830	4110	3450	3110	46	15060				
							12789	10749	9680	46	10650	10650~	9063	9063~	7607	7607~				

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)												
								Speed,km/h(mph)												
		SW	OD					Free Wheel				Drive Wheel								
		mm	mm					mm	mm	mm	bar	10	25	40	50	bar	10	25	40	50
		in	in					in	in	in	psi	10	25	40	50	psi	10	25	40	50
550/ 60-22.5	16.00 DC	550 22	1244 49	541 21	3597 142	16 16	2.4	6780	5770	4840	4360	2.4	4800	4080	3430	3090				
							35	14950	12723	10672	9614	35	10584	10584~	8996	8996~				
							7563	7563~	6813	6813~	2.6	7110	6040	5080	4570	2.6				
							4270	3590	3230	4770	38	15678	13318	11201	10077	38				
							9415	9415~	7916	7916~	7122	7122~	10518	10518~	2.8	7420				
							6310	5300	4770	2.8	5250	4460	3750	3380	41	16361				
							13914	11687	10518	41	11576	11576~	9834	9834~	8269	8269~				

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)												
								Speed,km/h(mph)												
		SW	OD					Free Wheel				Drive Wheel								
		mm	mm					mm	mm	mm	bar	10	25	40	50	bar	10	25	40	50
		in	in					in	in	in	psi	10	25	40	50	psi	10	25	40	50
600/ 50-22.5	20.00 DC	600 24	1170 46	510 20	3498 138	12 12	2.2	6540	5560	4670	4200	2.2	4630	3940	3310	2980				
							32	14421	12260	10297	9261	32	10209	10209~	8688	8688~				
							7299	7299~	6571	6571~	2.4	6870	5840	4910	4420	2.4				
							4870	4140	3480	3130	35	15148	12877	10827	9746	35				
							10738	10738~	9129	9129~	7673	7673~	6902	6902~	2.6	7210				
							6130	5150	4640	2.6	5110	4340	3650	3290	38	15898				
							13517	11356	10231	38	11268	11268~	9570	9570~	8048	8048~				

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)												
								Speed,km/h(mph)												
		SW	OD					Free Wheel				Drive Wheel								
		mm	mm					mm	mm	mm	bar	10	25	40	50	bar	10	25	40	50
		in	in					in	in	in	psi	10	25	40	50	psi	10	25	40	50
600/ 50-22.5	20.00 DC	600 24	1170 46	510 20	3498 138	12 12	2.2	6540	5560	4670	4200	2.2	4630	3940	3310	2980				
							32	14421	12260	10297	9261	32	10209	10209~	8688	8688~				
							7299	7299~	6571	6571~	2.4	6870	5840	4910	4420	2.4				
							4870	4140	3480	3130	35	15148	12877	10827	9746	35				
							10738	10738~	9129	9129~	7673	7673~	6902	6902~	2.6	7210				
							6130	5150	4640	2.6	5110	4340	3650	3290	38	15898				
							13517	11356	10231	38	11268	11268~	9570	9570~	8048	8048~				

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)												
								Speed,km/h(mph)												
		SW	OD					Free Wheel				Drive Wheel								
		mm	mm					mm	mm	mm	bar	Static	10	15	20	25	30	35	40	50
		in	in					in	in	in	psi	Static	6	9	12	16	19	22	25	31
600/ 50-22.5	20.00 DC	600	1170	510	3498	16	6.0	9900	9300	7980	7560	7140	6720	6300	6000	5400				
		24	46	20	138	16	87	21830	20507	17596	16670	15744	14818	13892	13230	11907				

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)												
								Speed,km/h(mph)												
		SW	OD					Free Wheel				Drive Wheel								
		mm	mm					mm	mm	mm	bar	Static	10	15	20	25	30	35	40	50
		in	in					in	in	in	psi	Static	6	9	12	16	19	22	25	31
600/ 50-22.5	20.00	600	1170	510	3498	16	6.0	9900	9300	7980	7560	7140	6720	6300	6000	5400				
	DC	24	46	20	138	16	87	21830	20507	17596	16670	15744	14818	13892	13230	11907				

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)												
								Speed,km/h(mph)												
		SW	OD					Free Wheel				Drive Wheel								
		mm	mm					mm	mm	mm	bar	10	25	40	50	bar	10	25	40	50
		in	in					in	in	in	psi	10	25	40	50	psi	10	25	40	50
700/ 40-22.5	24.00 DC	700 28	1170 46	510 20	3522 139	12 12	1.8	6590	5600	4710	4240	1.8	4660	3960	3330	3000				
							26	14531	12348	10386	9349	26	10275	10275~	8732	8732~				
							7343	7343~	6615	6615~	2.0	7010	5960	5010	4510	2.0				
							4970	4220	3550	3200	29	15457	13142	11047	9945	29				
							10959	10959~	9305	9305~	7828	7828~	7056	7056~	2.2	7420				
							6310	5300	4770	2.2	5250	4460	3750	3380	32	16361				
							13914	11687	10518	32	11576	11576~	9834	9834~	8269	8269~				

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)												
								Speed,km/h(mph)												
		SW	OD					Free Wheel				Drive Wheel								
		mm	mm					mm	mm	mm	bar	10	25	40	50	bar	10	25	40	50
		in	in					in	in	in	psi	10	25	40	50	psi	10	25	40	50
700/ 40-22.5	24.00 DC	700 28	1170 46	510 20	3522 139	12 12	1.8	6590	5600	4710	4240	1.8	4660	3960	3330	3000				
							26	14531	12348	10386	9349	26	10275	10275~	8732	8732~				
							7343	7343~	6615	6615~	2.0	7010	5960	5010	4510	2.0				
							4970	4220	3550	3200	29	15457	13142	11047	9945	29				
							10959	10959~	9305	9305~	7828	7828~	7056	7056~	2.2	7420				
							6310	5300	4770	2.2	5250	4460	3750	3380	32	16361				
							13914	11687	10518	32	11576	11576~	9834	9834~	8269	8269~				

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)												
								Speed,km/h(mph)												
		SW	OD					Free Wheel				Drive Wheel								
		mm	mm					mm	mm	mm	bar	Static	10	15	20	25	30	35	40	50
		in	in					in	in	in	psi	Static	6	9	12	16	19	22	25	31
700/ 40-22.5	24.00 DC	700	1170	510	3522	16	6.0	10730	10080	8650	8190	7740	7300	6900	6500	5850				
		28	46	20	139	16	87	23660	22226	19073	18059	17067	16097	15215	14333	12899				

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)												
								Speed,km/h(mph)												
		SW	OD					Free Wheel				Drive Wheel								
		mm	mm					mm	mm	mm	bar	Static	10	15	20	25	30	35	40	50
		in	in					in	in	in	psi	Static	6	9	12	16	19	22	25	31
700/ 40-22.5	24.00 DC	700	1170	510	3522	16	6.0	10730	10080	8650	8190	7740	7300	6900	6500	5850				
		28	46	20	139	16	87	23660	22226	19073	18059	17067	16097	15215	14333	12899				

FEATURES AND BENEFITS

Rounded shoulder
Reduced damage
to crops



Larger volume
& footprint
Reduced
compaction

TR800

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)			
								Speed,km/h(mph)			
		SW	OD					Constant Load		Cyclic Operation	
		mm	mm					mm	mm	mm	bar
		in	in	in	in	in	psi	25	psi	25	
400/ 60-15.5	13	400	876	385	2575	14	3.6	2900	4.5	2000	
		16	34	15	101	14	52	6395	65	4410	

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)			
		Speed,km/h(mph)									
		Constant Load						Cyclic Operation			
		SW	OD	mm	mm	mm	mm	bar	40	bar	40
		mm	mm	mm	mm	mm	bar	40	bar	40	
		in	in	in	in	in	psi	25	psi	25	
400/ 60-15.5	13	400	876	385	2575	18	4.5	3250	4.5	2300	
		16	34	15	101	18	65	7166	65	5072	

IRROGATOR



FEATURES AND BENEFITS

Strong nylon casing
Excellent stability &
increased service life



Optimised lug angle
with lug overlap
Uniform wear

IRROGATOR

TRA CODE : R-1

Size	TRA Code	Rim	Flange Height In	Tyre Type	Inflated tire dimension		SLR	RC	Load Index	Ply Rating	Inflation pressure	Recommended load, kg (lbs)
					SW	OD						Speed, km/h (mph)
												Agri
												mm
in	in	in	in	Symbol	psi	19.0						
11.2-24	R-1	W10		TT	284	1105	517	3315	101	4 PR	1.2	825
					11	44	20	131	A6		17	1820
11.2-24	R-1	W10		TL	284	1105	517	3315	110	6 PR	1.8	1060
					11	44	20	131	A6		26	2332
14.9-24	R-1	W13		TT	398	1245	575	3660	123	8 PR	1.4	1550
					16	49	23	144	A6		20	3410
11.2-38	R-1	W10		TT / TL	284	1445	685	4250	117	6 PR	1.8	1285
					11	57	27	167	A6		26	2830

Size	TRA Code	Rim	“Flange Height In”	Tyre Type	Inflated tire dimension		SLR	RC	Load Index	Ply Rating	Inflation pressure	Recommended load, kg (lbs)
					SW	OD						Speed, km/h (mph)
												Agri
											40	
											in	in
14.9-24	R-1	W13		TL	398	1245	575	3660	119 A8	6 PR	1.4	1360
					16	49	23	144			20	3000

A red tractor is shown from a side profile, moving across a lush green lawn. The tractor is equipped with a large, complex maintenance implement at the rear, featuring multiple rollers and brushes. A person is seated in the operator's seat, facing forward. The tractor has large, treaded tires with orange rims. A large, stylized orange arrow graphic points from the upper right towards the center of the image. The word "TURF" is written in large, white, bold, sans-serif capital letters across the middle of the image, partially overlapping the tractor and the background.

TURF

FEATURES AND BENEFITS

More rubber on
the contact surface

Better performance

in all soil and
turf conditions



Specific tread pattern

Improving stability &

traction also equal

load distribution



High tread depth

Better performance

in all soil and
turf conditions




Unique rounded
shoulder block design

No turf damage and
ease while turning




Unique alignment
of blocks

Excellent steering
stability and improved
lateral traction and
enables self-cleaning



Enlarged contact area

Improving stability
and traction



TURF XL

TRA CODE : R-3

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					INDUSTRIAL TRACTOR				
		mm	mm					Static	10	20	30	40
		in	in					Static	6	12	19	25
24X8.5-14	7JA	215 8	615 24	280 11	1830 72	4 4	1.6	1060	670	510	460	420
							23	2337	1477	1125	1014	926

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					INDUSTRIAL TRACTOR				
		mm	mm					Static	10	20	30	40
		in	in					Static	6	12	19	25
24X8.5-14	7JA	215 8	615 24	280 11	1830 72	4 4	1.6	1060	670	510	460	420
							23	2337	1477	1125	1014	926

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					INDUSTRIAL TRACTOR				
		mm	mm					Static	10	20	30	40
		in	in					Static	6	12	19	25
25X8.5-14	7JA	220 9	660 26	300 12	1960 77	6 6	3.4	1530	970	740	660	610
							49	3374	2139	1632	1455	1345

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					INDUSTRIAL TRACTOR				
		mm	mm					Static	10	20	30	40
		in	in					Static	6	12	19	25
25X8.5-14	7JA	220 9	660 26	300 12	1960 77	6 6	3.4	1530	970	740	660	610
							49	3374	2139	1632	1455	1345

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					INDUSTRIAL TRACTOR				
		mm	mm					Static	10	20	30	40
		in	in					Static	6	12	19	25
13.6-16	W12	365 14	960 38	420 17	2850 112	4 4	1.0	1690	950	790	760	710
							15	3726	2095	1742	1676	1566

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					INDUSTRIAL TRACTOR				
		mm	mm					Static	10	20	30	40
		in	in					Static	6	12	19	25
13.6-16	W12	365 14	960 38	420 17	2850 112	4 4	1.0	1690	950	790	760	710
							15	3726	2095	1742	1676	1566

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					INDUSTRIAL TRACTOR				
		mm	mm					Static	10	20	30	40
		in	in					Static	6	12	19	25
38X14-20	W11	355 14	975 38	420 17	2900 114	4 4	1.7	2810	1880	1400	1190	1060
							25	6196	4145	3087	2624	2337

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					INDUSTRIAL TRACTOR				
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40
		in	in	in	in	in	psi	Static	6	12	19	25
38X14-20	W11	355 14	975 38	420 17	2900 114	4 4	1.7	2810	1880	1400	1190	1060
							25	6196	4145	3087	2624	2337

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					INDUSTRIAL TRACTOR				
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40
		in	in	in	in	in	psi	Static	6	12	19	25
18X8.50-10	7.00 I - 55 I - 70	210 8	460 18	220 9	1370 54	4 4	1.5	590	375	360	340	320
							22	1301	827	794	750	706

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					INDUSTRIAL TRACTOR					
		mm	mm	mm	mm	mm	bar	Static	10	15	25	30	40
		in	in	in	in	in	psi	Static	6	9	16	19	25
26x 12.00-12	10.50 I - 55 I - 70	307 12	648 26	300 12	1920 76	8 8	1.4	1260	950	800	760	720	680
							20	2778	2095	1764	1676	1588	1499

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					INDUSTRIAL TRACTOR					
		mm	mm	mm	mm	mm	bar	Static	10	15	25	30	40
		in	in	in	in	in	psi	Static	6	9	16	19	25
26x 12.00- 12/4	10.50 I - 55 I - 70	307 12	648 26	300 12	1920 76	4 4	3.0	2090	1550	1320	1250	1190	1120
							44	4608	3418	2911	2756	2624	2470

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					INDUSTRIAL TRACTOR					
		mm	mm	mm	mm	mm	bar	Static	10	15	25	30	40
		in	in	in	in	in	psi	Static	6	9	16	19	25
26x 12.00-12	10.50 I - 55 I - 70	307 12	648 26	300 12	1920 76	10 10	3.8	2350	1750	1490	1420	1340	1270
							54	5182	3859	3285	3131	2955	2800

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)					
								Speed,km/h(mph)					
		SW	OD					INDUSTRIAL TRACTOR					
		mm	mm	mm	mm	mm	bar	Static	10	15	25	30	40
		in	in	in	in	in	psi	Static	6	9	16	19	25
23X 10.5-12	10.50 I - 55 I - 70	307 12	648 26	300 12	1920 76	12 12	4.5	2620	1950	1660	1580	1490	1410
							65	5777	4300	3660	3484	3285	3109

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					INDUSTRIAL TRACTOR				
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40
		in	in	in	in	in	psi	Static	6	12	19	25
23X10.5-12	8.50-I-90	265 10	585 23	270 11	1740 69	4 4	1.4	1090	690	520	470	440
							20	2403	1521	1147	1036	970

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					INDUSTRIAL TRACTOR				
		mm	mm				bar	Static	10	20	30	40
		in	in				psi	Static	6	12	19	25
23X10.5-12	8.5	265 10	585 23	270 11	1740 69	8 8	3.0	1820	1150	870	780	720
							44	4013	2536	1918	1720	1588

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					INDUSTRIAL TRACTOR				
		mm	mm				bar	Static	10	20	30	40
		in	in				psi	Static	6	12	19	25
22X9.50-12	7	226 9	555 22	260 10	1650 65	2 2	0.8	650	412	310	280	260
							12	1433	908	684	617	573

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					INDUSTRIAL TRACTOR				
		mm	mm				Static	10	15	30	40	40
		in	in				psi	Static	6	9	19	25
23X8.5-12	7	219 9	576 23	260 10	1710 67	6 6	2.3	1260	800	610	550	520
							33	2778	1764	1345	1213	1147

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					INDUSTRIAL TRACTOR				
		mm	mm				Static	10	15	30	40	40
		in	in				psi	Static	6	9	19	25
23X8.5-12	7	219 9	576 23	260 10	1710 67	4 4	1.5	970	615	470	420	400
							22	2139	1356	1036	926	882

FORESTRY



FEATURES AND BENEFITS

Strong and
straight lugs

High traction
across all surfaces




Reinforced sidewall
& shoulder deflector

Protection against
impacts & cuts



Deep and open
shoulder
Better self cleaning



Multi-layer Nylon
carcass with wide
steel breakers

Excellent puncture
resistance



Rim protector

Protects bead
against stub damage

LOGGER XL

TRA CODE : LS-2

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
								Constant Load				
		mm	mm					mm	mm	mm	bar	30
		in	in					in	in	in	psi	19
35.5L-32	DH31X 32	902	2011	898	6030	26	2.4	8750				
		36	79	35	237	26	35	19294				

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					30
		in	in	in	in	in	psi	19
23.1-26	DW20	587	1605	738	4670	12	2.4	4500
		23	63	29	184	12	35	9923

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					30
		in	in	in	in	in	psi	19
23.1-26	DW20	587	1605	738	4670	12	2.4	4500
		23	63	29	184	12	35	9923

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					30
		in	in	in	in	in	psi	19
23.1-26	DW20	587	1605	738	4670	12	2.4	4500
		23	63	29	184	12	35	9923

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					30
		in	in	in	in	in	psi	19
30.5L-32	DW27A X32	775	1847	860	5578	26	2.7	7100
		31	73	34	220	26	39	15656

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					30
		in	in	in	in	in	psi	19
28L-26	DW25A	730	1630	750	4970	12	2.4	5150
		29	64	30	196	12	35	11356

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					30
		in	in	in	in	in	psi	19
28L-26	DW25A	730	1630	750	4970	12	2.4	5150
		29	64	30	196	12	35	11356

FEATURES AND BENEFITS

Wide & robust
Lug Design

Excellent traction
& support for
track use



Specially designed
Tread and sidewall
compound

Provides protection to the tyre
from cuts & tears and
durability in rough terrain

Larger Tread Width

Ensures wider
footprint resulting in
low ground pressure



Steel belted
construction

Superior puncture resistance
& load carrying capacity



Uniquely designed
bead area

Prevents rim slippage

FOREST XL

TRA CODE : LS-2

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
								Constant Load
		mm	mm	mm	mm	mm	bar	40
		in	in	in	in	in	psi	25
710/45- 26.5	AG24.00X26.5	695	1345	626	4102	20	5.0	5600
		27	53	25	161	20	73	12348
710/45- 26.5	AG24.00X26.5	695	1345	626	4102	24	6.0	6500
		27	53	25	161	24	24	14333

CONSTRUCTION & INDUSTRIAL



FEATURES AND BENEFITS

Higher tread depth
with extra
thick sidewall

Improved traction &
puncture resistance



Strong nylon casing
Excellent durability



Specially designed
rim guards

Greater protection of
rim flange area

GM LOADER HD

TRA CODE : R-4

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					
10-16.5 HD	8.25	264	773	358	2320	10	5.2	1450
		10	30	14	91	10	75	3197

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					
12-16.5 HD	9.75	307	831	383	2490	12	5.5	1850
		12	33	15	98	12	80	4079

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					
12-16.5 HD	9.75	307	831	383	2490	14	5.5	2000
		12	33	15	98	14	80	4410

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm	mm	mm	mm	bar	40
		in	in	in	in	in	psi	25
27X10.5-15	8LB	684	256	310	2030	8	4.2	925
		27	10	12	80	8	61	2040

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm	mm	mm	mm	bar	40
		in	in	in	in	in	psi	25
27X10.5-15	8LB	684	256	310	2030	8	4.2	925
		27	10	12	80	8	61	2040

FEATURES AND BENEFITS

Multi-use
tread pattern
Heavy duty service



Specially formulated
compound
Cut & chip resistance

Strong nylon casing
Excellent durability



Specially designed
rim guards

Greater protection
of rim flange area



Extra deep tread
Long tyre life

GRIP X HD

TRA CODE : L-4

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm	mm	mm	mm	bar	40
12-16.5	9.75	in	in	in	in	in	psi	25
		315	838	388	2499	12	5.2	2135
		12	33	15	98	12	75	4708

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm	mm	mm	mm	bar	40
12-16.5	9.75	in	in	in	in	in	psi	25
		315	838	388	2499	12	6.2	2375
		12	33	15	98	12	90	5237

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm	mm	mm	mm	bar	40
		in	in	in	in	in	psi	25
12-16.5/3	9.75	315	838	388	2499	12	5.5	2865
		12	33	15	98	12	80	6317

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm	mm	mm	mm	bar	40
		in	in	in	in	in	psi	25
12-16.5/3	9.75	315	838	388	2499	12	6.2	3075
		12	33	15	98	12	90	6780

FEATURES AND BENEFITS

High abrasion-resistant compound
Enhanced durability



Deep treads
Better longevity



Broad lugs
Superior stability
and improved
self-cleaning



Specially designed rim guard
Protection against flats and rim flange damage

Strong nylon casing
Improved lateral stability

GRIP XL 5

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					10
		in	in					6
10-16.5	8.25	264	770	356	2296	10	5.2	2135
		10	30	14	90	10	75	4708

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD			Constant Load		
		mm	mm	mm	mm	mm	bar	10
		in	in	in	in	in	psi	6
10-16.5	8.25	264	770	356	2296	10	5.2	2135
		10	30	14	90	10	75	4708

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm	mm	mm	mm	bar	10
		in	in	in	in	in	psi	6
12-16.5	9.75	307	831	383	2490	10	5.5	2865
		12	33	15	98	10	80	6317

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm	mm	mm	mm	bar	10
		in	in	in	in	in	psi	6
12-16.5	9.75	307	831	383	2490	10	5.5	2865
		12	33	15	98	10	80	6317

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm	mm	mm	mm	bar	10
		in	in	in	in	in	psi	6
12-16.5	9.75	307	831	383	2490	10	5.5	2865
		12	33	15	98	10	80	6317

FEATURES AND BENEFITS



LOADER PRO HD

TRA CODE : R-4

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD			Constant Load		
		mm	mm	mm	mm	mm	bar	40
		in	in	in	in	in	psi	25
14-17.5	10.5	350	930	433	2743	14	5.5	2500
		14	37	17	108	14	80	5513

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
								Constant Load
		SW	OD				bar	40
		mm	mm	mm	mm	mm	psi	25
in	in	in	in	in	in	in	in	
15-19.5	11.75	382	1025	440	3040	6	4.8	3605
		15	40	17	120	6	70	7949

FEATURES AND BENEFITS

Special tread pattern

Excellent traction



Tie bar

Enhanced stability



Extra sidewall

Prevents sidewall damage



Wider tread width

Better performance



MPT 503

TRA CODE : R-4

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD			Constant Load		
		mm	mm	mm	mm	mm	bar	40
		in	in	in	in	in	psi	25
18-19.5	14	457	1110	503	3227	16	4.5	4500
		18	44	20	127	16	65	9923

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD			Constant Load		
		mm	mm	mm	mm	mm	bar	40
		in	in	in	in	in	psi	25
18-19.5	14	457	1110	503	3227	18	7.2	5450
		18	44	20	127	18	104	12017

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD			Constant Load		
		mm	mm	mm	mm	mm	bar	40
		in	in	in	in	in	psi	25
18-22.5	14	457	1180	543	3495	16	4.5	4875
		18	46	21	138	16	65	10749

FEATURES AND BENEFITS



MPT 602

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					
10.00-20	7	285	1075	480	3125	16	7.5	3000
		11	42	19	123	16	109	6615

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					
10.00-20	7	285	1075	480	3125	16	7.5	3000
		11	42	19	123	16	109	6615

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					50
		in	in					31
405/70-20 (16.0/70-20)	13	405	1085	505	3225	14	3.5	3250
		16	43	20	127	14	51	7166

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					50
		in	in					31
405/70-20 (16.0/70-20)	13	405	1085	505	3225	20	6.5	6000
		16	43	20	127	20	94	13230

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					50
		in	in					31
405/70-20 (16.0/70-20) /3	13	405	1080	505	3190	18	5.8	5150
		16	43	20	126	18	83	11356

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					50
		in	in					31
405/70-20 (16.0/70-20) /4	13	405	1186	547	3535	16	4.5	4000
		16	47	22	139	16	65	8820

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					65
		in	in					40
405/70-20 (16.0/70-20) /5	13	405	1186	547	3535	14	4.0	3450
		16	47	22	139	14	58	7607

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					65
		in	in					40
12.5-18	11	325	990	455	2910	12	3.5	2120
		13	39	18	115	12	51	4675

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm	mm	mm	mm	bar	65
		in	in	in	in	in	psi	40
12.5-18	11	325	990	455	2910	16	5.0	2800
		13	39	18	115	16	73	6174

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm	mm	mm	mm	bar	65
		in	in	in	in	in	psi	40
12.5-20	11	325	1040	475	3090	12	3.5	2180
		13	41	19	122	12	51	4807

FEATURES AND BENEFITS

Robust casing
Better lateral
stability



Superior tread
compound
Cut & chip resistance

MPT 800

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD			Constant Load		
		mm	mm	mm	mm	mm	bar	50
		in	in	in	in	in	psi	31
405/70-20 (16.0/70-20)	13	400	1088	480	3290	16	3.5	3250
		16	43	19	130	16	51	7166
405/70-20 (16.0/70-20)	13	400	1088	480	3290	16	3.5	3250
		16	43	19	130	16	51	7166
405/70-24 (16.0/70-24)	13	405	1188	551	3490	14	4.0	3550
		16	47	22	137	14	58	7828
405/70-24 (16.0/70-24)	13	405	1188	551	3490	16	4.5	4000
		16	47	22	137	16	65	8820

FEATURES AND BENEFITS

Strong nylon casing
Higher strength
and stability

Specially designed
wide lugs
Better self-cleaning



Superior tread
compound
Resistance to tearing
& cracking

MPT 808

TRA CODE : R-4

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
		SW	OD					Speed,km/h(mph)	
		mm	mm					Constant Load	
		in	in						
10.5-18	9	270	905	400	2690	12	4.5	2120	
		11	36	16	106	12	65	4675	

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
		SW	OD					Speed,km/h(mph)	
		mm	mm					Constant Load	
		in	in					40/1	40/2
10.0/75-15.3	9	260	775	365	2400	14	5.5	1900	1320
		10	31	14	94	14	80	4190	2911

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
		SW	OD	Constant Load					
		mm	mm	mm	mm	mm	bar	40/1	40/2
		in	in	in	in	in	psi	25-Jan	25-Feb
11.5/80-15.3	9	292	870	395	2580	14	4.8	2430	1700
		11	34	16	102	14	69	5358	3749

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD			Constant Load		
		mm	mm	mm	mm	mm	bar	50
		in	in	in	in	in	psi	31
12.5-18	11	325	990	450	2940	12	3.5	2180
		13	39	18	116	12	51	4807

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					50
		in	in					31
10.5-20	9	270	955	445	2880	12	4.3	2180
		11	38	18	113	12	62	4807

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
								Constant Load	
		SW	OD					40/1	40/2
		mm	mm	mm	mm	mm	bar	25-Jan	25-Feb
		in	in	in	in	in	psi		
12.0/75-18 (300/75-18)	W9	295	915	427	2755	12	4.0	2430	1700
		12	36	17	108	12	58	5358	3749

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
								Constant Load	
		mm	mm					mm	mm
		in	in					in	in
12.0-18	W9	295	930	430	2775	12	4.5	2900	
		12	37	17	109	12	65	6395	

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					50
		in	in					31
14.5-20	11	355	1098	505	3260	14	3.5	2725
		14	43	20	128	14	51	6009

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					50
		in	in					31
12.5-20	11	325	1040	475	3090	12	4.0	2500
		13	41	19	122	12	58	5513

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm					50
		in	in					31
18-19.5	11	457	1110	503	3227	18	7.3	5150
		18	44	20	127	18	105	11356

FEATURES AND BENEFITS

Unique tread pattern

Specially designed for

front wheel of

Backhoe Loaders

and Wheel Loaders

Strong Nylon Casing

High load carrying

capacity

Wider lugs

Offers excellent

traction



Industrial tread compound

Cut & chip resistant



TYROCK

TRA CODE : R-4

Size	TRA Code	Rim	Flange Height In	Tyre Type	Inflated tire dimension		SLR	RC	Load Index	Ply Rating	Inflation pressure	Recommended load, kg (lbs)
					SW	OD						Speed, km/h (mph)
												CONSTRUCTION
											mm	mm
in	in	in	in	Symbol	psi	25						
19.5L-24	R-4	W17L		TT	495	1335	592	3880	147 A8	10 PR	1.9	3075
					19.5	52.6	23.3	152.8			28	6780
19.5L-24	R-4	W17L		TT	495	1335	592	3880	151 A8	12 PR	2.3	3450
					19.5	52.6	23.3	152.8			33	7600
12.5/80-18	R-4	9		TL	308	988	465	2900	126 A8	10 PR	3.1	1700
					38.9	12.1	17.9	114.1	125 A8		45	3750
12.5/80-18	R-4	9		TL	308	988	465	2900	129 A8	12 PR	3.75	1850
					38.9	12.1	17.9	114.1	125 A8		54	4080
12.5/80-18	R-4	9		TL	308	988	465	2900	132 A8	14 PR	4.3	2000
					38.9	12.1	17.9	114.1	125 A8		62	4410
18.4-26	R-4	W16L		TL	467	1425	671	4275	159 A8	14 PR	2.9	4375
					18.4	56.1	26.4	168.3			42	9645
18.4-26	R-4	W16L		TL	467	1425	671	4275	156 A8	12 PR	2.5	4000
					18.4	56.1	26.4	168.3			36	8810
18.4-26	R-4	W16L		TL	467	1425	671	4275	156 A8	16 PR	3.2	4750
					18.4	56.1	26.4	168.3			46	10470
12.5/80-18	R-4	9	TL	308	988	465	2900	138 A8	18 PR	5.5	2360	
				38.9	12.1	17.9	114.1	125 A8		80	5200	

FEATURES AND BENEFITS

Open shoulders
Improved self-cleaning



Heat & cut resistant compound
Improved product life

Specially designed tread with heavy center mass
Heavy duty service



Large wide centre lugs
Excellent ground contact for maximum stability

TYROCK SUPER

TRA CODE : R-4

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					30
16.9-28	W15L	442	1450	679	4350	12	3	3875
		17	57	27	171	12	44	8544
16.9-28	W15L	440	1430	650	4233	14	1.9	2900
		17	56	26	167	14	28	6395
16.9-28/3	W15L	442	1430	650	4235	12	2.6	3550
		17	56	26	167	12	38	7828
16.9-30	W15L	442	1490	673	4395	14	3.1	4000
		17	59	26	173	14	45	8820

FEATURES AND BENEFITS

Specially designed tread with heavy center mass
Suitable for heavy duty service



Specially formulated compound
Specially formulated compound

Extra deep tread with special compound

Resistance to cuts and chipping
Higher durability



Extra deep thread
Higher Durability

TYROCK SUPER X3

TRA CODE : R-4

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)								
								Speed,km/h(mph)								
		SW	OD					INDUSTRIAL TRACTOR								
		mm	mm					mm	mm	mm	bar	Static	10	20	30	40
		in	in					in	in	in	psi	Static	6	12	19	25
23X8.5-14	7JA	205	598	270	1780	4	2.4	1060	670	510	460	420				
		8	24	11	70	4	35	2337	1477	1125	1014	926				

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)								
								Speed,km/h(mph)								
		SW	OD					INDUSTRIAL TRACTOR								
		mm	mm					mm	mm	mm	bar	Static	10	20	30	40
		in	in					in	in	in	psi	Static	6	12	19	25
27X8.5-15	7JA	218	693	310	2060	6	3.1	1770	1120	850	760	710				
		9	27	12	81	6	45	3903	2470	1874	1676	1566				

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					INDUSTRIAL TRACTOR				
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40
		in	in	in	in	in	psi	Static	6	12	19	25
12.4-16	10LB	308	940	410	2790	4	1.4	2260	1190	1040	990	950
		12	37	16	110	4	20	4983	2624	2293	2183	2095

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					INDUSTRIAL TRACTOR				
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40
		in	in	in	in	in	psi	Static	6	12	19	25
43X 16.00-20	W14L	400	1100	470	3270	4	1.4	3250	2060	1570	1400	1300
		16	43	19	129	4	20	7166	4542	3462	3087	2867

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					INDUSTRIAL TRACTOR				
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40
		in	in	in	in	in	psi	Static	6	12	19	25
15-19.5	11.75	382	1025	440	3040	6	2.1	4420	2800	2130	1900	1760
		15	40	17	120	6	30	9746	6174	4697	4190	3881

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					INDUSTRIAL TRACTOR				
		mm	mm	mm	mm	mm	bar	Static	10	20	30	40
		in	in	in	in	in	psi	Static	6	12	19	25
10.5/80- 18	W9	280	910	400	2700	8	2.8	3930	2060	1800	1720	1650
		11	36	16	106	8	41	8666	4542	3969	3793	3638

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
		SW	OD					Constant Load	
		mm	mm	mm	mm	mm	bar	40	
		in	in	in	in	in	psi	25	
18.4-24	W16	475	1375	612	4116	12	2.5	3875	
		19	54	24	162	12	36	8544	

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
		SW	OD					Constant Load	
		mm	mm	mm	mm	mm	bar	40	
		in	in	in	in	in	psi	25	
400/70-20	W13	395	1075	492	3228	16	3.2	2800	
		16	42	19	127	16	46	6174	

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
		SW	OD					Constant Load	
		mm	mm	mm	mm	mm	bar	40	
		in	in	in	in	in	psi	25	
17.5L-24	W15L	445	1252	560	3700	12	2.6	3000	
		18	49	22	146	12	38	6615	

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
		SW	OD					Constant Load	
		mm	mm					bar	40
		in	in	in	in	in	psi	25	
17.5L-24	W15L	445	1252	560	3700	8	1.9	2430	
		18	49	22	146	8	27	5358	

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
		SW	OD					Constant Load	
		mm	mm					bar	40
		in	in	in	in	in	psi	25	
440/80-24 (16.9-24)	W15L	438	1310	590	3805	12	2.6	3250	
		17	52	23	150	12	38	7166	

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
		SW	OD					Constant Load	
		mm	mm					bar	40
		in	in	in	in	in	psi	25	
440/80-24 (16.9-24)	W15L	438	1310	590	3805	8	2.0	2650	
		17	52	23	150	8	29	5843	

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
		SW	OD					Constant Load	
		mm	mm					bar	Static
		in	in	in	in	in	psi	Static	
440/80-24 (16.9-24)/3	W15L	1310	438	590	3805	18	4.0	4750	
		52	17	23	150	18	58	10474	

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
		SW	OD					Constant Load	
		mm	mm					bar	40 Static
		in	in	in	in	in	psi	25 Static	
19.5L-24	W17L	495	1335	592	3880	12	2.3	3450	3450
		19	53	23	153	12	33	7607	7607

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
		SW	OD					Constant Load	
		mm	mm					bar	40
		in	in	in	in	in	psi	25	
18.4-28	DW16L	472	1475	620	4380	12	2.5	4125	
		19	58	24	172	12	36	9096	

Size	RIM	Inflated Tire Dimension		SLR	RC	Inflation Pressure	Recommend load,kg (lbs)				
							Speed,km/h(mph)				
		SW	OD				INDUSTRIAL TRACTOR				
		mm	mm				bar	Static	10	20	30 40
		in	in	in	in	psi		Static	6	12	19 25
340/80-18 (12.5/80-18)	11	350	1015	440	3010	4.0		1260	800	610	540 2725
		14	40	17	119	58		2778	1764	1345	1191 6009

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)	
								Speed,km/h(mph)	
		SW	OD					Constant Load	
		mm	mm					Static	Static
		in	in	in	in	in	psi	Static	Static
27X10.5-15	8LB	684	256	310	2030	8	4.2	925	
		27	10	12	80	8	61	2040	

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					INDUSTRIAL TRACTOR				
		mm	mm					Static	10	20	30	40
		in	in	in	in	in	psi	Static	6	12	19	25
23X8.50-12	7	215	585	260	1740	12	6.2	1820	1150	870	780	720
		8	23	10	69	12	90	4013	2536	1918	1720	1588

FEATURES AND BENEFITS

Wide diagonal
lug design

Excellent traction &
improved stability



Specially formulated
compound

Heat, cut &
weather resistance

Strong nylon casing
High load carrying
capacity



GRIP MASTER EX

TRA CODE : E-2

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					
10.00-20	7	285	1075	480	3125	16	7.5	3000
		11	42	19	123	16	109	6615

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
		mm	mm					Constant Load
		in	in					
9.00-20	7	260	1040	468	2998	14	7.0	2500
		10	41	18	118	14	102	5513

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm	mm	mm	mm	bar	50
		in	in	in	in	in	psi	31
8.25-20	6.5	235	1088	505	2970	14	7.5	2430
		9	43	20	117	14	109	5358

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
								Speed,km/h(mph)
		SW	OD					Constant Load
		mm	mm	mm	mm	mm	bar	50
		in	in	in	in	in	psi	31
11.00-20	8	290	1088	505	3320	16	7.5	3550
		11	43	20	131	16	109	7828

FEATURES AND BENEFITS

Sturdy & robust
tyre for the drive
wheel application

Smooth & trouble-free
service in severe
conditions

Strong nylon casing
High loadability

Superior tread &
sidewall compound
Heat, cut & weather
resistant



GRADER XL

TRA CODE : G-2/L-2

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					GRADER SERVICE	LOADER SERVICE								
									mm	mm	mm	mm	mm	bar	40	bar	10
13.00-24	8	351	1301	610	4008	12	3	2725	4.5	5600							
		14	51	24	158	12	44	6009	65	12348							

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)									
								Speed,km/h(mph)									
		SW	OD					GRADER SERVICE	LOADER SERVICE								
									mm	mm	mm	mm	mm	bar	40	bar	10
13.00-24	8	351	1301	610	4008	16	3.8	3250	6.0	6500							
		14	51	24	158	16	55	7166	87	14333							

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)		
									Speed,km/h(mph)		
		SW	OD						GRADER SERVICE	LOADER SERVICE	
		mm	mm						40	bar	10
		in	in						25	psi	6
14.00-24	8	362	1348	614	3990	12	1.4	2.5	3075	4.3	6300
		14	53	24	157	12		36	6780	62	13892

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)		
									Speed,km/h(mph)		
		SW	OD						GRADER SERVICE	LOADER SERVICE	
		mm	mm						40	bar	10
		in	in						25	psi	6
14.00-24	8	362	1348	614	3990	16	1.4	3.5	3650	5.5	7300
		14	53	24	157	16		51	8048	80	16097

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)		
									Speed,km/h(mph)		
		SW	OD						GRADER SERVICE	LOADER SERVICE	
		mm	mm						40	bar	10
		in	in						25	psi	6
17.5-25	14	445	1348	624	3990	16	1.5	2.0	2900	3.5	6150
		18	53	25	157	16		29	6395	51	13561

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)		
									Speed,km/h(mph)		
		SW	OD						GRADER SERVICE	LOADER SERVICE	
		mm	mm						40	bar	10
		in	in						25	psi	6
17.5-25	14	445	1348	624	3990	20	1.5	3.0	3350	4.7	7300
		18	53	25	157	20		44	7387	68	16097

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)		
									Speed,km/h(mph)		
		SW	OD						GRADER SERVICE	LOADER SERVICE	
		mm	mm						40	bar	10
		in	in						25	psi	6
17.5-25/3	14	445	1348	614	3990	24	1.5	5.0	6000	6.8	9250
		18	53	24	157	24		73	13230	98	20396

FEATURES AND BENEFITS

More number
of lugs
Provides better
traction



Specially formulated
compound
Heat, cut &
weather resistant



Strong carcass
Reduced
mechanical failure

GRADER XL PLUS

TRA CODE : G-2/L-2

Size	TRA Code	Rim	"Flange Height In"	Tyre Type	Inflated tire dimension		SLR	RC	Load Index	Ply Rating	Inflation pressure	Recommended load, kg (lbs)
					SW	OD						Speed, km/h (mph)
					mm	mm						Grader Service
					in	in						40
13.00-24	G2/L2	8.0		TT	351	1301	610	4008		12 PR	3.0	2725
					14	51	24	158			44.0	6000

Size	TRA Code	Rim	"Flange Height In"	Tyre Type	Inflated tire dimension		SLR	RC	Load Index	Ply Rating	Inflation pressure	Recommended load, kg (lbs)
					SW	OD						Speed, km/h (mph)
					mm	mm						Grader Service
					in	in						10
13.00-24	G2/L2	8.0		TT	351	1301	610	4008		12 PR	4.5	5600
					14	51	24	158			65	12350

Size	TRA Code	Rim	"Flange Height In"	Tyre Type	Inflated tire dimension		SLR	RC	Load Index	Ply Rating	Inflation pressure	Recommended load, kg (lbs)
												Speed, km/h (mph)
					SW	OD						Grader Service
					mm	mm	mm	mm	Speed		bar	40
					in	in	in	in	Symbol		psi	25
13.00-24	G2/L2	8.0		TT	351	1301	610	4008		16 PR	3.8	3250
					14	51	24	158			54.0	7165

Size	TRA Code	Rim	"Flange Height In"	Tyre Type	Inflated tire dimension		SLR	RC	Load Index	Ply Rating	Inflation pressure	Recommended load, kg (lbs)
												Speed, km/h (mph)
					SW	OD						Grader Service
					mm	mm	mm	mm	Speed		bar	10
					in	in	in	in	Symbol		psi	5
13.00-24	G2/L2	8.0		TT	351	1301	610	4008		16 PR	6.0	6500
					14	51	24	158			87	14300

FEATURES AND BENEFITS



GMND
TRA CODE : G-3

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)				
		Speed,km/h(mph)											
		SW	OD	Constant Load									
		mm	mm	mm	mm	mm	mm	bar	25	10	5	1	Static
		in	in	in	in	in	in	psi	16	6	3	1	Static
14.00- 24	10	385	1368	630	4050	28	1.5	10	12500	13500	14500	16000	18000
		15	54	25	159	28		145	27563	29768	31973	35280	39690

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)						
									Speed,km/h(mph)						
									Constant Load						
		SW	OD												
		mm	mm						mm	mm	mm	mm	bar	25	10
		in	in	in	in	in	in	psi	16	6	3	1	Static		
18.00- 25	13	498	1615	738	4780	40	2.5	10.0	21250	22950	24650	27200	30600		
		20	64	29	188	40		145	46856	50605	54353	59976	67473		

FEATURES AND BENEFITS

Sturdy & robust
tyre for the drive
wheel application

Smooth &
trouble-free service
in severe conditions

Superior tread &
sidewall compound

Heat, cut &
weather resistant



Strong nylon casing
High loadability

GRIP MASTER-ND

TRA CODE : E-3/L-3

Size	TRA Code	Rim	"Flange Height In"	Tyre Type	Inflated tire dimension		SLR	RC	Load Index	Ply Rating	Inflation pressure	Recommended load,	
												kg (lbs)	
					SW	OD							Speed, km/h (mph)
					mm	mm						mm	mm
					in	in	in	in	Symbol		bar	10	
											psi	5.0	
18.00-25	E3/L3	13.00	2.5	TL	498	1673	764	4952		40 PR	9.50	17000	
					20	65.9	30.1	195			138	37480	

Size	TRA Code	Rim	"Flange Height In"	Tyre Type	Inflated tire dimension		SLR	RC	Load Index	ply Rating	Inflation pressure	Recommended load, kg (lbs)
					SW	OD						Speed, km/h (mph)
					mm	mm						Loading
					in	in						50
						mm	mm	Speed		bar	30.0	
						in	in	Symbol		psi	30.0	
18.00-25	E3/L3	13.00	2.5	TL	498	1673	764	4952		40 PR	7.00	9750
					20	65.9	30.1	195			102	21500

Size	TRA Code	Rim	“Flange Height In”	Tyre Type	Inflated tire dimension		SLR	RC	Load Index	Ply Rating	Inflation pressure	Recommended load, kg (lbs)
					SW	OD						Speed, km/h (mph)
					mm	mm						Loading
					in	in						50
18.00-25	E3/L3	13.00	2.5	TL	498	1673	764	4952		40 PR	7.00	9750
					20	65.9	30.1	195			102	21500

Size	TRA Code	Rim	“Flange Height In”	Tyre Type	Inflated tire dimension		SLR	RC	Load Index	Ply Rating	Inflation pressure	Recommended load, kg (lbs)
					SW	OD						Speed, km/h (mph)
					mm	mm						Loading
					in	in						10
18.00-25	E3/L3	13.00	2.5	TL	498	1673	764	4952		32 PR	7.50	15000
					20	65.9	30.1	195			109	33100

Size	TRA Code	Rim	“Flange Height In”	Tyre Type	Inflated tire dimension		SLR	RC	Load Index	Ply Rating	Inflation pressure	Recommended load, kg (lbs)
					SW	OD						Speed, km/h (mph)
					mm	mm						Loading
					in	in						50
18.00-25	E3/L3	13.00	2.5	TL	498	1673	764	4952		32 PR	5.57	8750
					20	65.9	30.1	195			83	19300

Size	TRA Code	Rim	“Flange Height In”	Tyre Type	Inflated tire dimension		SLR	RC	Load Index	Ply Rating	Inflation pressure	Recommended load, kg (lbs)
					SW	OD						Speed, km/h (mph)
					mm	mm						Loading
					in	in						10
14.00 - 25	E3/L3	10.00	1.5		385	1368	630	4050		24 PR	8.50	9500
					15	54	25	159			123	20945

Size	TRA Code	Rim	“Flange Height In”	Tyre Type	Inflated tire dimension		SLR	RC	Load Index	Ply Rating	Inflation pressure	Recommended load, kg (lbs)
					SW	OD						Speed, km/h (mph)
					mm	mm						Loading
					in	in						50
14.00 - 25	E3/L3	10.00	1.5		385	1368	630	4050		24 PR	6	5150
					15	54	25	159			83	11400

Size	TRA Code	Rim	“Flange Height In”	Tyre Type	Inflated tire dimension		SLR	RC	Load Index	Ply Rating	Inflation pressure	Recommended load, kg (lbs)
					SW	OD						Speed, km/h (mph)
					mm	mm						Loading
					in	in						10
14.00 - 25	E3/L3	10.00	1.5		385	1368	630	4050		20 PR	7.00	8500
					15	54	25	159			102	18740

Size	TRA Code	Rim	"Flange Height In"	Tyre Type	Inflated tire dimension		SLR	RC	Load Index	Ply Rating	Inflation pressure	Recommended load, kg (lbs)
					SW	OD						Speed, km/h (mph)
					mm	mm						Loading
					in	in						50
14.00 - 25	E3/L3	10.00	1.5		385	1368	630	4050		20 PR	4.75	4625
					15	54	25	159			69	10200

Size	TRA Code	Rim	"Flange Height In"	Tyre Type	Inflated tire dimension		SLR	RC	Load Index	Ply Rating	Inflation pressure	Recommended load, kg (lbs)
					SW	OD						Speed, km/h (mph)
					mm	mm						Loading
					in	in						10
14.00 - 24	E3/L3	10.00	1.5		385	1368	630	4050		28 PR	9.25	10000
					15	54	25	159			134	22045

Size	TRA Code	Rim	"Flange Height In"	Tyre Type	Inflated tire dimension		SLR	RC	Load Index	Ply Rating	Inflation pressure	Recommended load, kg (lbs)
					SW	OD						Speed, km/h (mph)
					mm	mm						Loading
					in	in						50
14.00 - 24	E3/L3	10.00	1.5		385	1368	630	4050		28 PR	6.50	5600
					15	54	25	159			94	12345

Size	TRA Code	Rim	"Flange Height In"	Tyre Type	Inflated tire dimension		SLR	RC	Load Index	Ply Rating	Inflation pressure	Recommended load, kg (lbs)						
					Speed, km/h (mph)													
					Industrial													
					SW	OD							bar	Static	1	5	10	25
					mm	mm	mm	mm	Speed				psi		0.6	3	5	15
in	in	in	in	Symbol														
14.00 - 24	IND -3	10.00	1.5	TT	385	1368	630	4050		28 PR	10	18000	16000	14500	13500	12500		
					15	54	25	159			145	39685	35275	31965	29760	27560		
18.00 - 25	IND -3	13.00	2.5	TL	498	1615	738	4780		40 PR	10	30600	27200	24650	22950	21250		
					20	64	29	188			145	67460	59965	54345	50595	46845		

FEATURES AND BENEFITS

R4 tread pattern

Suitable on & off

the road



Strong nylon casing

Capable to run at

high speeds

Superior compound

Designed for crane

& rescue vehicles



Tough wide base

Excellent traction &

handling response

LOADER XL

TRA CODE : G-2/L-2

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)		
									Speed,km/h(mph)		
		SW	OD						GRADER SERVICE	LOADER SERVICE	
		mm	mm						40	bar	10
		in	in	in	in	in	in	psi	25	psi	6
15.5-25	12	394	1278	594	3780	12	1.3	2.5	2650	4	5600
		16	50	23	149	12		36	5843	58	12348

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)		
									Speed,km/h(mph)		
		SW	OD						GRADER SERVICE	LOADER SERVICE	
		mm	mm						40	bar	10
		in	in	in	in	in	in	psi	25	psi	6
17.5-25	14	445	1348	624	3990	16	1.5	2.0	2900	3.5	6150
		18	53	25	157	16		29	6395	51	13561


Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)		
									Speed,km/h(mph)		
		SW	OD						GRADER SERVICE	LOADER SERVICE	
		mm	mm						40	bar	10
		in	in	in	in	in	in	psi	25	psi	6
17.5-25	14	445	1348	624	3990	20	1.5	3.0	3350	4.7	7300
		18	53	25	157	20		44	7387	68	16097

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)		
									Speed,km/h(mph)		
		SW	OD						GRADER SERVICE	LOADER SERVICE	
		mm	mm						40	bar	10
		in	in	in	in	in	in	psi	25	psi	6
17.5-25/3	14	445	1348	614	3990	24	1.5	5.0	6000	6.8	9259
		18	53	24	157	24		73	13230	98	20416

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)		
									Speed,km/h(mph)		
		SW	OD						GRADER SERVICE	LOADER SERVICE	
		mm	mm						40	bar	10
		in	in	in	in	in	in	psi	25	psi	6
20.5-25	17	520	1492	686	4416	12	2	1.8	3550	2.5	6700
		20	59	27	174	12		25	7828	36	14774

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)		
									Speed,km/h(mph)		
		SW	OD						GRADER SERVICE	LOADER SERVICE	
		mm	mm						40	bar	10
		in	in	in	in	in	in	psi	25	psi	6
20.5-25	17	520	1492	686	4416	16	2	2.3	4000	3.5	8250
		20	59	27	174	16		33	8820	51	18191

FEATURES AND BENEFITS

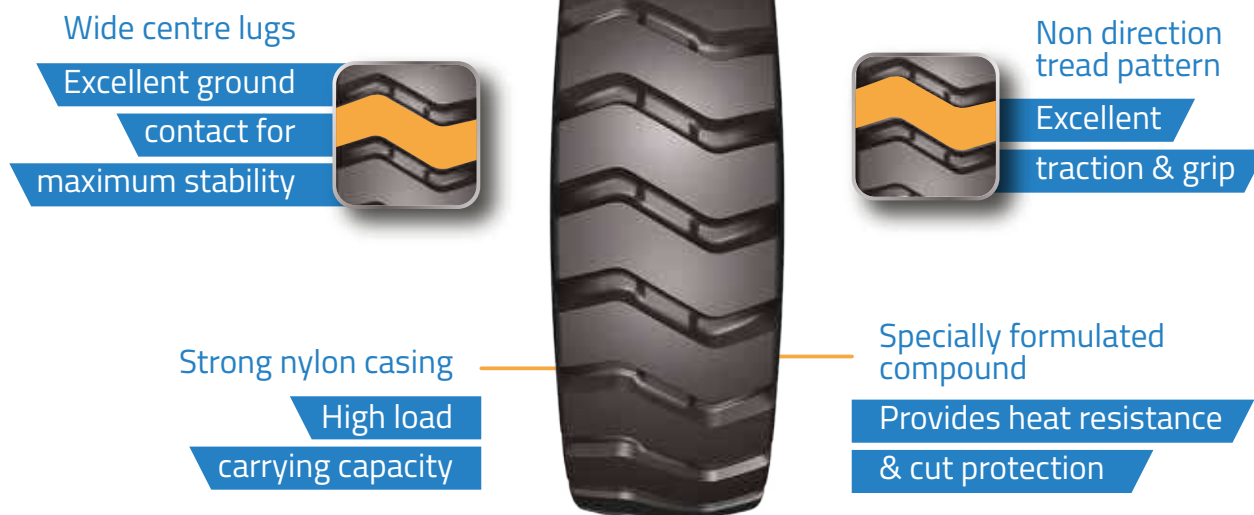

TRAC XL

TRA CODE : E-3/L-3

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)								
									Speed,km/h(mph)								
		SW	OD						Constant Load	Cyclic Operation							
										mm	mm	mm	mm	bar	50	bar	10
14.00-20	10	382	1266	583	3750	22	2	5.5	4365	8.5	8230						
		15	50	23	148	22		80	9625	123	18147						

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)		
									Speed,km/h(mph)		
		SW	OD						Constant Load	Cyclic Operation	
mm	mm	mm	mm	mm	mm	bar	50	bar	10		
in	in	in	in	in	in	psi	31	psi	6		
17.5-25	14	445	1348	624	3990	16	1.5	3.0	4250	4.8	7300
		18	53	25	157	16		44	9371	69	16097

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)			
									Speed,km/h(mph)			
		SW	OD						Constant Load	Cyclic Operation		
		mm	mm						50	bar	10	
		in	in	in	in	in	in	psi	31	psi	6	
17.5-25	14	445	1348	624	3990	20	1.5	4.0	5000	5.8	8250	
		18	53	25	157	20		58	11025	83	18191	

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)			
									Speed,km/h(mph)			
		SW	OD						Constant Load	Cyclic Operation		
		mm	mm						50	bar	10	
		in	in	in	in	in	in	psi	31	psi	6	
20.5-25	17	521	1493	686	4416	20	2	3.3	6000	4.5	9500	
		21	59	27	174	20		47	13230	65	20948	

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)			
									Speed,km/h(mph)			
		SW	OD						Constant Load	Cyclic Operation		
		mm	mm						50	bar	10	
		in	in	in	in	in	in	psi	31	psi	6	
23.5-25	19.5	597	1617	740	4786	20	2.5	2.3	6150	3.0	9500	
		24	64	29	188	20		33	13561	44	20948	

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)			
									Speed,km/h(mph)			
		SW	OD						Constant Load	Cyclic Operation		
		mm	mm						50	bar	10	
		in	in	in	in	in	in	psi	31	psi	6	
26.5-25	22	677	1750	798	5125	28	3	3.5	10000	4.8	15500	
		27	69	31	202	28		51	22050	69	34178	

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)			
									Speed,km/h(mph)			
		SW	OD						Constant Load	Cyclic Operation		
		mm	mm						50	bar	10	
		in	in	in	in	in	in	psi	31	psi	6	
29.5-25	25	762	1878	821	5435	32	3.5	3.8	12500	5.0	19250	
		30	74	32	214	32		54	27563	73	42446	

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)			
								Speed,km/h(mph)			
		SW	OD					Constant Load	Cyclic Operation		
		mm	mm					50	bar	10	
		in	in	in	in	in	psi	31	psi	6	
405/70-20 (16.0/70-20)	13	400	1088	480	3290	16	5.2	5735	4.0	3515	
		16	43	19	130	16	75	12646	58	7751	

FEATURES AND BENEFITS

Blocked diamond
pattern with higher
inner volume

Outstanding floating
characteristics



Specially formulated
compound

Resistance to cuts,
snags & bruises



Higher tread depth
with strong casing

High mileage
& durability



C 305

TRA CODE: R-3

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
								Constant Load				
		mm	mm					mm	mm	mm	bar	40
		in	in					in	in	in	psi	25
23.1-26	DW20	587	1560	690	4545	12	1.7	3650				
		23	61	27	179	12	88	8048				
23.1-26	DW20	587	1560	690	4545	16	2.3	4375				
		23	61	27	179	16	25	9647				
23.1-26/3	DW20	587	1560	690	4545	18	3.5	7750				
		23	61	27	179	18	40	17089				

AGRO INDUSTRIAL



FEATURES AND BENEFITS

Greater lug overlaps
and more lugs in
footprint

Uniform load
distribution



Extra reinforced
Sidewalls

Additional lateral
stability



Strong bead

Better carcass
strength and load
carrying capacity

LOAD PRO

TRA CODE : R-4

Size	RIM	Inflated Tire Dimension		SLR	RC	Inflation Pressure	Recommend load,kg (lbs)
							Speed,km/h(mph)
		SW	OD			Constant Load	
		mm	mm	mm	mm	bar	40
		in	in	in	in	psi	25
400/80-24	W13L	420	1275	580	3800	5	4750
		17	50	23	150	73	10474

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)
		SW	OD					Speed,km/h(mph)
								Constant Load
								40
								25
440/80-28	W15L	450	1425	638	4305	14	3.2	4000
		18	56	25	169	14	46	8820

Size	RIM	Inflated Tire Dimension		SLR	RC	Inflation Pressure	Recommend load,kg (lbs)
							Speed,km/h(mph)
							Constant Load
							40
		mm	mm	mm	mm	bar	25
		in	in	in	in	psi	25
440/80-24	W15L	441	1330	600	3940	5.0	5600
		17	52	24	155	73	12348

FEATURES AND BENEFITS

Unique R1 pattern
Excellent traction



Deep under tread
Improved puncture
resistance



Strong nylon casing
& thick sidewall
High radial & lateral
stability



LIFT PRO

TRA CODE : R-1

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)						
		SW	OD					Speed,km/h(mph)						
								Constant Load						
								mm	mm	mm	mm	bar	30-Jan	30/2
								in	in	in	in	in	psi	19-Jan
15.5/80-24	13	395	1250	562	3650	16	4	4875	3450					
		16	49	22	144	16	58	10749	7607					

Size	RIM	Inflated Tire Dimension		SLR	RC	LI/SS	Inflation Pressure	Recommend load,kg (lbs)								
		Speed,km/h(mph)														
		Constant Load						Cyclic Operation								
		SW	OD													
mm	mm	mm	mm	mm	mm	bar	Static	10	20	30	40	50	bar	10	15	
in	in	in	in	in	in	in	psi	Static	6	12	19	25	31	psi	6	9
460/70 R24	W15L W16L	455 17.9	1254 49.4	566 22.3	3750 147.6	159 A8/B	1.2	4970	2700	2350	2250	2160	2160	1.2	3240	2890
							17	10950	5950	5180	4960	4760	4760	17	7140	6370
							1.6	5890	3200	2790	2660	2560	2560	1.6	3840	3430
							23	12970	7050	6150	5860	5640	5640	23	8460	7560
							2.8	8170	4440	3870	3690	3550	3550	2.8	5330	4760
							41	18000	9780	8520	8130	7820	7820	41	11740	10480
							3.2	8830	4800	4190	3990	3840	3840	3.2	5760	5150
							46	19450	10570	9230	8790	8460	8460	46	12690	11340
							4	10060	5470	4770	4550	4375	4375	4	6560	5860
							58	22160	12050	10510	10020	9640	9640	58	14450	12910

MINING



FEATURES AND BENEFITS



ROCK XL

TRA CODE : E3/E-4

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)		
									Speed,km/h(mph)		
		SW	OD						Constant Load	Cyclic Operation	
		mm	mm						50	bar	10
		in	in	in	in	in	in	psi	31	psi	6
16.00-25	11.25	432	1493	682	4420	32	2	6.5	7300	8.8	12500
		17	59	27	174	32		94	16097	127	27563

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)		
									Speed,km/h(mph)		
		SW	OD						Constant Load	Cyclic Operation	
		mm	mm						50	bar	10
		in	in	in	in	in	in	psi	31	psi	6
16.00-25	11.25	432	1493	682	4420	40	2	8	8200	10	14500
		17	59	27	174	40		116	18081	145	31973

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)		
									Speed,km/h(mph)		
		SW	OD						Constant Load	Cyclic Operation	
		mm	mm						50	bar	10
		in	in	in	in	in	in	psi	31	psi	6
21.00-25	15	585	1759	800	5140	40	3	6.3	11850	8.3	20600
		23	69	31	202	40		91	26129	120	45423

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)		
									Speed,km/h(mph)		
		SW	OD						Constant Load	Cyclic Operation	
		mm	mm						50	bar	10
		in	in	in	in	in	in	psi	31	psi	6
18.00-25	13	498	1615	738	4780	40	2.5	7.0	9750	9.5	17000
		20	64	29	188	40		102	21499	138	37485

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)		
									Speed,km/h(mph)		
		SW	OD						Constant Load	Cyclic Operation	
		mm	mm						50	bar	10
		in	in	in	in	in	in	psi	31	psi	6
18.00-33	13	498	1877	866	5556	40	2.5	7.0	11200	9.5	19500
		20	74	34	219	40		102	24696	138	42998

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)		
									Speed,km/h(mph)		
		SW	OD						Constant Load	Cyclic Operation	
		mm	mm						50	bar	10
		in	in	in	in	in	in	psi	31	psi	6
21.00-35	15	595	2052	953	6125	36	3	6.3	14000	8.3	24300
		23	81	38	241	36		91	30870	120	53582

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)		
									Speed,km/h(mph)		
		SW	OD						Constant Load	Cyclic Operation	
		mm	mm						50	bar	10
		in	in	in	in	in	in	psi	31	psi	6
24.00-35	48	653	2175	998	6390	48	3.5	6.5	18500	8.5	31500
		26	86	39	252	48		94	40793	123	69458

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD					Constant Load		
		mm	mm					80		
		in	in	in	in	in	psi	50		
12.00-24	8.50E+00	315	1247	580	3740	20	7.9	3875		
		12	49	23	147	20	115	8544		

FEATURES AND BENEFITS

Extra deep tread & robust casing

Ideal for heavy duty application in mining, quarrying & rock excavation



Specially formulated compound

Heat, cut & weather resistance

Strong nylon casing

High load carrying capacity




GRIP MASTER XL

TRA CODE: E-4

Size	TRA Code	Rim	“Flange Height In”	Tyre Type	Inflated tire dimension		SLR	RC	Load Index	Ply Rating	Inflation pressure	Recommended load, kg (lbs)
					SW	OD						Speed, km/h (mph)
												Transport
											50	
											mm	mm
in	in	in	in	Symbol	psi	30						
18.00-25	IND-4	13	2.5	TL	498	1673	764	4952		32 PR	5.57	8750
					19.6	65.9	30.1	195			83	19300
18.00-25	IND-4	13	2.5	TL	498	65.9	30.1	195		40 PR	7	9750
					19.6	65.9	30.1	195			102	21500

Size	TRA Code	Rim	“Flange Height In”	Tyre Type	Inflated tire dimension		SLR	RC	Load Index	Ply Rating	Inflation pressure	Recommended load, kg (lbs)
					SW	OD						Speed, km/h (mph)
												Transport
												10
					mm	mm					mm	mm
in	in	in	in	Symbol	psi	5						
18.00-25	IND-4	13	2.5	TL	498	1673	764	4952		32 PR	7.5	15000
					19.6	65.9	30.1	195			109	33100
18.00-25	IND-4	13	2.5	TL	498	65.9	30.1	195		40 PR	9.5	17000
					19.6	65.9	30.1	195			138	37480

PORTS & MATERIAL HANDLING

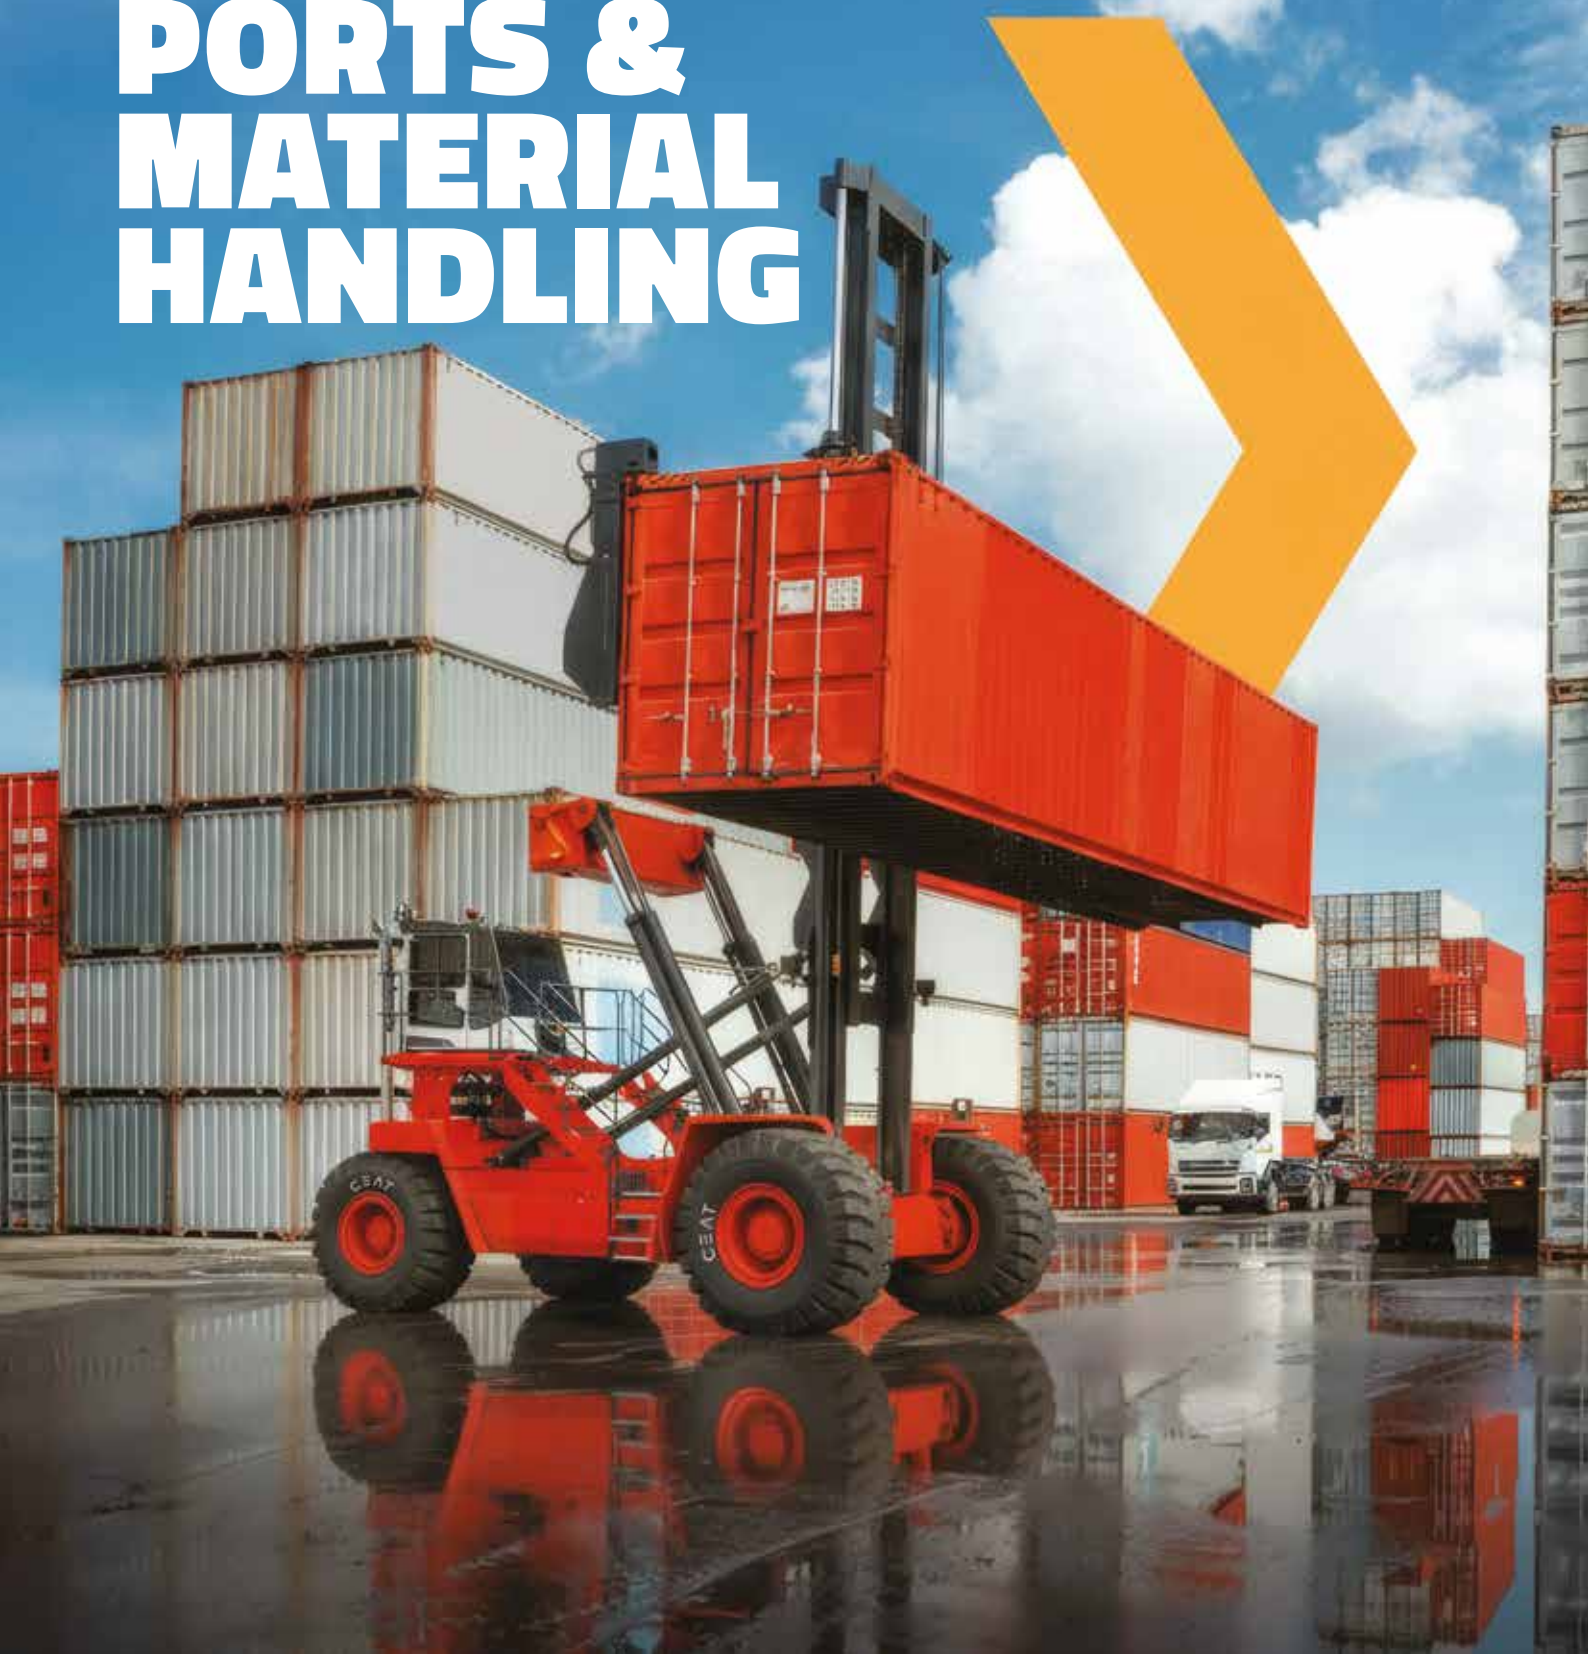

FEATURES AND BENEFITS



PORT PRO RX

TRA CODE : IND-4

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)				
								Speed,km/h(mph)				
		SW	OD					Constant Load				
		mm	mm					25	10	5	1	Static
		in	in	in	in	in	psi	16	6	3	1	Static
12.00-24	8.50E+00	315	1247	580	3740	20	9.9	8630	21250	25000	9320	22950
		12	49	23	147	20	144	19029	46856	55125	20551	50605

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)				
									Speed,km/h(mph)				
		SW	OD						Constant Load				
		mm	mm						25	10	5	1	Static
		in	in	in	in	in	in	psi	16	6	3	1	Static
18.00-25	13	498	1615	738	4780	40	2.5	10.0	27000	10000	24650	29000	11040
		20	64	29	188	40		145	59535	22050	54353	63945	24343
18.00-33	13	498	1877	866	5556	40	2.5	11.4	27200	32000	12420	30600	36000
		20	74	34	219	40		165	59976	70560	27386	67473	79380

FEATURES AND BENEFITS



PORT PRO TX

TRA CODE : IND-3

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)										
		SW	OD						Speed,km/h(mph)										
									Constant Load										
									mm	mm	mm	mm	mm	bar	25	10	5	1	Static
									in	in	in	in	in	in	psi	16	6	3	1
18.00-25	13	498	1615	738	4780	40	2.5	10.0	21250	22950	24650	27200	30600						
		20	64	29	188	40		145	46856	50605	54353	59976	67473						
21.00-25	15	585	1759	800	5140	40	3	10.0	25800	27800	29900	33000	37100						
		23	69	31	202	40		145	56889	61299	65930	72765	81806						
21.00-35	15	595	2052	953	6125	36	3	10.0	30400	32800	35200	38900	43700						
		23	81	38	241	36		145	67032	72324	77616	85775	96359						

FEATURES AND BENEFITS

Carries heavy loads
under extreme
working conditions

Special wear resistant
compound gives
extra life

Ideal for heavy duty application
at ports and container
handling application on hard
and improved surfaces like
concrete and asphalt

Can also be used for intermittent
highway surface



Higher base coverage compared
to IND 4 and promotes
reduced heat build up

More rubber and stronger
carcass accounts for more
life and higher stability

Better resistance to
puncture and impact
due to deep tread depth
and under tread

Extra deep tread
promotes longer life



PORT XL PLUS

TRA CODE : IND-4.5

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)				
									Speed,km/h(mph)				
		SW	OD						Constant Load				
		mm	mm						25	10	5	1	Static
		in	in	in	in	in	in	psi	16	6	3	1	Static
18.00-25	13	498	1615	738	4780	40	2.5	10.5	21250	22950	24650	27200	30600
		20	64	29	188	40		150	46856	50605	54353	59976	67473

FEATURES AND BENEFITS

Flat tread with large width

Self cleaning properties



Specially formulated tread compound

High ground contact area

for good traction on paved surface



Reinforced sidewall

Improved penetration resistance

PORT PRO SL

TRA CODE : IND-4/IND-5

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)				
									Speed,km/h(mph)				
									Constant Load				
		SW	OD										
		mm	mm						mm	mm	mm	mm	bar
		in	in	in	in	in	in	psi	16	6	3	1	Static
18.00-25	13	498	1673	764	4952	32	2.5	10.5	21250	22950	24650	27200	30600
		20	66	30	195	32		152	46856	50605	54353	59976	67473
18.00-33	13	498	1877	866	5556	40	2.5	11.4	25000	27000	29000	32000	36000
		20	74	34	219	40		165	55125	59535	63945	70560	79380

FEATURES AND BENEFITS

Reinforced Sidewall
Long service life



Specially formulated
tread compound

Improved penetration and
heat resistance



Flatter & larger
tread width

Higher ground contact
area & traction



SLICK-404

TRA CODE : IND-5S

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)						
								Speed,km/h(mph)						
								Constant Load						
		mm	mm					mm	mm	mm	bar	10	15	25
		in	in					in	in	in	psi	6	9	16
12.00-20	8.50E+00	316	1154	541	3462	20	7.8	6000	5220	4800				
		12	45	21	136	20	112	13230	11510	10584				

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
								Constant Load		
		SW	OD							
		mm	mm					mm	mm	mm
		in	in	in	in	in	psi	6	9	16
12.00-24	8.5	310	1270	592	3759	20	8.3	6900	6000	5520
		12	50	23	148	20	120	15215	13230	12172

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
								Constant Load		
		SW	OD							
		mm	mm					mm	mm	mm
		in	in	in	in	in	psi	6	9	16
12.00-24	8.5	310	1270	592	3759	24	9.8	7650	6656	6120
		12	50	23	148	24	141	16868	14676	13495

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)		
									Speed,km/h(mph)		
		SW	OD						Constant Load		
		mm	mm						mm	mm	mm
		in	in						in	in	in
14.00-24	10	385	1368	630	4050	28	1.5	10.0	15625	13625	12500
		15	54	25	159	28		145	34453	30043	27563

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)		
									Speed,km/h(mph)		
		SW	OD						Constant Load		
		mm	mm						mm	mm	mm
		in	in						in	in	in
14.00-24	10	385	1368	630	4050	28	1.5	5.8	8250	7180	6600
		15	54	25	159	28		83	18191	15832	14553

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)		
									Speed,km/h(mph)		
									Constant Load		
		SW	OD								
		mm	mm						mm	mm	mm
		in	in	in	in	in	in	bar	10	15	25
		in	in	in	in	in	in	psi	6	9	16
17.5-25	14	445	1348	624	3990	16	1.5	10.0	15625	13625	12500
		18	53	25	157	16		145	34453	30043	27563

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)		
									Speed,km/h(mph)		
									Constant Load		
		SW	OD								
		mm	mm						mm	mm	mm
		in	in	in	in	in	in	bar	10	15	25
		in	in	in	in	in	in	psi	6	9	16
17.5-25	14	445	1348	624	3990	16	1.5	5.8	8250	7180	6600
		18	53	25	157	16		83	18191	15832	14553

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)		
									Speed,km/h(mph)		
									Constant Load		
		SW	OD								
		mm	mm						mm	mm	mm
		in	in	in	in	in	in	bar	10	15	25
		in	in	in	in	in	in	psi	6	9	16
17.5-25	14	445	1348	624	3990	20	1.5	5.8	9825	8567	7860
		18	53	25	157	20		83	21664	18890	17331

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)		
									Speed,km/h(mph)		
		SW	OD						Constant Load		
		mm	mm						mm	mm	mm
		in	in						in	in	in
18.00-25	13	498	1673	764	4952	32	2.5	7.5	15000	13050	12000
		20	66	30	195	32		109	33075	28775	26460

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)		
									Speed,km/h(mph)		
		SW	OD						Constant Load		
		mm	mm						10	15	25
		in	in						in	in	in
18.00-25	13	498	1673	764	4952	40	2.5	9.5	17000	14790	13600
		20	66	30	195	40		138	37485	32612	29988

FEATURES AND BENEFITS

Reinforced Sidewall
Long service life



Specially formulated
tread compound

Improved penetration and
heat resistance



Flatter & larger
tread width

Higher ground contact
area & traction



SLICK-431

TRA CODE : IND-4S

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Flange Height	Inflation Pressure	Recommend load,kg (lbs)				
									Speed,km/h(mph)				
		SW	OD						Constant Load				
		mm	mm						25	10	5	1	Static
		in	in	in	in	in	in	psi	16	6	3	0.6	Static
16.00-25	11.25	432	1548	715	4580	32	2	10	15625	16875	18125	20000	22500
		17	61	28	180	32		145	34453	37209	39966	44100	49613

FEATURES AND BENEFITS



Extra thick sidewall

Improves sidewall stability and prevents accidental damages

Non-directional deep tread

Better tire life & heavy-duty material handling



Specially designed rim guard

Protects against wheel damages in the rim flange area




Tie bar at the center

Provides durability during application & uniform wear



Special tread compound

Better cut, chip & tear resistance, suitable for rough & hard concrete surfaces



ELEVETA X3

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD					Load Wheel	Steer Wheel	
		mm	mm					mm	mm	mm
		in	in					in	in	in
7.00-12	5	192	672	316	1956	12	8.5	2678	8.5	2060
		8	26	12	77	12	123	5905	123	4542

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD					Load Wheel	Steer Wheel	
		mm	mm					mm	mm	mm
		in	in	in	in	in	psi	16-Jan	psi	16-Feb
7.00-12	5	192	672	316	1956	14	9.0	2756	9.0	2120
		8	26	12	77	14	131	6077	131	4675

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD					Load Wheel	Steer Wheel	
		mm	mm					mm	mm	mm
		in	in	in	in	in	psi	16-Jan	psi	16-Feb
6.50-10	5	177	588	276	1711	10	7.8	1950	7.8	1500
		7	23	11	67	10	112	4300	112	3308

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD					Load Wheel	Steer Wheel	
		mm	mm					25-Jan	bar	25-Feb
		in	in	in	in	in	psi	16-Jan	psi	16-Feb
6.50-10	5	177	588	276	1711	12	9.0	2145	9.0	1650
		7	23	11	67	12	131	4730	131	3638

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD					Load Wheel	Steer Wheel	
		mm	mm					25-Jan	bar	25-Feb
		in	in	in	in	in	psi	16-Jan	psi	16-Feb
6.50-10/3	5	177	588	276	1711	14	10.0	2340	10.0	1800
		7	23	11	67	14	145	5160	145	3969

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD					Load Wheel	Steer Wheel	
		mm	mm					25-Jan	bar	25-Feb
		in	in	in	in	in	psi	16-Jan	psi	16-Feb
6.00-9	4	160	540	254	1571	10	8.5	1716	8.5	1316
		6	21	10	62	10	123	3784	123	2902

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD					Load Wheel	Steer Wheel	
		mm	mm					25-Jan	bar	25-Feb
		in	in	in	in	in	psi	16-Jan	psi	16-Feb
28X9-15 (8.15-15)	7	216	707	332	2057	14	10.0	3900	10.0	3000
		9	28	13	81	14	145	8600	145	6615

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD					Load Wheel	Steer Wheel	
		mm	mm					25-Jan	bar	25-Feb
		in	in	in	in	in	psi	16-Jan	psi	16-Feb
8.25-15	6.5	234	836	393	2433	14	8.0	4225	8.0	3250
		9	33	15	96	14	116	9316	116	7166

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD					Load Wheel	Steer Wheel	
		mm	mm					25-Jan	bar	25-Feb
		in	in	in	in	in	psi	16-Jan	psi	16-Feb
8.25-15	6.5	234	836	393	2433	16	9.3	4615	9.3	3515
		9	33	15	96	16	135	10176	135	7751

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD					Load Wheel	Steer Wheel	
		mm	mm					25-Jan	bar	25-Feb
		in	in	in	in	in	psi	16-Jan	psi	16-Feb
7.00-15	5.5	200	775	364	2255	12	8.3	3068	8.3	2360
		8	31	14	89	12	120	6765	120	5204

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD					Load Wheel	Steer Wheel	
		mm	mm					mm	mm	mm
		in	in					in	in	in
7.50-15	6	215	810	381	2357	12	8.0	3445	8.0	2650
		8	32	15	93	12	116	7596	116	5843

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD					Load Wheel	Steer Wheel	
		mm	mm					mm	mm	mm
		in	in					in	in	in
7.50-16	5.50F	205	805	377	2415	8	10.0	3770	10.0	2900
		8	32	15	95	8	145	8313	145	6395

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)			
								Speed,km/h(mph)			
		SW	OD					Load Wheel	Steer Wheel		
		mm	mm						25-Jan	bar	25-Feb
		in	in						16-Jan	psi	16-Feb
300-15	8	300	840	395	2444	20	9.0	6500	9.0	5000	
		12	33	16	96	20	131	14333	131	11025	

Size	RIM	Inflated Tire Dimension		SLR	RC	PR	Inflation Pressure	Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD					Load Wheel	Steer Wheel	
		mm	mm					25-Jan	bar	25-Feb
		in	in					16-Jan	psi	16-Feb
21x8-9	6	203	535	251	1557	18	10.0	2756	10.0	2120
		8	21	10	61	18	145	6077	145	4675

FEATURES AND BENEFITS




ELEVETA PLUS

Size	RIM	Inflated Tire Dimension		SLR	RC	PR		Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD				Inflation Pressure	Constant Load		
		mm	mm				mm	mm	bar	15
		in	in				in	in	in	psi
9.00-20	7	260	1040	468	2998	14	6.9	5805		
		10	41	18	118	14	100	12800		
10.00-20	7	285	1075	480	3125	16	7.9	6700		
		11	42	19	123	16	115	14774		

Size	RIM	Inflated Tire Dimension		SLR	RC	PR		Recommend load,kg (lbs)		
								Speed,km/h(mph)		
		SW	OD				Inflation Pressure	Constant Load		
		mm	mm				mm	mm	bar	15/1
		in	in				in	in	psi	9/1
12.00-20	8.5	315	1155	515	3305	20	9.0	9000		
		12	45	20	130	20	130	19845		
12.00-20	8.5	315	1155	515	3305	20	10.0	9640		
		12	45	20	130	20	145	21256		

FEATURES AND BENEFITS

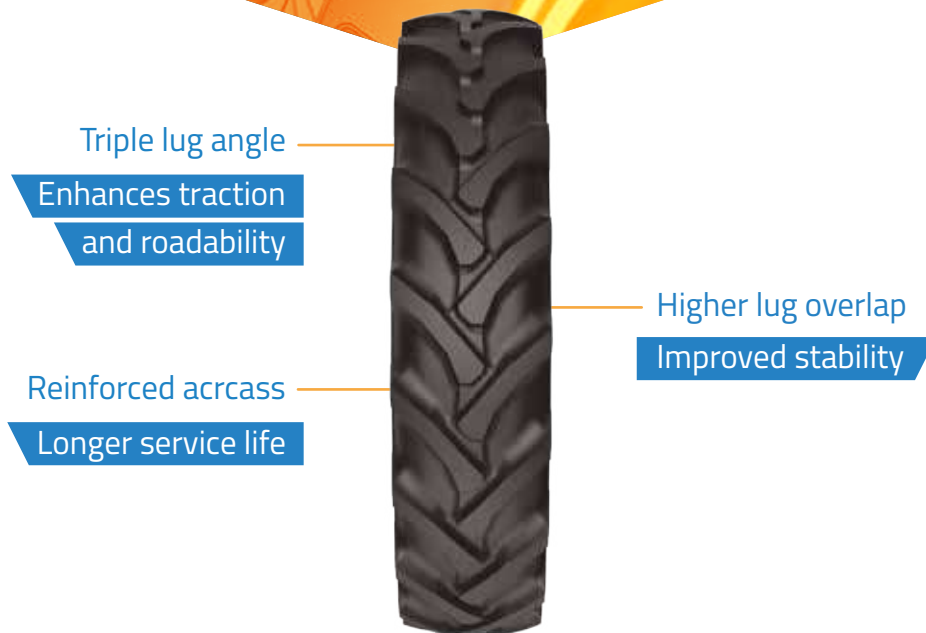

FARMAX +R1

Size	TRA Code	Rim	"Flange Height In"	Tyre Type	Inflated tire dimension		SLR	RC	Load Index	Ply Rating	Inflation pressure	Recommended load, kg (lbs)		
					SW	OD						Speed, km/h (mph)		
					mm	mm						Static	30	40
					in	in							19	25
12.4-24		W11		TT	315	1202	551	3570	125 A8	10PR	1.2	3300	1830	1650
					12	47	22	141			17.4	7270	4030	3640
18.4-30		W16		TT	467	1601	713	4750	149A8	12PR	2.3	6500	3610	3250
					18	63	28	187			33.35	14330	7960	7160
14.9-24		W13		TT	378	1319	586	3920	136 A8	12PR	2.6	4480	2490	2240
					15	52	23	154			37.7	9870	5490	4940
14.9-28		W 13		TT	378	1434	631	4260	134 A8	10PR	2.3	4240	2350	2120
					15	56	25	168			33.35	9340	5180	4670

WARRANTY POLICY



AGRICULTURE RADIAL TYRES:

Limited Manufacturing Warranty Applicable for 7 Years



YEARS FROM PRODUCTION OR SALE						
	1st & 2nd YEAR	3rd YEAR	4th YEAR	5th YEAR	6th YEAR	7th YEAR
IF WEAR % LESS THAN	25%	40%	50%	70%	80%	90%
Maximum CREDIT*	100%	60%	50%	30%	20%	10%



AGRICULTURE BIAS TYRES:

Limited Manufacturing Warranty Applicable for 5 Years



YEARS FROM PRODUCTION OR SALE				
	1st & 2nd YEAR	3rd YEAR	4th YEAR	5th YEAR
IF WEAR % LESS THAN	25%	40%	50%	70%
Maximum CREDIT*	100%	60%	50%	30%



OTR BIAS TIRES - RADIAL:

Limited Manufacturing Warranty Applicable for 5 Years

(Earthmover, Forestry, Industrial, Construction, Port & Mining Tires)



YEARS FROM PRODUCTION OR SALE				
	1st & 2nd YEAR	3rd YEAR	4th YEAR	5th YEAR
IF WEAR % LESS THAN	25%	50%	70%	80%
Maximum CREDIT*	100%	50%	30%	20%

*If tire wear is more than above mentioned, for each period, % credit will be calculated on pro-rata basis on last invoiced price of subject tire.

TYRE CARE & USAGE MANUAL



GENERAL INFORMATION

CEAT Agri radial tyres are designed for both off-road & on-road applications for equipment like agricultural tractors, trailers, implements & harvesters. Factors such as improper selection, handling & driving habits can reduce tyre life.

To obtain the best results from the tyre, correct inflation pressure has to be maintained at all times. It is recommended to check the inflation pressure after long breaks or on a daily basis. If the heat buildup due to the inflation pressure exceeds an additional 1.1 bar (16 psi) to 1.0 bar (14.5 psi), then the load or driving speed has to be lowered.

MOUNTING & DEMOUNTING

Always practice correct mounting & dismounting procedure by taking all safety measures.

DIMENSIONS

All the dimensions & tolerances in this catalogue are based on nominal TRA & ETRTO standards.

QUALITY SYSTEMS & CERTIFICATION

CEAT, an ISO 9001 certified company since 1994, also is the first tyre company in India to be certified with the most stringent quality certification of ISO/T5 16949: 2002 (QS 9000) from TUV.

The tyres manufactured by CEAT are DOT, ECE & INMETRO certified.


QUALITY POLICY

We at CEAT are committed to being customer-centric by consistently delivering excellent products & services at competitive prices.

We will endeavour to improve all business processes & ensure conformity to the established quality systems.

We intend to accomplish this by constantly upgrading the skills of our employees.

TYRE DESCRIPTION

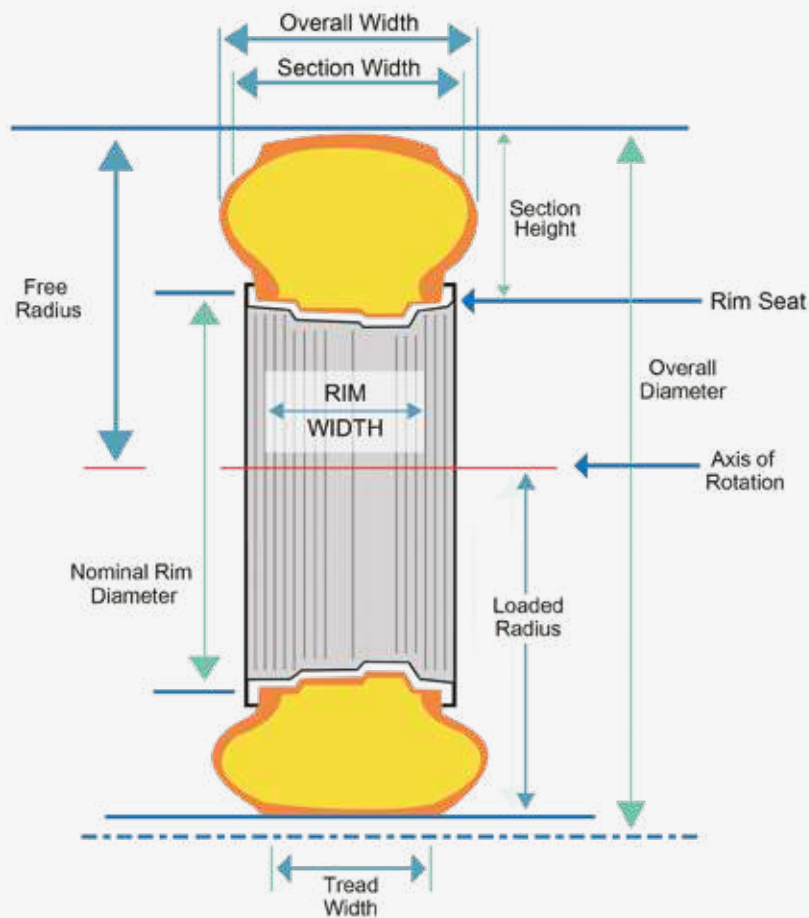

Section Height: The height of a new tyre from the nominal rim diameter to the top of the tread.

Section Width: The width of a new tyre including normal sidewalls, but not including protective side ribs, bars, or other decorations.

Overall Diameter: Twice the section height (unloaded) plus the nominal rim diameter.

Rim Width: The measurement on the inside of the rim between the two flanges.

Rim Diameter Code: The nominal rim diameter in inches.

Rolling Circumference: The distance an inflated & loaded tyre will roll in one revolution.

Aspect Ratio: Used to describe the ratio of tyre "section height" to "section width." A tyre with an aspect ratio of 85 would have a tyre height equal to 85% of the tyre's greatest width.

TYRE NOMENCLATURE


440/65 R 24

RADIAL



17.5 - 25



BIAS

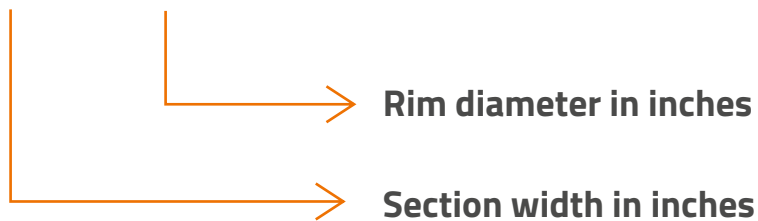

500/50 - 17



TYRE SIDEWALL MARKING

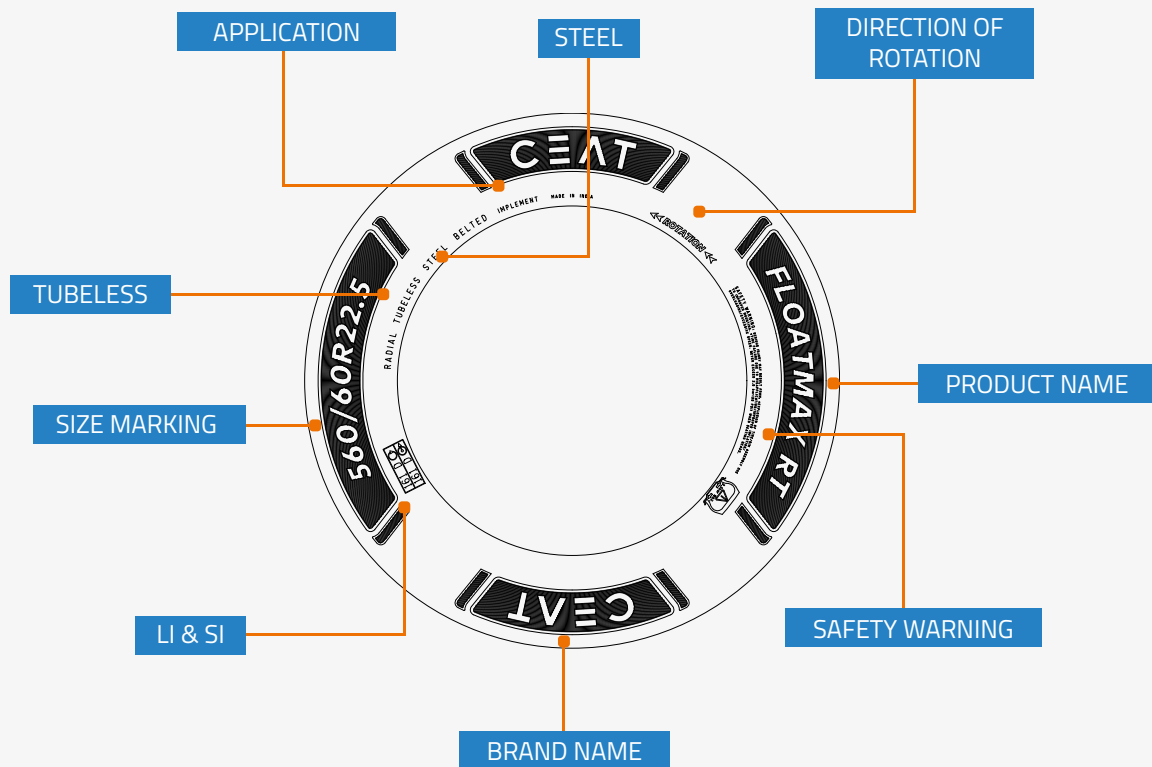

Travel direction in case of directional tread design



Safety warning

Tubeless

Tubeless - TYREs without tube



Free rolling & drive wheels

Load Index: Relates to the Maximum weight permitted for each tyre at a set inflation pressure.

Speed Index: Is the Maximum rated speed the tyre can operate at safety. For application at lower speed load carrying capacity of tyre increases & vice versa.

L(In Size Designation): Low section height farm tyres

SL(In Size Designation): Service limited to agricultural usage

NHS: Not for highway service

ML: Mining logging (Intermittent highway use)

DT: Desert tyre (Sand surface & asphalt spreader)

LOAD INDEX & SPEED SYMBOL

According to ETRTO (The European Tyre & Rim Technical Organisation), as well as to ECE (Economic Commission for Europe-UN Institution Geneva), the Maximum load capacity, as well as the Maximum speed are indicated by load index & speed symbol.

The following table shows the meaning of each speed symbol & the load in kg/lbs corresponding to each load index:

Load Index	Load Kg / lbs	Load Index	Load Kg / lbs	Load Index	Load Kg / lbs	Load Index	Load Kg / lbs	Speed Symbol	Kmph / mph
102	850 / 1874	129	1850 / 4078	156	4000 / 8818	183	8750 / 19290	A1	5 / 3
103	875 / 1929	130	1900 / 4189	157	4125 / 9094	184	9000 / 19841	A2	10 / 6
104	900 / 1984	131	1950 / 4299	158	4250 / 9369	185	9250 / 20392	A3	15 / 9
105	925 / 2039	132	2000 / 4409	159	4375 / 9645	186	9500 / 20944	A4	20 / 12
106	950 / 2094	133	2060 / 4541	160	4500 / 9921	187	9750 / 21495	A5	25 / 16
107	975 / 2149	134	2120 / 4674	161	4625 / 10196	188	10000 / 22046	A6	30 / 19
108	1000 / 2205	135	2180 / 4806	162	4750 / 10472	189	10300 / 22707	A7	35 / 22
109	1030 / 2271	136	2240 / 4938	163	4875 / 10747	190	10600 / 23369	A8	40 / 25
110	1060 / 2337	137	2300 / 5071	164	5000 / 11023	191	10900 / 24030	B	50 / 31
111	1090 / 2403	138	2360 / 5203	165	5150 / 11354	192	11200 / 24691	C	60 / 37
112	1120 / 2469	139	2430 / 5357	166	5300 / 11684	193	11500 / 25353	D	65 / 40
113	1150 / 2535	140	2500 / 5511	167	5450 / 12015	194	11800 / 26014	E	70 / 44
114	1180 / 2601	141	2575 / 5677	168	5600 / 12346	195	12150 / 26786	F	80 / 48
115	1215 / 2679	142	2650 / 5842	169	5800 / 12787	196	12500 / 27557	G	90 / 56
116	1250 / 2756	143	2725 / 6007	170	6000 / 13228	197	12850 / 28329	J	100 / 62
117	1285 / 2833	144	2800 / 6173	171	6150 / 13558	198	13200 / 29101	K	110 / 68
118	1320 / 2910	145	2900 / 6393	172	6300 / 13889	199	13600 / 29982	L	120 / 75
119	1360 / 2998	146	3000 / 6614	173	6500 / 14330	200	14000 / 30864	M	130 / 81
120	1400 / 3086	147	3075 / 6779	174	6700 / 14771	201	14500 / 31966	N	140 / 87
121	1450 / 3197	148	3150 / 6944	175	6900 / 15212	202	15000 / 33069	P	150 / 93
122	1500 / 3307	149	3250 / 7165	176	7100 / 15653	203	15500 / 34171	Q	160 / 99
123	1550 / 3417	150	3350 / 7385	177	7300 / 16093	204	16000 / 35273	R	170 / 106
124	1600 / 3527	151	3450 / 7606	178	7500 / 16534	205	16500 / 36376	S	180 / 112
125	1650 / 3638	152	3550 / 7826	179	7750 / 17086	206	17000 / 37478		
126	1700 / 3748	153	3650 / 8047	180	8000 / 17637	207	17500 / 38580		
127	1750 / 3858	154	3750 / 8267	181	8250 / 18188	208	18000 / 39683		
128	1800 / 3968	155	3875 / 8543	182	8500 / 18739	209	18500 / 40785		

RMA CODE FOR AGRICULTURAL TYRES & TYPE OF TYRE SERVICE

RMA INDUSTRY CODES

The Tyre & Rim Association has approved the following Tyre designations for agricultural Tyres, regardless of manufacturer.

CODE	INDUSTRY Tyre TYPE	Tyre SERVICE
Front Tractor Tyres		
F-1	Agricultural single-rib tread	Rice farming
F-2M	Agricultural multiple-rib tread	General farming
F-2	Agricultural multiple-rib tread	General farming
F-3	Industrial multiple-rib tread	Light industrial service
F-2D	Agricultural dual-rib	
Drive Tractor Tyres		
R-1	Drive wheel, regular tread	General farming
R-1W	Drive wheel, wet traction tread	Wet or moist soil
R-2	Cane & Rice, drive wheel, deep tread	Wet muck
		Sugar cane
		Rice farming
R-3	Drive wheel, shallow tread	Sandy or volcanic
		Ash soils
		Orchards
		Highway mowing
		Golf course work
		Light industrial service
R-4	Industrial tractor, drive wheel, intermediate tread	Light industrial service
		Highway mowing
Flotation Tyres		
HF- 1	High flotation, rib tread	Golf course work
HF-2	High flotation, regular lug tread	General farming
HF-3	High flotation, deep lug tread	Wet or moist soil
HF-4	High flotation, extra deep tread	Swamp land
Garden Tractor Tyres		
	Lug Type	Gardens
Implement Tyres		
I-1	Rib tread	Free rolling wheels
I-2	Moderate traction implement	Drive or free rolling wheels
I-3	Traction tread	Drive wheels
I-6	Smooth tread	

CONVERSION TABLE

1 centimetre	cm	= 0.3937 inch	1 litre	l	= 0.264 US gallon
1 inch	in	= 2.54 cm	1 US gallon	gal	= 3.785 litres
1 Metre	m	= 3.281 feet	1 kilogram	kg	= 2.205 pounds
1 foot	ft	= 0.3048 m	1 kilogram	kg	= 1 da N (de anewton)
1 kilometre	km	= 1. 6093 km	1 Pound	lb	=0.4536 kg
1 mile	mi		1 bar		= 14.484 p.s.i. (Pounds per square inch)
			1 bar		= 100 kpa (kilo pascal)

PRESSURE CONVERSION TABLE

PSI	BAR	KPA	PSI	BAR	KPA	PSI	BAR	KPA
10	0.7	70	29	2	200	48	3.3	330
11	0.8	80	30	2.1	210	49	3.4	340
12	0.8	80	31	2.1	210	50	3.4	340
13	0.9	90	32	2.2	220	51	3.5	350
14	1	100	33	2.3	230	52	3.6	360
15	1	100	34	2.3	230	53	3.7	370
16	1.1	110	35	2.4	240	54	3.7	370
17	1.2	120	36	2.5	250	55	3.8	380
18	1.2	120	37	2.6	260	56	3.9	390
19	1.3	130	38	2.6	260	57	3.9	390
20	1.4	140	39	2.7	270	58	4	400
21	1.4	140	40	2.8	280	59	4.1	410
22	1.5	150	41	2.8	280	60	4.1	410
23	1.6	160	42	2.9	290	61	4.2	420
24	1.7	170	43	3	300	62	4.3	430
25	1.7	170	44	3	300	63	4.3	430
26	1.8	180	45	3.1	310	64	4.4	440
27	1.9	190	46	3.2	320	65	4.5	450
28	1.9	190	47	3.2	320	66	4.5	450

TYRE CARE & MAINTENANCE GUIDELINES

GENERAL

1. Tyre mounting & dismounting can be dangerous & should only be performed by trained personnel.
2. Never strike the tyre or rim with a hammer.
3. Always use proper tyre mounting tools & equipment.
4. Always work on a clean surface.

MOUNTING

1. Thorough inspection of the inside of the casing is necessary to ensure absence of any defects or foreign material.
2. Both tyre & tube (if any) should be completely dry.
3. Use the correct tube. Always remember that with a new tyre, a new tube (if required) should be used.
4. For tube type tyres, make sure the tube & flap are correct & not damaged.
5. Always prepare a new O-ring for tubeless tyres. Check air leakage points.
6. Correct rims which are clean & in good condition should be used for tyre mounting.
7. Proper lubrication to rims & beads helps to facilitate easy & safe mounting
8. Application of excessive lubricant causes the tyre to slip on the rim, hence it is not recommended.
9. Mount the tyre with the pry notch 60° to 90° from the valve.
10. Always mount (& dismount) tyres on the short side of the rim drop centre.
11. Always keep the opposite bead in the deep well to facilitate clearance over the rim flange to prevent bead damage.

INFLATION & PROPER BEAD SEATING

1. Once a tyre is mounted, the beads should be seated before the lubricant dries.
2. Safety cage or a security bar should be used during inflation. In case the cage & bar is absent, stand to one side of the tyre & use an air line with a clip-on chuck & an in-line gauge that is at least 6 feet from the tyre valve.
3. Centre the tyre on the rim & inflate to 35 psi (2.4 bar) to obtain the initial bead set.
4. Deflate the tyre to about 2 psi (0.14 bar) to partially relax the beads.
5. Re-inflate the tyre to 35 psi (2.4 bar) to obtain the final bead set.
6. Adjust the tyre to the correct working pressure.
7. Ensure the pressure is correct at all times. Check the pressure regularly & adjust it whenever necessary.
8. Check the loads & their centring periodically.
9. Check the traveling cycles & the actual operating speed.
10. Thoroughly inspect the centring rings above the inside & outside beads to ensure that they are completely seated.

11. If a bead is not completely seated:

- Deflate the tyre completely & re-inflate to 35 psi (2.4 bar).
- If a bead is not completely seated at this point, deflate the tyre, break the beads away from the rim, rotate the tyre 90° & re-lubricate the beads & the rim, & repeat steps 3 through 7 above.

12. Use proper inflation pressure. Never under-inflate or over inflate the tyres. Never inflate an agricultural tyre over 35 psi (2.4 bar) to seat the beads.

BALLASTING

To achieve better traction & enhance performance, the tyres are often ballasted.

Ballasting can be done in two ways:

1. Inserting substances inside the tyre.
2. Attaching counter weights to the back of the vehicle.

Since the second method involves welding or bolting weights to the back of the vehicles, many operators choose the first method of tyre ballasting. This practice is used to enhance the performance of front-end loaders, motor graders or grader tractors. Ballasting helps keep the rear tyres of the front-end loaders grounded.

Ballasting is usually done by filling the tyre with water. In cold climatic conditions, anti-freezing substances like Calcium Chloride (80%) or Magnesium Chloride (47%) can be added.

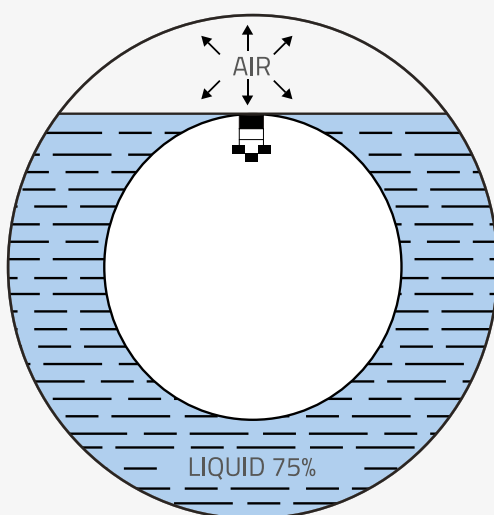


DIAGRAM 1

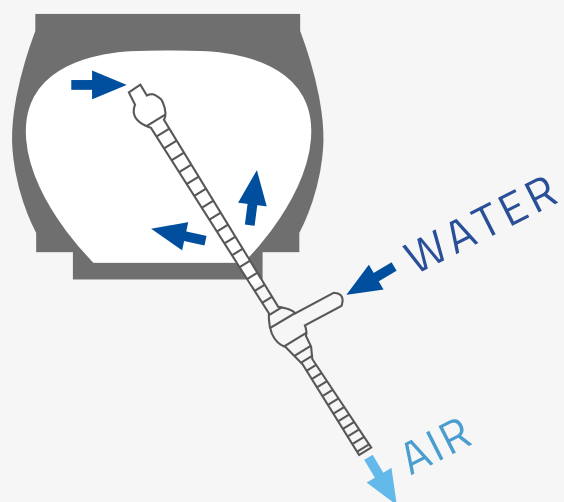


DIAGRAM 2

Ballasting tyres with a liquid

Agricultural tyre valves are of the “air & water type”. Therefore, filling up to a Maximum of 75 % (Diagram 1), with liquid (water + antifreeze) is possible.

In winter, a glycol-based antifreeze product should be used as temperatures may fall below zero. With the air water valve at the top, fill the inner tube or tubeless tyre up to the height of the valve, while allowing the air to escape (Diagram 2).

Inflation & pressure are adjusted to the air. Since the volume of air responsible for pressure is low (around 25% of the volume), regular monitoring of the tyre pressure is essential. We recommend verification on a monthly basis.

However, the following points must be taken into consideration while using tyre ballasting practice:

- Before rotating ballasted tyres, the ballasting solution (liquid) or material (dry) must be removed & properly disposed off.
- Ballasting solution can facilitate rim rust. The rim should be well painted or the solution must contain rust-prohibitive ingredients.

Demounting

1. Follow the reverse process of mounting to demount the tyre from the rim.
2. Tyres with a pry notch above the bead should be lubricated at the notch before pushing the bead away from the rim flange.
3. Lubricate around the bead circumference as it is worked away from the flange.
4. Lubricate the back bead & the rim flange during dismounting.

DEFINITION OF TERMS

Agricultural Tractor

Self-propelled agricultural vehicle having at least two axles & wheels, or endless tracks, particularly designed to pull agricultural trailers, & pull, push, carry & operate implements used for agricultural work (including forestry work), which may be provided with a detachable loading platform.

The agricultural vehicle has a Maximum design speed of not less than 6 kmph & may be equipped with one or more seats.

Two-wheel drive tractor (2WD)

Agricultural tractor with traction power provided only through the rear tyres. The front tyres are smaller than the rear & typically use a profile type with no traction capability.

Four-wheel drive tractor with equal sized wheels (4WD)

All-wheel drive tractor with equal sized wheels having power in both axles.

Compact utility tractor

Agricultural tractor equipped with a 540-rpm rear PTO & a three-point hitch designed for Category I implements only.

These tractors generally have a mass of less than 1800 kg; have less than 30 PTO kW, & are primarily designed & advertised for use with mowers & light-duty material handling equipment. The rear PTO & hitch categories are defined by ISO 500 1 & ISO 730, respectively.

IMPORTANT PARAMETERS FOR MAXIMUM TYRE LIFE

Following are some important parameters needed to be monitored in order to get Maximum tyre life:

- To obtain Maximum tyre life, operate within the recommended load inflation pressure schedule.
- Sufficient tyre-to-vehicle clearance
- Removal of rocks & debris trapped between dual tyres, between the tyre & the vehicle, or in the tyre's grooves.
- Proper matching of dual tyres, that is, the inflated diameters of both tyres should match.
- Keep the tyres free from oil, grease, etc.
- To keep proper tyre performance record check:
 1. Brand & serial no.
 2. New tyre tread depth
 3. Original & subsequent installations & removals by unit number & position
 4. Final disposition - scrap, repair, retread, total hours or miles of service & date of removal
- Thorough & accurate record-keeping helps determine problem areas causing failures.
- Proper attention should be given to vehicle mechanical irregularities such as misalignment, improperly adjusted brakes or defective brake drums, etc., which damage tyres.
- Proper checking & maintenance of rims or wheels & valves.
- Proper storage of tyres. Tyres should be stored in cool & dark places, free from dirt, oil or sunlight & as far as possible, from running electric motors (as these generate ozone which deteriorates rubber.)
- Prompt repair of service damaged tyres. There are usually three major types of cuts or damage which occur in tyres.
- Tread surface cuts - these cuts might look minor, but they tend to pick up & hold stones. If the stones are not removed, they can work their way into the carcass, resulting in tyre failure.
- Cuts through the tread - damage from this type of injury may lead to premature tyre failure. When it is determined that the carcass of the tyre has been damaged, the tyre should be removed from service immediately & sent to a qualified repair facility.
- Sidewall cuts - these are repairable, depending on the location & extent of the damage.

PROPER HANDLING & TRANSPORTING TYRES

While transporting tyres, particular care must be taken to ensure that the beads & inner liner of the tyre are not damaged. Even minor damage could result in premature tyre failure due to air seeping into the body of the tyre, causing a separation.

CORRECT



INCORRECT



GOOD



BAD



BAD

PROPER STORAGE:

- Do not store tyres for longer periods.
- Tyres/tubes must not get exposed to direct sunlight during storage.
- Storage area must be free from dirt & oils and away from electric engines.

SAFETY PRECAUTIONS

1. NEVER re-inflate a tyre that has been in a run-flat or underinflated condition (80% or less of recommended pressure).
2. ALWAYS use specialised tools as recommended by the tyre suppliers for mounting & demounting the tyres.
3. BEFORE loosening any nuts or clamps that attach a multi-piece rim assembly to a vehicle, always completely deflate the tyre (both tyres of a dual assembly) by taking out the valve core(s). Never attempt to demount a tyre from a rim unless you are sure that the tyre is completely deflated. Failure to follow this practice can cause the assembly to burst with force sufficient to cause serious injury or death.
4. NEVER use any rim part that is bent, pitted from corrosion, cracked or worn. These are unserviceable parts & must be destroyed so that they cannot be used. Remove rust, dirt or foreign material from rim parts.
5. NEVER use a rim part unless you can positively identify it from the manufacturer's stamped markings. If you cannot identify a part, it must be destroyed.
6. ALWAYS inspect the inside of a tyre for loose cords, cuts, penetrating objects or other casing damage. Training personnel must repair repairable damage before placing the tyre back into service. Tyres with irreparable damage should be destroyed.
7. NEVER substitute an inner tube for a permissible or non-permissible repair.
8. ALWAYS replace a tyre with one having the same rim diameter designation & suffix letters.
9. ALWAYS inspect the inside of a tyre & remove dirt, liquids or other foreign material before mounting.
10. NEVER install tubes that have buckled or been creased.
11. ALWAYS use radial tubes with radial tyres.
12. ALWAYS use new tubes with new tyres.
13. NEVER use a tube in a casing larger or smaller than that for which the manufacturer designed the tube.

14. ALWAYS check to be sure that the tube is clean before installing it in the tyre.
15. ALWAYS lubricate with only approved tyre mounting lubricants or mild vegetable oil, or soap solution. Never use antifreeze, silicones or petroleum-based lubricants. This will damage the tyre.
16. ALWAYS inspect the valve cores for proper air retention. Replace damaged or leaky cores.
17. ALWAYS inflate tyres to tyre manufacturer's recommended cold inflation pressure for the tyre's intended service.
18. When inflating a tyre, not on a vehicle, use a safety cage or other restraining device, & an extension hose with an in-line air gauge & clip-on air chuck, which allows the operator to stand clear of the trajectory.
19. For tube-type tyres, inflate to service pressure without the valve core installed & then completely deflate the tyre to prevent wrinkles in the tube. Insert the valve core & re-inflate the tyre to recommended service pressure as specified for the tyre & rim.
20. ALWAYS use sealing valve caps to prevent loss of air or fluid.

